



**PLAN VIEW - INDIVIDUALLY MOUNTED**

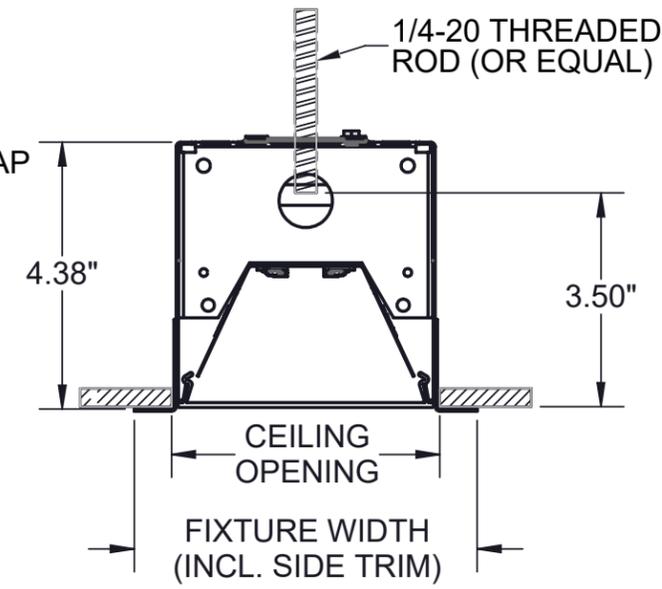


**CROSS SECTION VIEW**

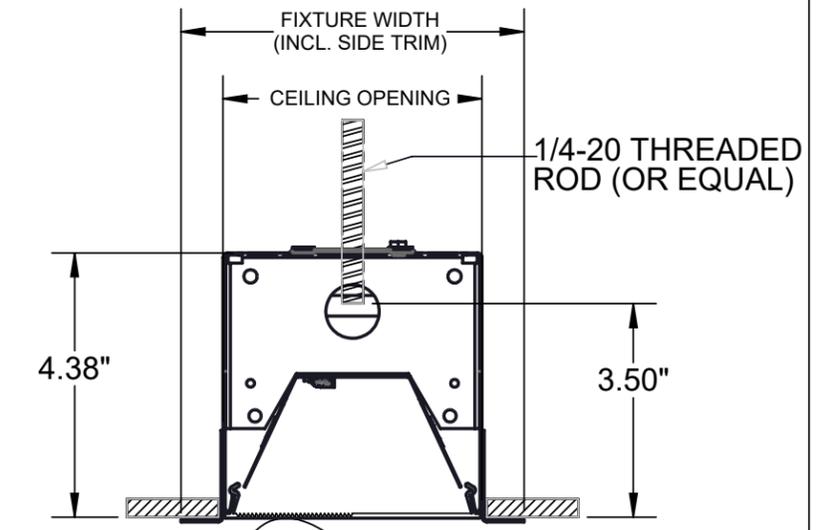

NOTE:  
FOR ASYMMETRIC DIRECT (AD) FIXTURES,  
MAKE SURE THE JAGGED SURFACE  
OF THE LENS IS DIRECTLY UNDER  
THE LED WHEN REPLACING THE LENS.

LIGHT DISTRIBUTION  
POLAR CURVE  
(REFERENCE ONLY)

**ASYM SECTION VIEW**

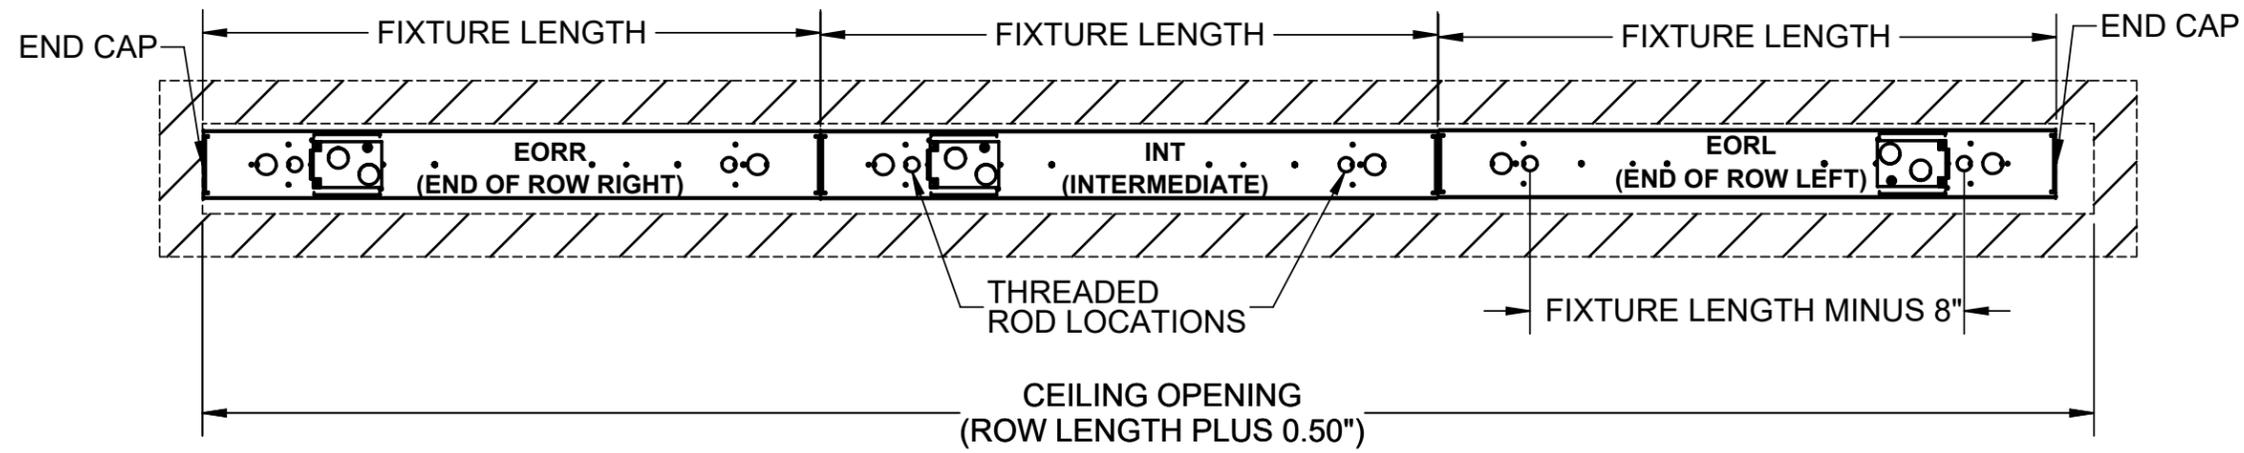

**PLAN VIEW - ROW MOUNTED**

**CEILING OPENING:**

3L-3.50"  
4L-4.75"  
6L-6.75


**FIXTURE WIDTH (INCL. TRIM)**

3L-4.41"  
4L-5.63"  
6L-7.63"

- GENERAL NOTES: (READ SHEETS COMPLETELY BEFORE STARTING)**
1. LEAVE PROTECTIVE WRAPPING ON FIXTURE UNTIL START OF INSTALLATION.
  2. REFER TO SUPPLEMENTAL WIRING INSTRUCTION SHEET 510401 WHEN MAKING WIRING CONNECTIONS.
  3. FIXTURES ARE MOUNTED, SUPPORTED BY (2) 1/4-20 THREADED RODS SUPPLIED BY INSTALLER.
  4. APPROXIMATE WEIGHT OF FIXTURE IS 3.50 LBS PER FOOT OF LENGTH.

<b>TOOLS REQUIRED</b>	<b>SUPPLIED BY INSTALLER</b>
- SCREWDRIVER/DRILL - 11/32" NUT DRIVER	- THREADED RODS

1

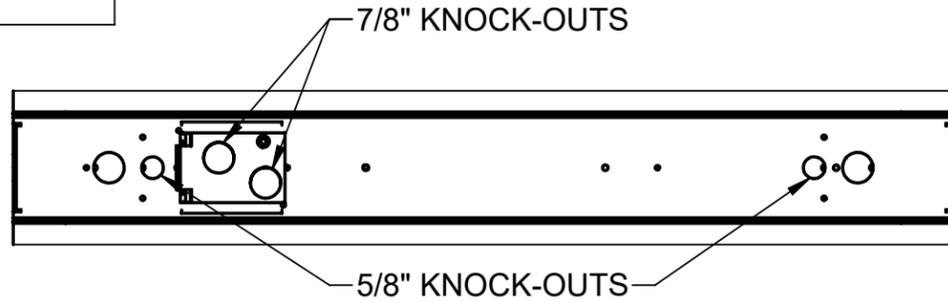


REMOVE (1) 7/8" KNOCK-OUT FROM TOP OF HOUSING AT DESIRED FEED LOCATION.

REMOVE BOTH 5/8" KNOCK-OUTS AT ENDS OF HOUSING FOR THREADED ROD ATTACHMENT. IF INSTALLING ROW, REPEAT FOR ALL FIXTURES.


NOTE: AT CORRECT LOCATIONS IN CEILING, INSTALL (2) 1/4-20 THREADED RODS PER FIXTURE. SEE PLAN VIEW ON PAGE 1. THREADED RODS MUST END 3.50" ABOVE FINISHED CEILING.

3

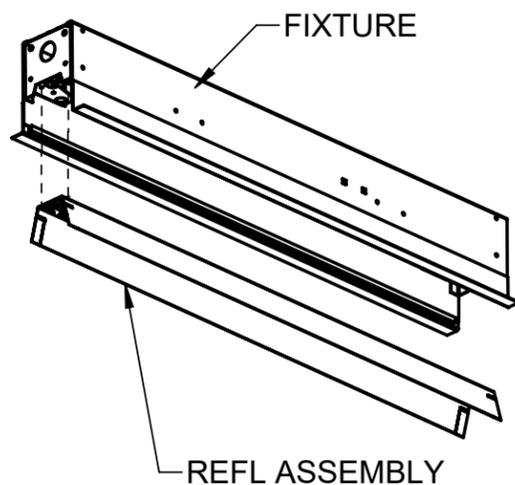


DETACH LED REFLECTOR MODULES BY REMOVING 8-32 MACHINE SCREWS.

2

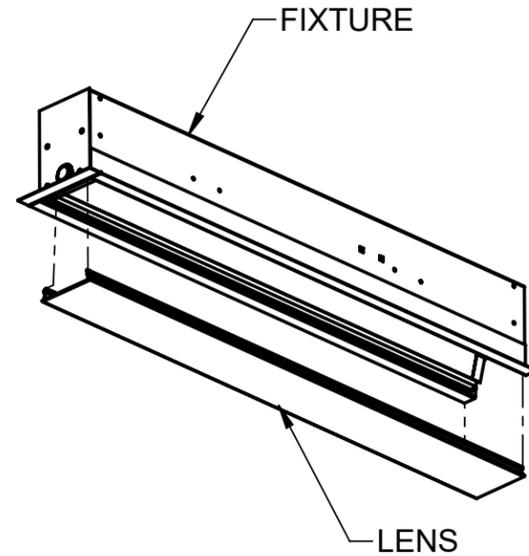

TO REMOVE LENS, PULL LENS GAP COVER DOWN AND INSERT SCREWDRIVER OR FLATHEAD PRY TOOL INTO THE END OF THE HOUSING AND PULL DOWN.

4

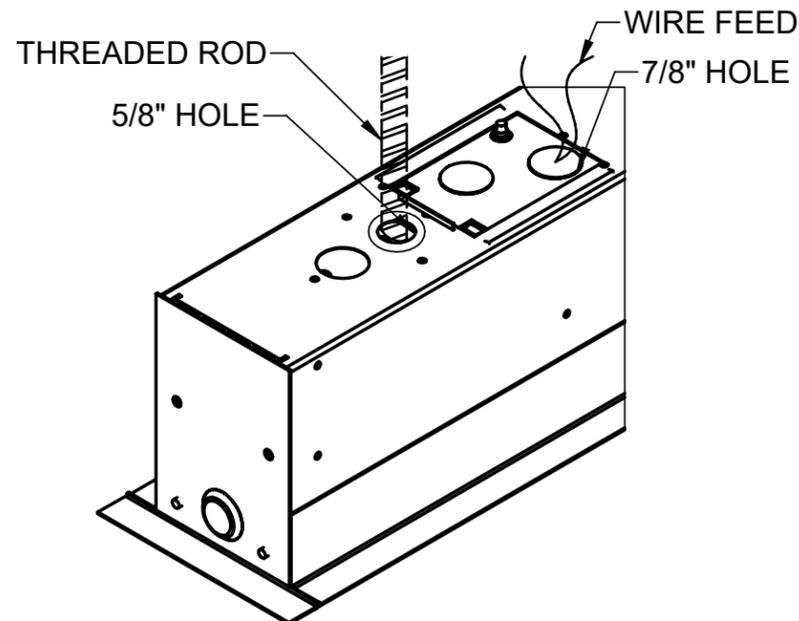


LIFT FIXTURE UP NEAR CEILING OPENING AND BRING ELECTRICAL FEED INTO FIXTURE WIREWAY THROUGH ACCESS PLATE. RAISE FIXTURE UP FLUSH TO CEILING OPENING AND SECURE TO THREADED RODS WITH FENDER WASHERS AND NUTS AS SHOWN ABOVE. (FOUND IN POLYBAG)

MAKE ALL ELECTRICAL CONNECTIONS IN FIXTURE WIREWAY AND RE-INSTALL ACCESS COVER PLATE.

5

COMPONENTS REMOVED FOR CLARITY.

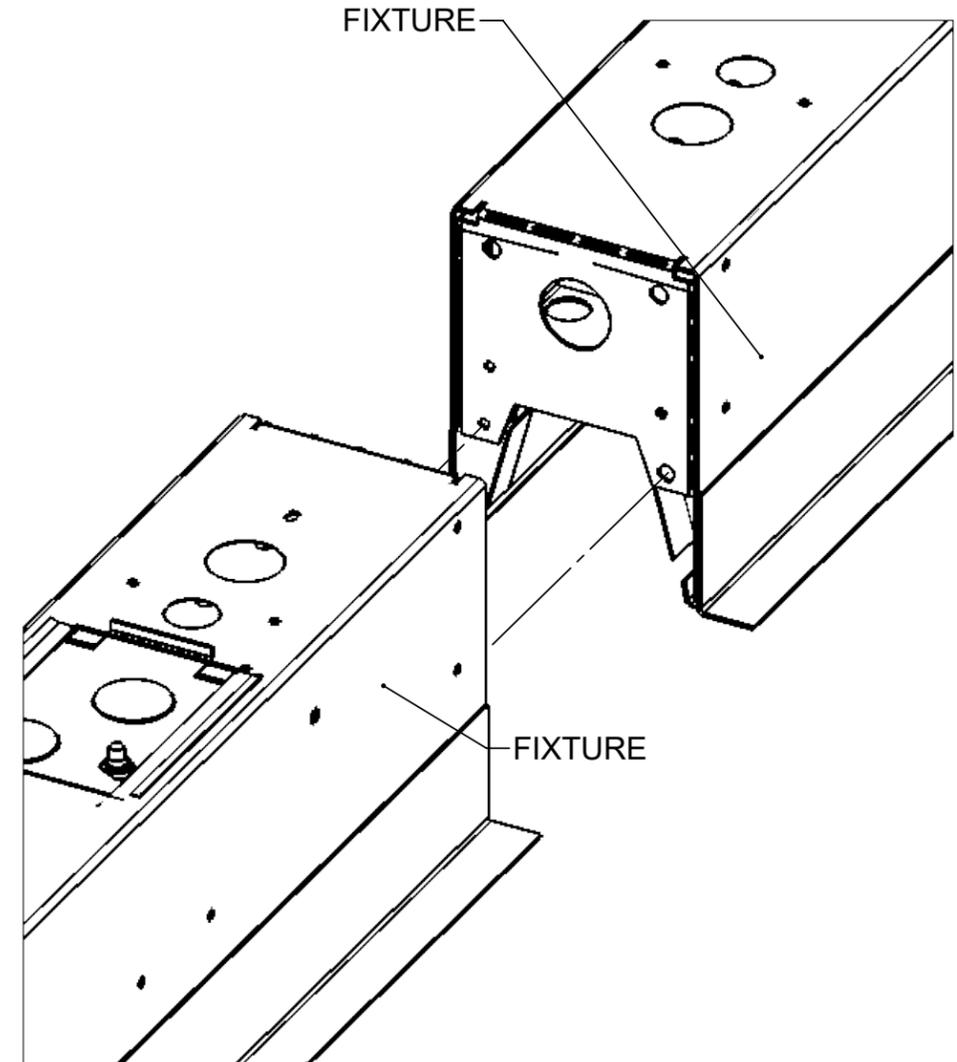


REPEAT STEPS 1-4. LOOSELY BOLT ADJOINING FIXTURE TO THE PREVIOUS FIXTURE THROUGH BOTH END HEADERS AS SHOWN ABOVE. ALIGN SEAMS AT ROW JOINTS BEFORE TIGHTENING SCREWS.

BRANCH CIRCUIT WIRES CAN BE ROUTED THROUGH 7/8" HOLE IN END HEADERS.

6

**LENS REMOVAL**


SOME COMPONENTS HIDDEN FOR CLARITY

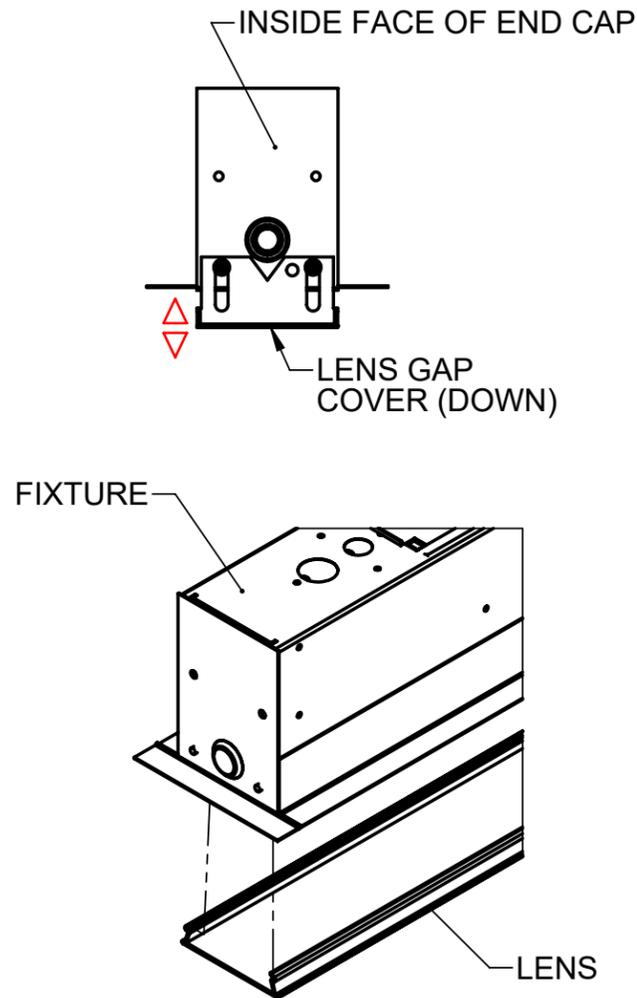

TO REMOVE, PULL LENS GAP COVER DOWN AND INSERT SCREWDRIVER OR FLATHEAD PRY TOOL INTO THE END OF THE HOUSING AND PULL DOWN.

7

**ACCESS PLATE REMOVAL**

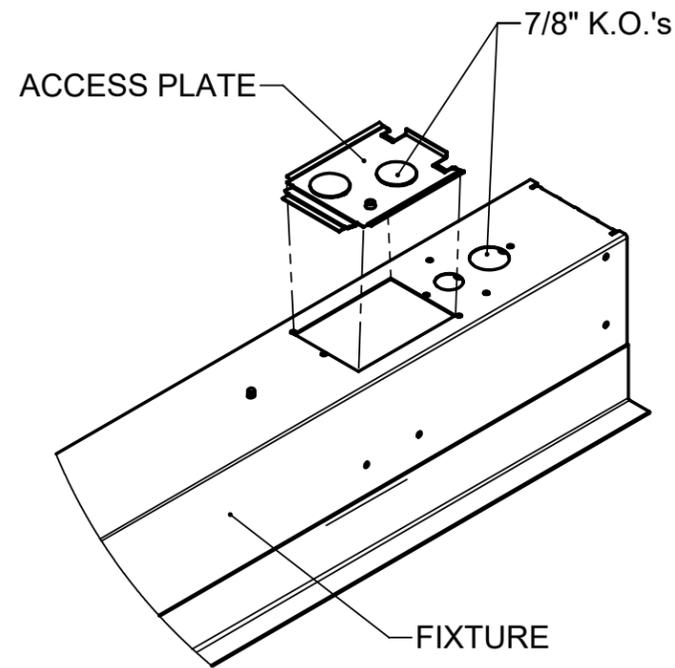


REMOVE ACCESS COVER FROM FIXTURE HOUSING BY SLIDING THE COVER AND SHIFTING IT OUT. REMOVE 7/8" KNOCK-OUT AT DESIRED FEED LOCATION.

8

**END CAP REMOVAL**

SOME COMPONENTS HIDDEN FOR CLARITY

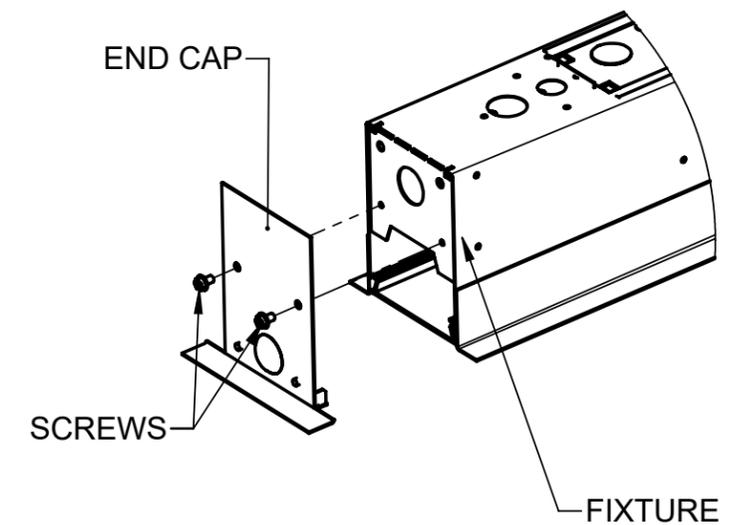


REMOVE THE END CAP ASSEMBLIES BY REMOVING (2) #8 SCREWS AS SHOWN. FOR INDIVIDUAL FIXTURE, DO SO AT BOTH ENDS. FOR ROW, DO SO AT NEAR END OF 1ST FIXTURE AND FAR END OF LAST FIXTURE.

NOTE: SKIP THIS STEP FOR ALL INTERMEDIATE FIXTURES.

9


**LED REFLECTOR ASSEMBLY REMOVAL**

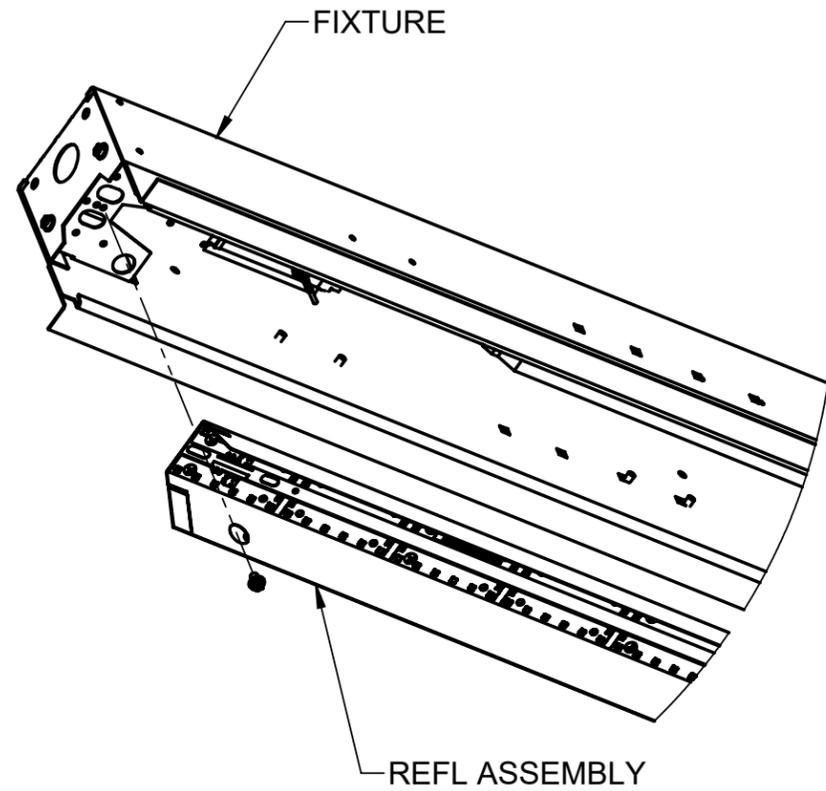

BEFORE REMOVING LED REFLECTOR ASSEMBLY SEE STEP 6 FOR LENS REMOVAL.  
 TO REMOVE LED REFLECTOR ASSEMBLY:  
 REMOVE THE (2) SCREWS AS SHOWN.  
 DISCONNECT WIRE NUTS THAT CONNECT LED WIRES TO DRIVER.  
 DISCONNECT SAFETY TETHERS CONNECTED TO THE LED REFLECTOR ASSEMBLY  
 TO FULLY REMOVE THE LED REFLECTOR ASSEMBLY FROM HOUSING.  
 (TO REPLACE LED REFLECTOR ASSEMBLY REPEAT THE ABOVE STEPS IN REVERSE)

10

**DRIVER REMOVAL**

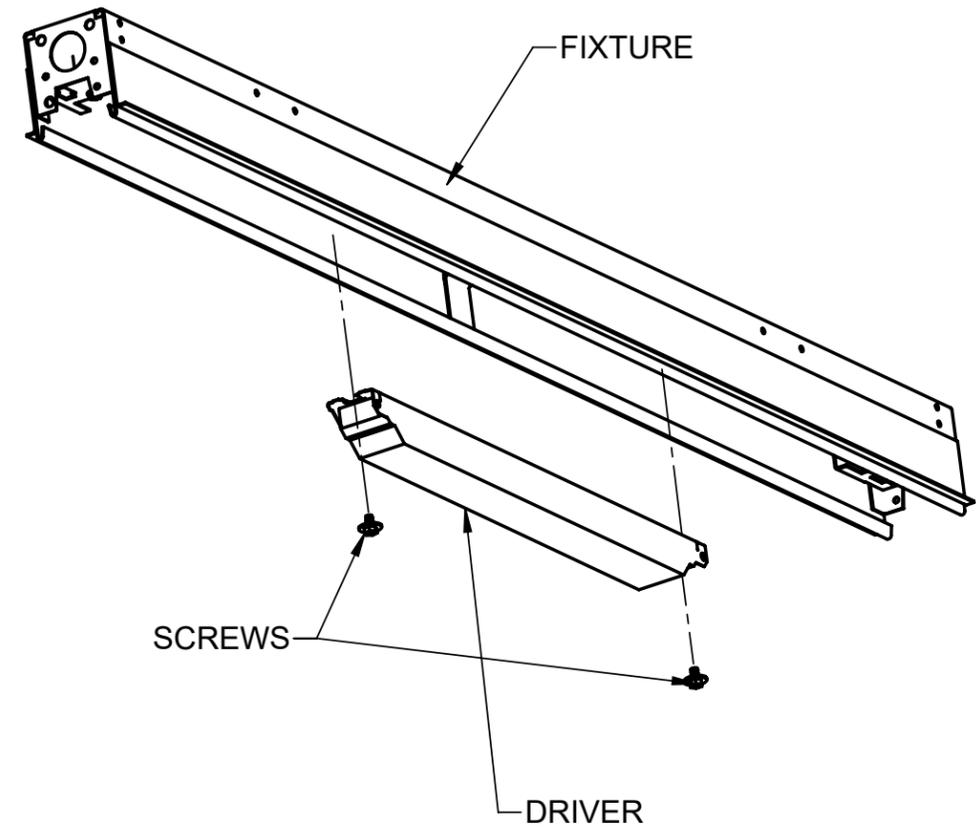

BEFORE REMOVING DRIVER SEE STEPS 6 AND 9 FOR LENS AND LED REFLECTOR ASSEMBLY REMOVAL.  
 REMOVE THE (2) SCREWS AS SHOWN AND REMOVE DRIVER.  
 (TO REPLACE LED REFLECTOR ASSEMBLY REPEAT THE ABOVE STEPS IN REVERSE)