




# INDUSTRIAL LIGHTING GUIDE



Albeo offers a full line of competitively positioned, intelligent, feature rich industrial products ideal for a variety of operating conditions. Our compact and innovative designs feature many industry standard certifications and our rebate programs offer the ultimate in savings providing the total package no matter the application.

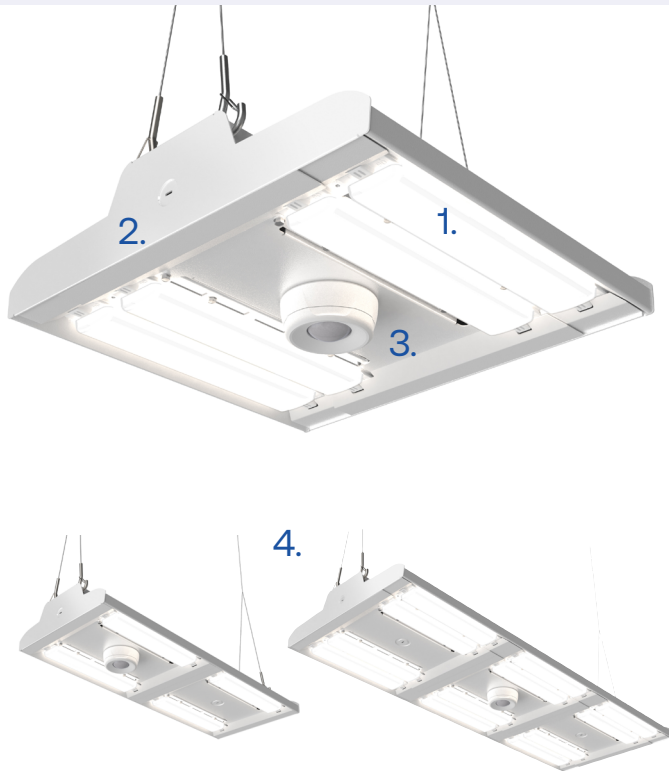

## 1. Efficiency & Cost Savings

Optimize the total cost of ownership with Albeo's market leading efficacies of up to 200 LPW

## 2. Compact Design

Albeo® pioneered the compact highbay design with installers in mind

## 3. Intelligent Solutions

Ez-Connect Wireless Lighting Controls provide solutions that are simple scalable, and flexible

## 4. Scalable

Modular design and fully featured to meet the needs of any industrial project

## In Stock Ready to Ship

Leverage Albeo's [ProLine](#) and Quick Ship programs to meet critical project timelines.










## HIGH BAY PRODUCT SELECTION GUIDE

	VALUE	COMMERCIAL	SPECIFICATION
			
	<b>PRC</b>	<b>PHB</b>	<b>ABC</b>
<b>Features</b>	+	+	++
<b>Sizes</b>	11.8"/14.2" Dia	14.2"/19.8"	Scalable
<b>Mounting Height</b>	Up to 40'	Up to 40'	Up to 100'
<b>Lumens</b>	15,000-35,000	15,000-36,000	10,000- 48,000
<b>Wattage</b>	100-240W	97-242W	62- 313W
<b>Efficacy (Max)</b>	160	161	160
<b>Voltage</b>	120-347V	120-347V	120-277V, 347V, 480V
<b>CRI</b>	80	80	70, 80
<b>CCT</b>	4000K, 5000K	4000K, 5000K	4000K, 5000K
<b>Switchable Technology</b>	Switchable Lumen & CCT	Switchable Lumen & CCT	Switchable Lumen
<b>Color/Finish</b>	Black	White	White, Black
<b>Lens</b>	Polycarbonate	Polycarbonate	No Lens, Polycarbonate, Acrylic
<b>Distribution</b>	Wide	Medium, Narrow, Wide	Medium, Narrow, Wide
<b>Temperature Range</b>	-40° to 50° C	-40° to 55° C	-30° to 50° C
<b>Emergency Battery Pack</b>	40W Field Installable	25W	20W, 30W
<b>Ratings</b>	IP65, Wet, NSF2 Non-Food Zone, NEMA 4X, IK07	IK08: Damp	IK10; Damp
<b>DLC® DesignLights Consortium</b>	Standard	Standard	Standard
<b>Buy America(n) Solutions</b>	-	-	Yes (Option)
<b>Stand Alone</b>	Yes	Yes	Yes
<b>Daintree One</b>	-	-	Yes
<b>EZ Connect</b>	-	-	Yes
<b>Daintree Networked</b>	-	-	Yes
<b>Uses</b>	Industrial, Gymnasium, Warehouse, Big Box Retail, Garden Center	Industrial, Gymnasium, Warehouse, Big Box Retail	Industrial, Gymnasium, Warehouse, Big Box Retail



Current's Rebate Search makes it easy to find real-time incentives offered by some utilities on our most popular products. Let the Rebate Search do the work for you. See Utility Rebate Search under Resources > Tools at [LED.com](https://www.led.com).

## HAZARDOUS & DEMANDING PRODUCT SELECTION GUIDE

	VALUE	COMMERCIAL	SPECIFICATION				
							
	<b>PLR</b>	<b>ALR</b>	<b>AHG</b>	<b>ABN</b>	<b>ABR</b>	<b>AHH</b>	<b>AH2A</b>
<b>Features</b>	+	++	++	+++	+++	+++	+++
<b>Sizes</b>	4',8'	2', 4', 8'	4', 8'	17.3" Dia	16"/ 32.5"	16"/ 32.5"	15.7"
<b>Mounting Height</b>	Up to 15'	Up to 25'	Up to 20'	Up to 30'	Up to 60'	Up to 60'	Up to 35'
<b>Width</b>	3.5"	4.5"/ 6.75"	6.75"	-	19.3"	19.3"	9.8"
<b>Lumens</b>	5,000- 12,000	2,000- 20,000	5,000- 16,000	9,000- 28,000	9,000- 60,000	9,000- 60,000	5,000- 18,000
<b>Wattage</b>	38- 90W	14- 174W	47- 136W	58- 176W	55- 360W	44-410W	34- 102W
<b>Efficacy (Max)</b>	148	164	123	166	178	165	179
<b>Voltage</b>	120-347V	120-277V, 347V, 480V	120-277V, 347V, 480V	120-277V, 347V, 480V	120-277V, 347V, 480V	120-277V, 347V, 480V	120-277V, 347V, 480V
<b>CRI</b>	80	80, 90	80	80, 90	70, 80	70, 80	70
<b>CCT</b>	3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K
<b>Switchable Technology</b>	Switchable Lumen & CCT	-	-	-	-	-	-
<b>Color/Finish</b>	Gray	White	White	White	White	White	Gray
<b>Lens</b>	Frosted Polycarbonate	Acrylic, Polycarbonate	Acrylic, Polycarbonate	Polycarbonate	Glass, Polycarbonate	Glass, Polycarbonate	Glass, Polycarbonate
<b>Distribution</b>	Lambertian	Lambertian	Lambertian	Wide, Medium	Wide, Medium, Narrow	Wide, Medium, Narrow	Wide, Wall
<b>Temperature Range</b>	-40° to 45° C	-30° to 45° C	-40° to 40° C	-30° to 55° C	-30° to 65° C	-30° to 60° C	-40° to 65° C
<b>Emergency Battery Pack</b>	-	10W	10W	-	-	-	-
<b>Ratings</b>	IP65, Wet, NSF2 Non-Food Zone, NEMA 4X	IP65,66,67; Wet, UL Sanitation, NEMA4X,IK06	IP65,66,67; C1D2; Wet	IP65,66,69; Wet; NSF; NEMA4X	IP66; Wet	IP66; C1D2; NEMA4X	IP66; Wet; C1D2; C2D1; C2D2; C3D1/2; Simultaneous Prescense; NEMA4X, IP66
<b>DLC® DesignLights Consortium</b>	Standard	Standard	Standard	Standard	-	Standard	-
<b>Buy America(n) Solutions</b>	-	Yes (Option)	-	-	Yes (Option)	-	-
<b>Stand Alone</b>	Yes	Yes	Yes	Yes	Yes	Yes	-
<b>Daintree One</b>	-	Yes	-	Yes	-	-	-
<b>EZ Connect</b>	-	Yes	-	Yes	-	-	-
<b>Daintree Networked</b>	-	Yes	-	Yes	-	-	-
<b>Uses</b>	Wash Down, Cold Storage, Parking Garage, Wet Locations	Wash Down, Cold Storage, Parking Garage, Wet Locations	Heavy Industrial, Complex Environment	Food Processing, NSF Requirements	Heavy Industrial, Complex Environment	Heavy Industrial, Complex Environment	Heavy Industrial, Complex Environment



ALBEO

ARIZE

DAINTREE WIRELESS CONTROLS

EVOLVE

FORUM

GE LAMPS

GTX

IMMERSION

LIGHTGRID

LUMINATION

TETRA

**Current - GLI Brands**

25825 Science Park STE 400  
Beachwood, OH 44122-7392

**LED.com/Albeo**

© 2024 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev 11/30/21)

ALB\_Industrial\_SS\_R01

---