

Albeo® PRC Series

LED IP65 Selectable Round High Bay



Versatile Performance

- Universal 120-347V with 0-10V dimming to 10%
- Diecast aluminum with polycarbonate lens
- Suitable for -40°C to 50°C ambient temp



IP65





DIMMABLE

3 Lumen Outputs, 2 CCTs

- Selectable 15K/18K/21K or 24K/30K/34K Lumens
- Selectable 4000K/5000K CCT, 80 CRI



Choose from 2 Sizes

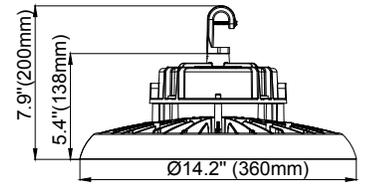

Size 1X

5.5 lbs

Selectable	100W	15,000lm
	120W	18,000lm
	150W	21,000lm

Up to 155 LPW



Size 2X

6.0 lbs

Selectable	150W	24,000lm
	200W	30,000lm
	240W	34,000lm

Up to 160 LPW

Field Installable Sensor



Mounting Options

- Hook (1/2" NPT) and 6ft cord included



See spec sheet for additional mounting options and accessories

Ideal choice for distributors with affordable versatility, less SKUs

The Albeo® PRC Series is an NSF and IP65 rated wet location round high bay with an exceptional mixture of value and performance. Offering universal 120-347V, selectable lumens and CCT, field-installable sensors and accessories, the PRC is the ideal solution for a wide range of industrial and commercial applications including:

- Food and Beverage Processing
- Commercial Kitchens
- Cold Storage
- Manufacturing Facilities



Size: 11.8" Dia. or 14.2" Dia.

Lumen Range: Selectable 15,000-34,000 lumens

Lumens Per Watt: Up to 160 LPW

Housing: Die Cast Aluminum

Finish: Powder Coat, Black

Lens: Clear Polycarbonate

Wattage Range: 100 - 240W

CCT/CRI: Selectable 4000K / 5000K

CRI: 80 CRI

Voltage: 120 - 347V

Dimming: 0-10V Dimming to 10%

Options: Sensor, Wall Mount Bracket, Wire Guard, Polycarbonate Refractor, Drop Lens, Aluminum Reflector



Want to learn more?

For Specific product technical questions, contact: lightingproinfo@currentlighting.com