



Decorative High Bay

Current @



The Savvano™ is a decorative high bay available in a wide range of decorator friendly colors and available in two sizes (16" and 22"). It has 5 different lumen levels, 2 different reflector options and 5 color temperatures.


Features

- Overall fixture shape and style
- Variety of colors available
- Large selection of reflector sizes and types
- Up to 123 lumens per watt
- Five lumen levels from a low of 8,000 lumens to a max of 28,000 lumens
- 4 reflector bottom lens options

Applications



Fitness Gyms

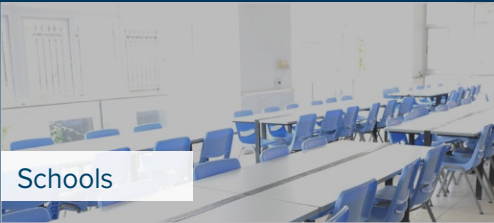

Schools



Gymnasiums



Retail




CDL




P95 (Frosted Acrylic)
CLR (Clear Acrylic)



DLR

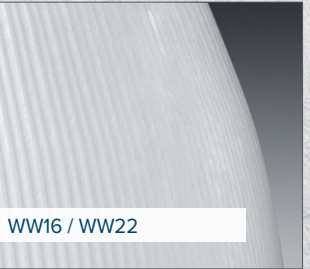

WW16 / WW22

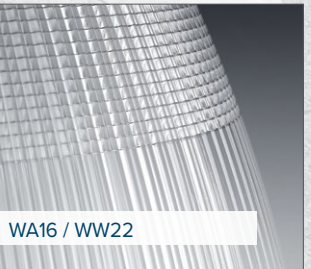

WA16 / WA22



Options and Accessories



HookLoop Cord



Fusing




Pendant Mount

Photometry


SAV-MH-50-8-WW22-N-U-GG

POLAR GRAPH

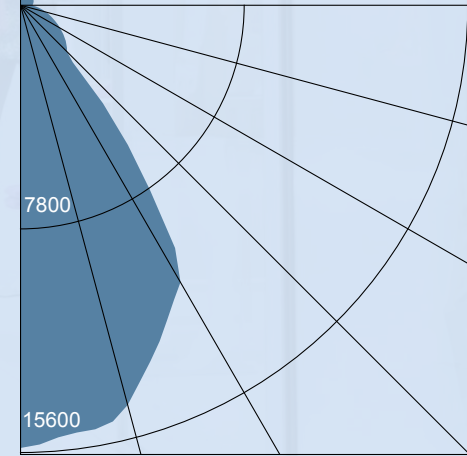


SAV-ML-35-8-WA22-N-U-GG

POLAR GRAPH

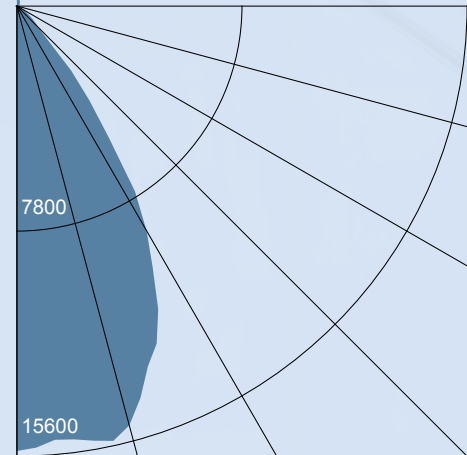


Dimensions

22" Option

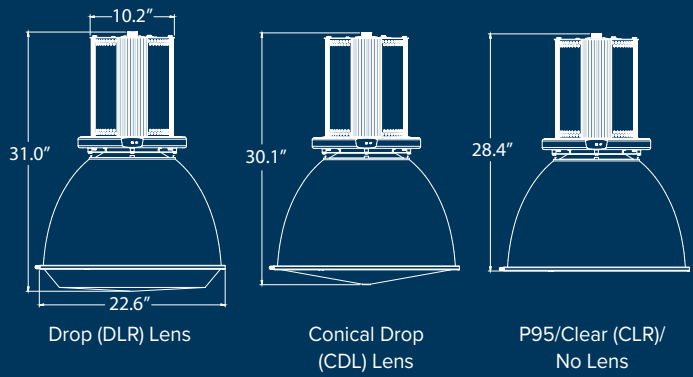

16" Option

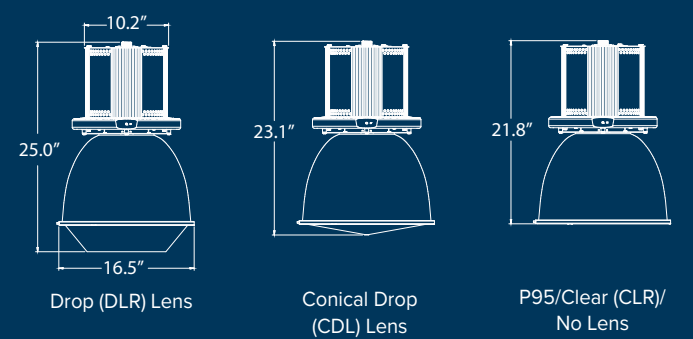

Electrical Data

Lumens	CCT	CRI	Reflector	Lens	Catalog String	Lumen Output	Watts	Luminaire Efficacy	Ambient Temp Rating	Spacing Ratio	AMPS					
											120V	208V	240V	277V	347V	480V
LH	3500	80	WA16	N	SAV-LH-35-8-WA16-N-X-XX	8142	73	112	50°C	0.9	0.61	0.35	0.31	0.31	0.21	0.15
LH	3500	80	WW16	N	SAV-LH-35-8-WW16-N-X-XX	7986		109.8	50°C	0.98						
LX	3500	80	WA16	N	SAV-LX-35-8-WA16-N-X-XX	10942	95	114	50°C	0.89	0.81	0.47	0.41	0.41	0.28	0.20
LX	3500	80	WW16	N	SAV-LX-35-8-WW16-N-X-XX	10783		112.8	50°C	0.97						
ML	3500	80	WA22	N	SAV-ML-35-8-WA22-N-X-XX	17040	153	110.6	40°C	0.94	1.25	0.73	0.64	0.57	0.45	0.34
ML	3500	80	WW22	N	SAV-ML-35-8-WW22-N-X-XX	17878		116.7	40°C	1.02						
MM	3500	80	WA22	N	SAV-MM-35-8-WA22-N-X-XX	19324	177	108.7	40°C	0.93	1.48	0.86	0.77	0.68	0.52	0.38
MM	3500	80	WW22	N	SAV-MM-35-8-WW22-N-X-XX	20293		114.5	40°C	1.02						
MH	3500	80	WA22	N	SAV-MH-35-8-WA22-N-X-XX	23369	219	105.1	40°C	0.93	1.83	1.04	0.92	0.81	0.64	0.47
MH	3500	80	WW22	N	SAV-MH-35-8-WW22-N-X-XX	24495		111.7	40°C	1.02						

Replacement Parts

	Part NAME	DESCRIPTION	P/N	QTY
LED BOARDS	LED PCBA	LED Board - MH Output, 3500K CCT, 80 CRI	93076455-2005	1
		LED Board - MM Output, 3500K CCT, 80 CRI	93077856-2005	1
		LED Board - ML Output, 3500K CCT, 80 CRI	93077667-2005	1
		LED Board - LX Output, 3500K CCT, 80 CRI	93076354-2005	1
		LED Board - LH Output, 3500K CCT, 80 CRI	93078098-2005	1
DRIVERS	LED DRIVER	MH Output - 120V-277V	93080133	1
		MH Output - 347V-480V	93081746	1
		MM Output - 120V-277V	93080969	1
		MM Output - 347V-480V	93081746	1
		ML Output - 120V-277V	93080970	1
		ML Output - 347V-480V	93081769	1
		LX Output - 120V-277V	93076331-800	2
		LX Output - 347V-480V	93077419-800	2
		LH Output - 120V-277V	93077416-600	2
		LH Output - 347V-480V	93077419-600	2

Ordering Guide

Example: SAV-MH-27-8-WA22-P95-U-WW-F(X)

SAV						
Model	Lumen Output	CCT	CRI	Optic	Lensing	Voltage
SAV	LH Low Bay Low Output (8,000 lm)	27 2700K	8 80	Low Bay — 16"	N None	U Universal
Savvano™	LX Low Bay Med Output (12,000 lm)	30 3000K	9 90	WA16 Clear Acrylic	P95 Frosted Acrylic Lens	1 120V
LED	ML High Bay Low Output (18,000 lm)	35 3500K		WW16 Translucent White	CDL Conical Drop Lens	2 208V
High Bay	MM High Bay Med Output (22,000 lm)	40 4000K		High Bay — 22"	CLR Clear Acrylic	3 240V
	MH High bay High Output (28,000 lm)	50 5000K		WA22 Clear Acrylic	DLR Dropped Lens Refractor	4 277V
				WW22 Translucent White		F 347V
						5 480V

Color ¹	Options
WW White Wash	F(x) Fusing
GG Gunmetal Gray	C(y)HLP(x) Cord, Hook, Loop & Plug (15A)
BL Black	SCL Sensor Control, Low Voltage ^{2,3}
RD Red	WG23A Bottom Wire Guard for SB22, WA22, WW22
BS Blue Steel	WG16 Bottom Wire Guard for SB16, WA16, WW16
CH Champagne	
HG Hunter Green	
SB Serenity Blue	
CR Currant	
WN Wine	

Notes:
1 Custom colors available upon request. Please consult factory for details.
2 SCL limits ambient temperature to no more than 35°C
3 SCL is available in 120V, 277V and 347V only
Replace (X) with the voltage, 1=120V, 2=208V, 3=240V and 4=277V.
Replace (y) with the length, 4=4ft, 6=6ft, 8=8ft., 10=10ft., 12=12ft.



Current Lighting Solutions, LLC

701 Millennium Blvd.
Greenville, SC 29607

currentlighting.com/columbialighting

© 2026 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Rev 05/04/26

COL_SAV_B_R02