



EXO

Product

Portfolio

Your Leading Outdoor Stocking Brand



Current

Innovative Technology, Practical Solutions



What's Inside

SLING Family	4-6
Area/Site	6-7
Poles & Accessories	6
Wall Mount	8-10
Canopy & Bollard	11
Floodlighting	12-13
RGBW	13



QUALITY
FIRST



FAST SERVICE
AND AVAILABILITY



COMPREHENSIVE
PRODUCT LINE



AFFORDABLE
RESULTS

EXO Outdoor Lighting leverages the extensive knowledge of outdoor luminaire design with industry leading performance, uniformity, and contractor friendly installation in outdoor lighting applications. EXO offers customers quick access to a selection of quality-engineered product families which make choosing and installing fixtures fast, simple and easy. In stock and ready to perform.

Visit the EXO website for full product information, spec sheets and more!



SLING SERIES

The Sling series provides a full site solution for applications ranging from general ambient lighting to illuminating building accents. All luminaires are available in stock configurations making them easy to get on site quickly. Each product has a five year Current Lighting warranty providing ultimate peace of mind.

SLING AREA/SITE

Compact sleek design featuring arm or mast arm fitter, switchable wattage and CCT, ships with Type 3, Type 4, and Type 5 optics, which can easily be changed in the field.

SLING FLOODLIGHT

This compact flood is available in three sizes and a broad selection of wattages between 20W and 320W making it ideal for lighting a variety of spaces. The wide distribution provides even illumination while maintaining a powerful punch.

SLING DUSK-TO-DAWN

This stylish dusk-to-dawn area luminaire can be pole or wall mounted and comes standard with a drop-down lens and integral twist lock photocell.

SLING CANOPY

The low-profile Sling canopy luminaire provides a perfect retrofit solution for existing HID canopy luminaires up to 250W. The impact resistant polycarbonate lens increases durability while also reducing unwanted glare.

SLING WALL

This slender wallpack is available in two sizes for a variety of applications. It's low profile form and wide range of outputs provide a scalable solution for mounting heights from 8 to 20 feet.

Area & Site

AREA/SITE/SECURITY

SLING Dusk-to-Dawn




SGD

SLING Site



SGS

AIRO

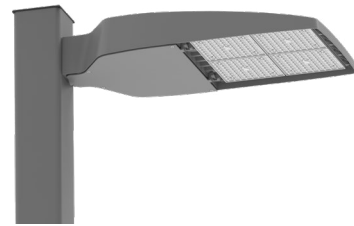

ASL

Features	Service Program	STOCK	STOCK	QS10
	Wattage Range	Switchable: 40W - 60W	Switchable: 85W - 150W	35W - 255W
	Lumen Range	5,700 - 8,300	13,000 - 23,000	5,500 - 36,000
	Efficacy (LPW)	Up to 156 LPW	Up to 171 LPW	Up to 148 LPW
	Color Temperature (CCT)	Switchable: 4000K, 4500K, 5000K	Switchable: 3000K, 4000K, 5000K	3000K, 4000K, 5000K
	Input Voltage	120-277V	120-347V	120-277V, 347V, 480V
	Operating Temperature	-40C to 40C	-40C to 50C	-40C to 40C
	Distribution	Type 5	Ships with T3, T4, and T5 Optics	T2, T3, T4F, T4W, T5QW
	Finish Color	Gray or Dark Bronze	Dark Bronze	Black, Dark Bronze, Graphite, Grey, Platinum Silver, White, Verde Green
	Mounting Options	Clamp for 1-5/8" to 2-3/8" diameter pipe 24" or 30" Arm Accessory, available	Arm Mount or Mast Arm Fitter with Knuckle	Arm, Universal, Adjustable Arm, Decorative Upswept Arm, MAF, Knuckle, Trunnion, Wall
Controls Options	3-pin receptacle with photocontrol, standard	Available with 7-pin receptacle with photocontrol Field installable occupancy & daylight sensor available	NX Networked Controls, Bluetooth Programmable Controls, 7-Pin Receptacle	
Surge Protection	6kV, standard	10kV, standard	6kV, standard 10kV, optional	
Ratings				
Warranty	5 Years	5 Years	5 Years	
Legacy Equivalent	175W HID	250W HID	250W - 400W	

Poles & Accessories



Wall Mount

FULL CUTOFF WALL MOUNT


SLING Wall



SLING Pivot








Prelude



SG1 & SG2

SGW

PRL

Features	Service Program	STOCK	 STOCK	 STOCK
	Wattage Range	10W - 80W	Switchable: 30W - 120W	Switchable: 18W - 60W
	Lumen Range	2,200 - 8,000	4,400-17,000	2,500 - 8,500
	Efficacy (LPW)	Up to 113 LPW	Up to 153 LPW	Up to 141 LPW
	Color Temperature (CCT)	3000K, 4000K, 5000K	Switchable: 3000K, 4000K, 5000K	4000K
	Input Voltage	120-277, 347-480V	120-347V	120-277V
	Operating Temperature	-40C to 40C	-40C to 40C	-40C to 40C
	Distribution	Forward Throw	Type 4 / Adjustable up to 30 degrees	Type 3
	Finish Color	Black, Dark Bronze, Graphite, Grey, Platinum Silver, White, Verde Green	Dark Bronze	Dark Bronze
	Mounting Options	Four 1/2" threaded conduit hubs Mounts to 4" j-box	Three 1/2" conduit entries on top and sides	Mounts to standard 3.5" junction box
	Controls Options	Photocontrol, optional	Photocontrol, standard	N/A
	Surge Protection	10kA	6kV	4kV
Ratings				
Warranty	5 Years	5 Years	5 Years	
Legacy Equivalent	100W - 250W HID	150W - 400W HID	150W - 250W HID	

FULL CUTOFF WALL MOUNT

LitePak Compact



LitePak



Marshal



Vaportites







LNC

LNC2

ML

VBGL2 & VWGL2

	QS10	STOCK	STOCK
13W - 22W	10W - 45W	Switchable: 26W - 50W	20W
800 - 2,100	1,000 - 5,600	3,600 - 7,300	2,700
Up to 95 LPW	Up to 124 LPW	Up to 144 LPW	Up to 136 LPW
3000K, 4000K, 5000K or Amber	3000K, 4000K, 5000K	Switchable: 3000K, 4000K, 5000K	4000K Color Globe Accessories in Red, Green, Blue, Yellow
120-277V	120-277V, 347V, 480V	120-277V	120-277V
-40C to 40C	-40C to 40C	-40C to 40C	-40C to 40C
Type 2, Type 3, or Type 4	Type 2, Type 3, Type 4 Forward, Type 4 Wide	5 x 5	Type 5
Black, Dark Bronze, Graphite, Grey, Platinum Silver, White, Verde Green	Black, Dark Bronze, Graphite, Grey, Platinum Silver, White, Verde Green	Dark Bronze or White	Grey
Quick mount adapter (designed for 4" square junction box)	Quick mount adapter (designed for 4" square junction box)	Mounting plate has 1/2" threaded hubs	Wall: Direct Wall (surface j-box) Ceiling/Pendant: 1/2" Threaded Hub
Photocontrol, optional	Photocontrol, optional Bluetooth Programmable Controls, optional	PIR Occupancy Sensor	N/A
6kV, standard	6kV, standard	4kV, standard	2kV, standard
			
5 Years	5 Years	5 Years	5 Years
50W - 100W HID	70W - 175W HID	Twin 150W Incandescent Lamps	50W - 100W HID

REFRACTOR WALL MOUNT

Perimashield



PRS

WGH



WGH

Perimaliter



PVL & PGM

Features	Service Program	STOCK	STOCK	STOCK
	Wattage Range	20W	Switchable: 20W - 120W	30W - 60W
	Lumen Range	2,900	3,200 - 17,000	3,500 - 7,000
	Efficacy (LPW)	Up to 125 LPW	Up to 162 LPW	Up to 138 LPW
	Color Temperature (CCT)	4000K or 5000K	Switchable: 3000K, 4000K, 5000K	3000K, 4000K, 5000K
	Input Voltage	120-277V	120-347V	120-277V, 347V, 480V
	Operating Temperature	-40C to 40C	-40C to 40C	-40C to 40C
	Distribution	Type 4	Type 4	Type 4
	Finish Color	Dark Bronze	Dark Bronze	Black, Dark Bronze, Graphite, Grey, Platinum Silver, White, Verde Green (PVL Dark Bronze or White only)
	Mounting Options	Mounts on a minimum or 3-3.5" junction box Conduit entrances on bottom and sides	Three 1/2" conduit entries on top and sides	Three 1/2" conduit entries on top and sides
	Controls Options	Photocontrol, standard	Photocontrol, standard PIR Occupancy Sensor, optional accessory	Photocontrol, optional
	Surge Protection	6kV, standard	6kV	10kA
	Ratings			
Warranty	5 Years	5 Years	5 Years	
Legacy Equivalent	150W HID	150W - 400W HID	150 - 250W HID	

CANOPY

SLING



SGC

BOLLARD

SLING



SGB

Features	Service Program	STOCK	STOCK
	Wattage Range	Switchable: 25W - 60W	Switchable: 12W - 22W
	Lumen Range	3,500 - 8,300	1,150 - 2,600
	Efficacy (LPW)	Up to 165 LPW	Up to 121 LPW
	Color Temperature (CCT)	Switchable: 3000K, 4000K, 5000K	Switchable: 3000K, 4000K, 5000K
	Input Voltage	120-277V	120-277V
	Operating Temperature	-40C to 40C	-40C to 40C
	Distribution	Type 5	Type 5
	Finish Color	Dark Bronze	Dark Bronze
	Mounting Options	Standard J-Box - 3/4" Pendant 3 sided 1/2" 14 NPS threaded conduit entry	Anchor Bolts, included
	Controls Options	N/A	N/A
	Surge Protection	6kV, standard	6kV, standard
	Ratings		
Warranty	5 Years	5 Years	
Legacy Equivalent	100W - 250W HID	70W - 100W HID	

FLOODLIGHTING

SLING



COLT



Lightscaper



SGF

LBUL

LSP

Service Program	SWITCHABLE WATTAGE & CCT	SWITCHABLE WATTAGE & CCT	SWITCHABLE WATTAGE & CCT
Wattage Range	Switchable: 20W - 320W	Switchable: 13W - 25W	Switchable: 8W - 16W
Lumen Range	3,000 - 47,000	1,800 - 3,600	980 - 2,000
Efficacy (LPW)	Up to 163 LPW	Up to 153 LPW	Up to 128 LPW
Color Temperature (CCT)	Switchable: 3000K, 4000K, 5000K	Switchable: 3000K, 4000K, 5000K	Switchable: 3000K, 4000K, 5000K
Input Voltage	120-347V	120-277V	120-277V
Operating Temperature	-40C to 40C	-40C to 40C	-40C to 40C
Distribution	7 x 7	5 x 5	7 x 6
Finish Color	Dark Bronze	Dark Bronze	Dark Bronze
Mounting Options	SGF1 Knuckle Mount SGF2 & SGF3 Knuckle & Trunnion	Knuckle 6" Ground Stake, included	Knuckle
Controls Options	Photocontrol, standard	N/A	N/A
Surge Protection	6kV, standard	4kV, standard	4kV, standard
Ratings			
Warranty	5 Years	5 Years	5 Years
Legacy Equivalent	100W - 750W HID	75W - 150W HID	75W - 100W HID

RGBW FLOODLIGHTING

SLING




SLING




LBUL RGBW

SGB

Service Program	SWITCHABLE RGBW	SWITCHABLE RGBW
Wattage Range	Switchable: 20.5W	Switchable: 17W
Lumen Range	2,532	142 - 1,950
Efficacy (LPW)	Up to 123 LPW	Up to 114 LPW
Color Temperature (CCT)	Switchable: RGBW	Switchable: RGBW
Input Voltage	120-277V	120-277V
Operating Temperature	-40C to 40C	-40C to 40C
Distribution	6 x 6 Wide	7 x 6 Wide
Finish Color	Dark Bronze	Dark Bronze
Mounting Options	Universal 1/2" 14 NPS swivel knuckle	Universal 1/2" 14 NPS swivel knuckle
Controls Options	N/A	N/A
Surge Protection	4kV, standard	4kV, standard
Ratings		
Warranty	5 Years	5 Years
Legacy Equivalent	N/A	N/A

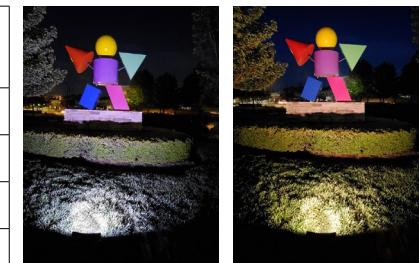

WW (White+White) WB (White+Blue)

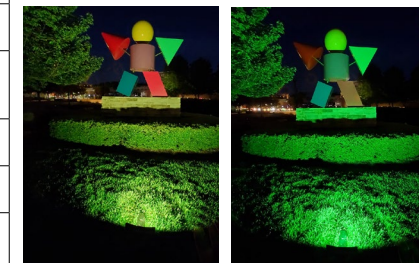

WG (White+Green) GG (Green+Green)



RR (Red+Red) BB (Blue+Blue)



Adjustable Knuckle Mount



Features

RGBW

Always On.

At Current®, we're inspired by the people who design, craft, live, work & play in spaces. Our award-winning family of brands is dedicated to offering bold integrated solutions, while providing the essential tools for designing connected lighting environments, both indoors and out.

Only Current can provide reliable performance, responsive service, and the uncompromising quality you expect from an industry leader every time, always.

Our Vertical Markets



Commercial

Stores, Offices, Hotels, Supermarkets, Restaurants, Healthcare, Education



Industrial

Manufacturing Centers, Warehouses, Food Processing Plants



Municipal

Roadways, Residential Streets, Shared Spaces



Specialty

Signage, Transportation, Rail, Refrigerated Display Lighting

Our Solutions



LED Lighting

Optimize utilities to end excess energy spending, promote safety and improve aesthetics



Controls, Sensors & IoT Solutions

Improve space utilization and increase productivity, and find actionable insights with IoT



Energy Management Systems

Establish more sustainable energy practices across an enterprise


Current

Industry-leading portfolio of innovative product and tech brands.



Current's HLI Brands portfolio of products represents lighting and control's most respected brands, ranging from architectural to complex spaces, outdoor to indoor, life safety, and more.

The HLI Brands portfolio provides customers innovative products with and a proven record of quality and results - a complete package ready to fulfill the needs of any spec.

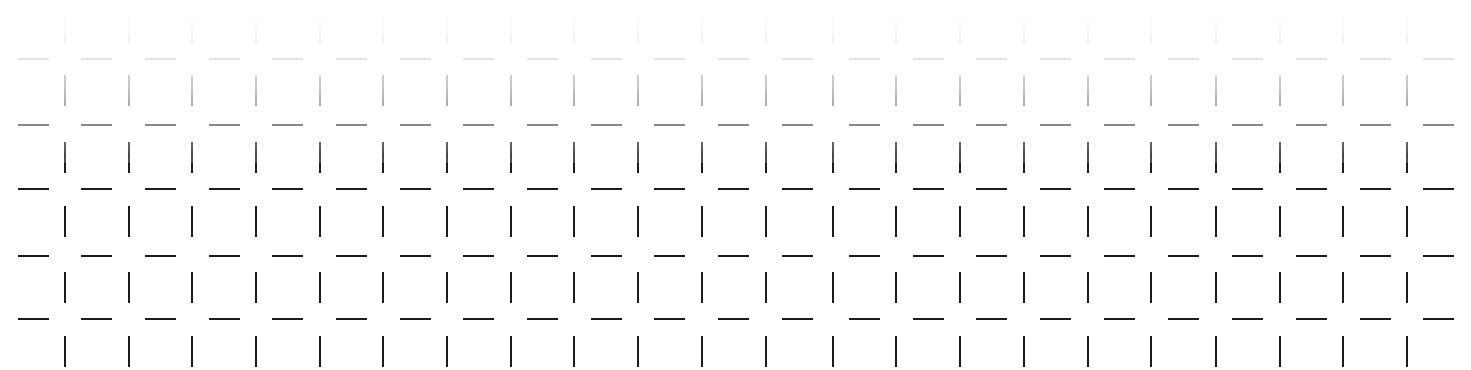

Current 

Current - HLI Brands

701 Millennium Blvd.
Greenville, SC 29607

[currentlighting.com/exo](https://www.currentlighting.com/exo)

© 2026 Current Lighting Holdco, Inc. All rights reserved.

(Rev 06/23/26)

COM_EXO-Product-Portfolio_brochure_R03
