
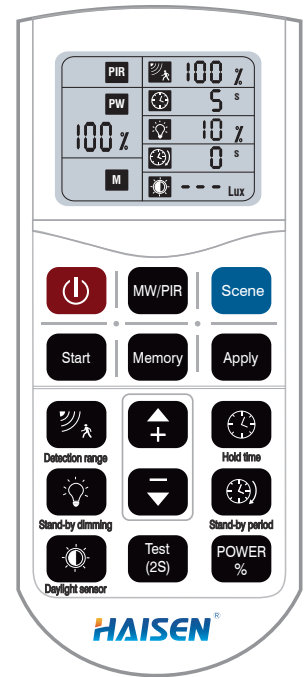


# HD05R

REMOTE CONTROL

## HD05R Remote Control Keys Function Introduction

Remote Keys	Keys Function	Keys Introduction
	<b>ON/OFF</b>	Switch ON/OFF the light; Switch OFF the sensor function.
	<b>MW/PIR</b>	Mode Switch
	<b>Reset</b>	Switch to Sensor mode and recover all settings to be factory defaulted setting (Detection area-100%, Hold time-5s, Daylight- Disable, Standby Period-0s, Stand-by dimming level-10%.
	<b>Start</b>	Press the key to start the setting of parameters with memory and apply function under the sensor mode. 1. Press "Start", there will be a letter "S" flashes in the lower left corner of the display, then start to set up all parameters; 2. After setting all parameters, press "Memory" to store the settings and keep it until the next reset; 3. Press "Apply" to the set sensor with stored settings within the remote IR range ; 4. Note: All data shown in the display are the settings after pressing "Memory".
	<b>Memory</b>	
	<b>Apply</b>	
	<b>Detection area</b>	
	<b>Hold time</b>	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+"/"-" to select the hold time. HD06VCRH 7B2:5s/30s/1min/3min/5min/10min/20min/30min in HD015VCRH:5s/30s/1min/3min/5min/10min/20min/30min HB001 VCR 1:10s/1min/5min/10min HB002VCR:5s/30s/1min/3min/5min/10min/20min/30min
	<b>Daylight Threshold</b>	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+"/"-" to select the daylight threshold.
	<b>Stand-by period</b>	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+"/"-" to select the low brightness time. HD06VCRH 7B2:0s/10s/30s/1min/5min/10min/30min/60min/+∞ HD015VCRH:0s/10s/30s/1min/5min/10min/30min/+∞ HB001 VCR 1:1min/30min/60min/+∞ HB002VCR:0s/10s/30s/1min/5min/10min/30min/60min/+∞
	<b>Stand-by dimming level</b>	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+"/"-" to select the low brightness during stand-by period.
	<b>UP</b>	After pressing different parameter keys, press either of the key to adjust (UP/DOWN) the required parameters.
	<b>DOWN</b>	
	<b>POWER</b>	Under sensor mode, press "POWER", the letter of "PW" flashes in the middle left of the display, press "+"/"-" to increase/decrease the output power.
	<b>Test mode</b>	Press the key to enter the test mode under sensor mode. It won't be memorized after power OFF. The parameters under test mode is: detection area-100%, hold time-2s, daylight-disable, stand-by period-0s, stand-by dimming level-10%.



Notes: Press "Scene" to reset the remote before using.

During the setting of each parameter, the icon will flash for 5s, after that, the setting will be kept automatically.