


Evolve[®]

Street & Roadway

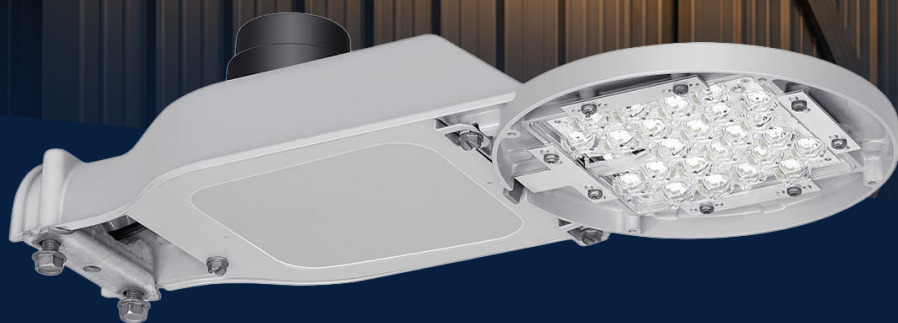


LED Security Luminaire

E2SD

Current 

LED Security Luminiare

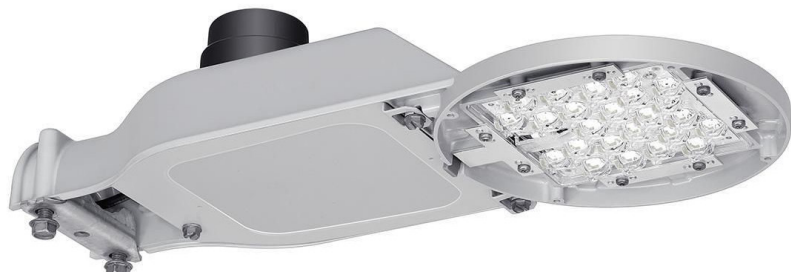

EVOLVE E2SD LED Security luminiare utilizes precise LED optical design and directional lens placement to maximize light delivery where it is needed.



- Uses up to 50% less energy of an equivalent HID luminiare
- Saves energy and reduces annual maintenance costs
- Up to 10,500K lumens
- Type III Medium, Type V and Type V Wide distributions
- Offered in 2700K, 3000K and 4000K CCTs
- Replaces up to 100W HPS

Applications



- Industrial work yards
- Suburban developments
- Rural areas
- Small parking lots
- Storage facilities

Performance

Lumens	3,270 - 10,500
Distribution	Type III Medium, Type V, Type V Wide
Efficacy	(LPW): 137 - 169
CCT	(K): 2700, 3000, 4000
CRI (Min)	70
Legacy Equivalency	50-100W HPS (High Pressure Sodium)

HPS	LUMENS	LED
50W	3,600	25W
70W	5,350	31W
100W	8,550	68W



House Side Shields Options



ELSX/E2SD – 2.5in/120 degree

PRODUCT CODE	DESCRIPTION
93319588	ELSX-E2SD-25120-BLCK
93319589	ELSX-E2SD-25120-GRAY

ELSX/E2SD – 5.0in/120 degree

PRODUCT CODE	DESCRIPTION
93319590	ELSX-E2SD-50120-BLCK
93319591	ELSX-E2SD-50120-GRAY

ELSX/E2SD – 2.5in/180 degree

PRODUCT CODE	DESCRIPTION
93319592	ELSX-E2SD-25180-BLCK
93319593	ELSX-E2SD-25180- GRAY

ELSX/E2SD – 5.0in/180 degree

PRODUCT CODE	DESCRIPTION
93319594	ELSX-E2SD-50180-BLCK
93319595	ELSX-E2SD-50180-GRAY



Current - GLI Brands

25825 Science Park
Beachwood, OH 44122

LED.com

© 2024 Current Lighting Solutions, LLC. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev 06/05/26)
OLP3262
