

BOLLARD

tradeSELECT®



SLING BOLLARD

ROUND/SQUARE

- Commercial grade LED Bollard for use in outdoor applications such as a commercial building, retail, government and educational facilities
- CCT switchable: 3000K, 4000K or 5000K
- Wattage switchable: 12W, 16W or 22W
- 6" Round or 6" Square with Dark Bronze finish



IP65




ROUND



SWITCHABLE FEATURE




Switchable from
12 to 22 watts,
CCT switchable
3K, 4K, 5K

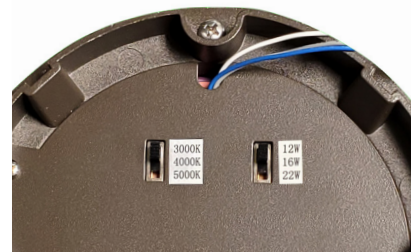


PHOTOMETRY

SGB-R-LSCS - 4K, 22W

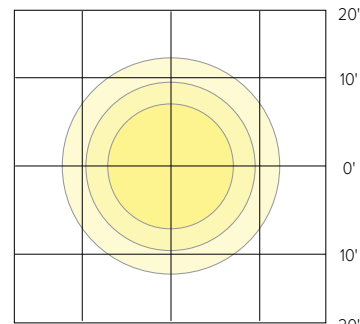

Height: 42"

DIMENSIONS

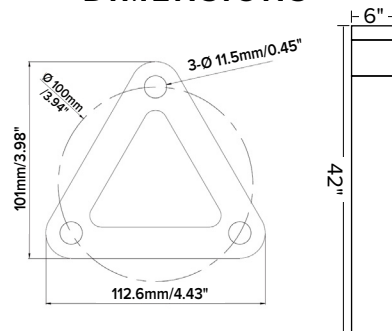


SQUARE



SWITCHABLE FEATURE




Switchable from
12 to 22 watts,
CCT switchable
3K, 4K, 5K

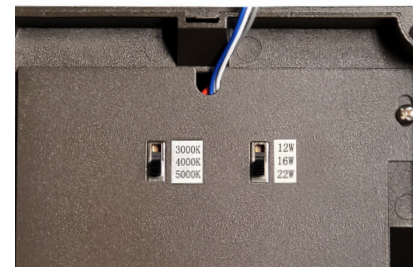


PHOTOMETRY

SGB-S-LSCS - 4K, 22W

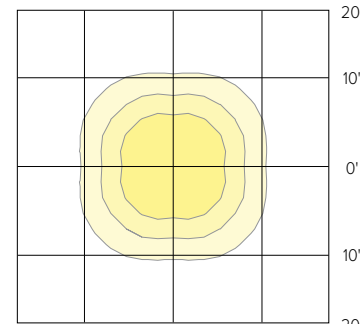

Height: 42"

DIMENSIONS

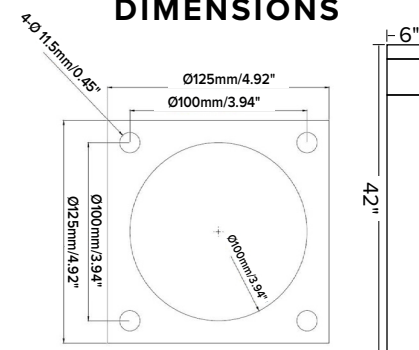

STOCK ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Wattage	CCT/CRI	Lumens	LPW	Finish
SGB-R-LSCS	Round	120-277V	12	3000K/80	1328	110.7	Dark Bronze
				4000K/80	1421	118.4	
				5000K/80	1462	120.8	
	Round	120-277V	16	3000K/80	1850	110.1	
				4000K/80	1980	117.9	
				5000K/80	2036	121.2	
	Round	120-277V	22	3000K/80	2383	106.9	
				4000K/80	2551	114.4	
				5000K/80	2624	117.7	
SGB-S-LSCS	Square	120-277V	12	3000K/80	1149	95.0	Dark Bronze
				4000K/80	1208	99.8	
				5000K/80	1244	102.8	
	Square	120-277V	16	3000K/80	1602	95.4	
				4000K/80	1712	101.9	
				5000K/80	1749	104.1	
	Square	120-277V	22	3000K/80	1980	88.8	
				4000K/80	2116	94.9	
				5000K/80	2161	96.9	

