LITECONTROL
making light work™

RYVL 55L

TRI-LENS
ARCHITECTURAL TROFFER

Current

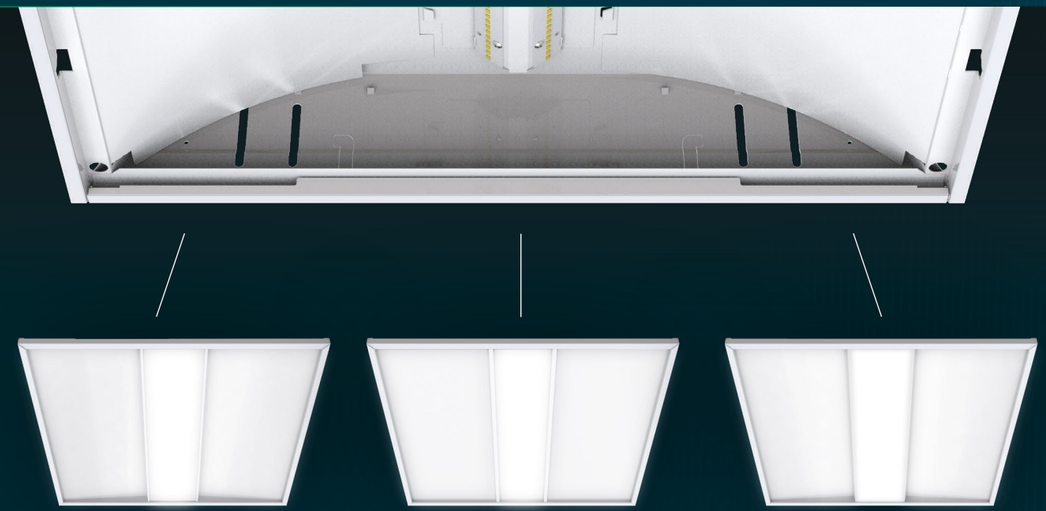

ASO Door

- Angled side diffusers
- Dropped center lens
- Extruded center rails

FHE Door

- Flat side diffusers
- Flat center lens
- Extruded center rails

AHE Door

- Angled side diffusers
- Dropped center lens
- Value oriented option

Performance-driven platform with three aesthetic options and sizes for visual flexibility.

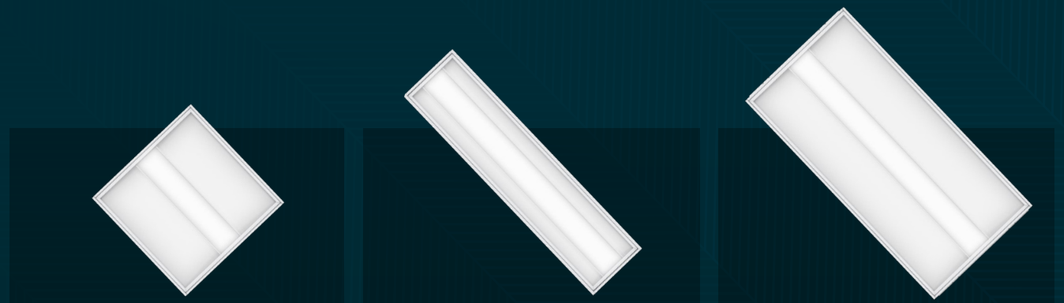

2x2

- 2500 - 8000 Lumen Range
- 127 Max Efficacy (ASO & FHE)
- 134 Max Efficacy (AHE)

1x4

- 2500 - 8000 Lumen Range
- 122 Max Efficacy (ASO & FHE)
- 130 Max Efficacy (AHE)

2x4

- 2500 - 8000 Lumen Range
- 145 Max Efficacy (ASO & FHE)
- 154 Max Efficacy (AHE)

RYVL	Competitors

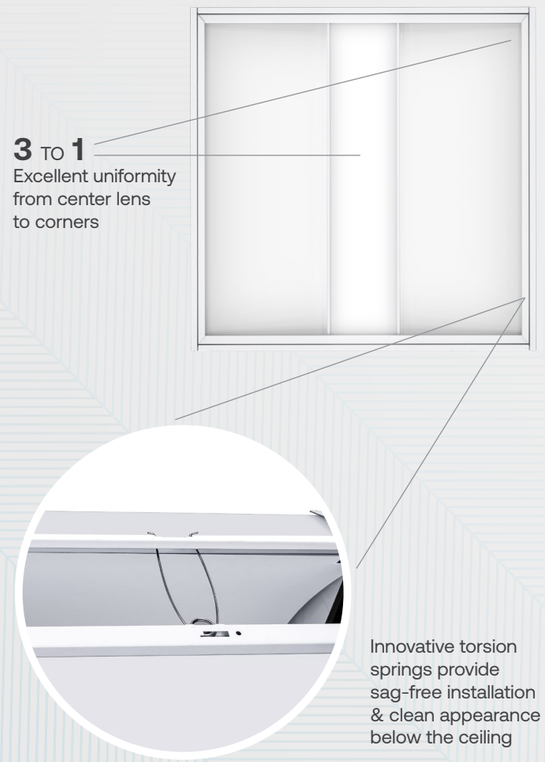

Innovative torsion springs provide sag-free installation & clean appearance below the ceiling

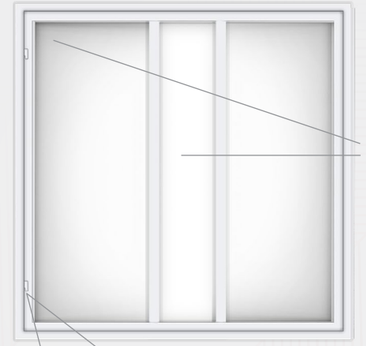

Other brands have visible clips on their doors

LIGHTING CONTROLS™

One Lighting Platform for a Connected World. The NX Lighting Controls platform delivers a seamless interior and exterior lighting control.

- NX Wired Dual RJ45 No Sensor
- NX Wired Dual RJ45 LMI Sensor
- NX Wireless Radio No Sensor
- NX Wireless LMI Sensor w/ BT
- BTSMP-LMI OCC and DLH w/BT

LITECONTROL
making light work™

Current

Current - HLI Brands
701 Millennium Blvd.
Greenville, SC 29607

currentlighting.com/litecontrol

© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Rev 11/09/22
LC_RYVL_Brochure_R01