

CFP

EDGE-LIT FLAT PANEL

NOTE: Components shown in images are representative only and may vary based on the configuration ordered.

CAUTION

Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

WARNING

If any special control devices are used with this luminaire, follow the instructions carefully to assure full compliance with NEC requirements. If there are any questions, contact a qualified electrical contractor.

WARNING

This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

WARNING

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


NOTE: Finished installation depth is 1.69" from the ceiling surface.

NOTE: The maximum load for CFPSMK14 is 6.00 lbs.
The maximum load for CFPSMK22 is 6.22 lbs.
The maximum load for CFPSMK24 is 11.11 lbs.

LUMINAIRE FITTING


STEP 1

Snap corner bracket to extruded rails, making sure that mounting flanges are on opposite sides.

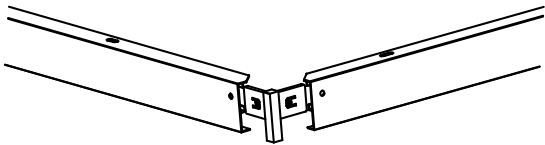


STEP 2

Attach frame to ceiling structure.

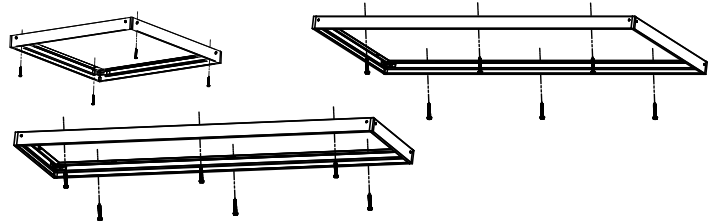

STEP 3

Remove one non-mounting frame side and slide in flat-panel. Make all electrical connections using appropriate fittings.

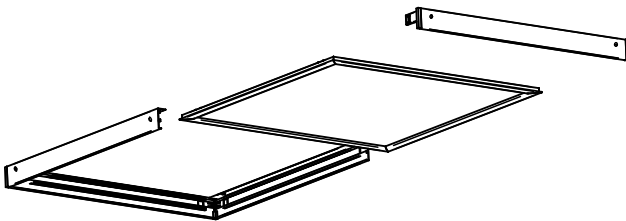

STEP 4

Reinstall frame side to complete.

