



Decaux
Cylinders



Decaux Cylinders
provide excellent performance and versatility for general illumination while adding an aesthetically pleasing architectural element to the space. Ideal for a wide variety of commercial, retail and institutional applications.

Features

- 6" and 8" Heavy Gauge Cylinders
- 1000 to 2400 Nominal Lumens
- Wide Flood Distribution
- Diffuse Acrylic Lens
- CCT: 30/35/40/50K, 90 CRI
- 120-277V with dimming to 1% (0-10V or Lutron EcoSystem)



Surface



Pendant



Wall




2H**




1H**

Mounting Options

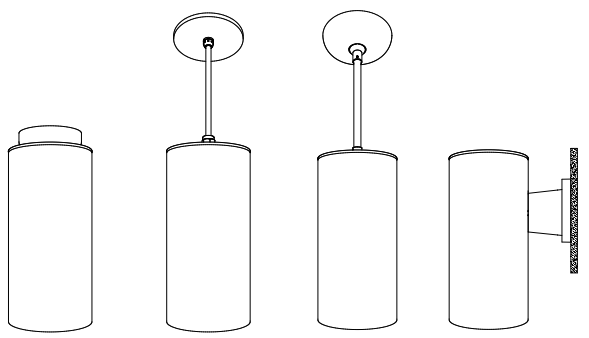

Surface Cord Pendant Wall

Cylinder Colors

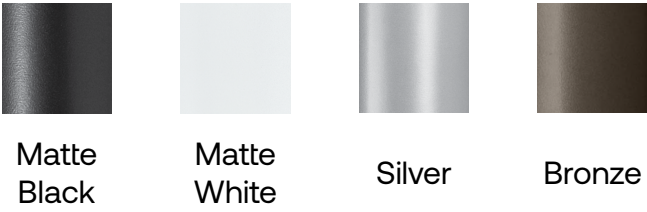

Dimensions

Model	Diameter	Height
LCC6 (1000-1800 lm)	6.0"	12.25"
LCC6 (2400 lm**)	6.0"	15.25"
LCC8 (All)	8.13"	16.25"

** Vented Cylinder Body (1H or 2H) required





ALBEO

ARIZE

DAINTREE WIRELESS CONTROLS

EVOLVE

GE LAMPS

GTX

IMMERSION

LIGHTGRID

LIGHTSWEEP

LUMINATION

TETRA

Current - GLI Brands

25825 Science Park STE 400
Beachwood, OH 44122-7392

[LED.com/Lumination](https://www.led.com/lumination)

© 2023 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev 09/26/23)

LUM_LCC_B_R01

