



**JUNCTION BOX - JBR30 Installation Instructions**


**⚠ WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Portable spear or tree mounts using a cord and plug must be plugged into a receptacle protected by a Ground Fault Circuit Interrupter (GFCI) in accordance with the National Electrical Code. Failure to take these steps may result in serious personal injury. All electrical work should be done by a qualified electrician.**

**KEEP THIS SHEET FOR FUTURE REFERENCE.**

- Tools Required:**
- Flat Blade Screwdriver
  - RTVSealant
  - 3/16" Hex Wrench
  - 7/16" Open End or Socket
  - Thread Sealant

**JBR30 INSTALLATION INSTRUCTIONS:**

**⚠** Make certain the electrical supply is **OFF** before installing equipment.

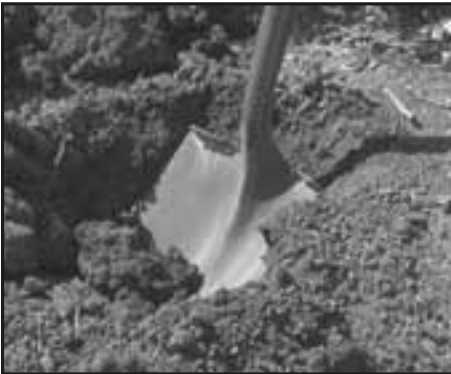


1. Dig a hole large enough to accommodate junction box with stakes.



2. Connect junction box to conduit system. Attach stakes (2) to side of junction box with screws provided. Thread sealant must be used to prevent water entry.



3. Bring wires through and seal conduit entries inside junction box with good grade RTV sealant following sealant manufacturers instructions.

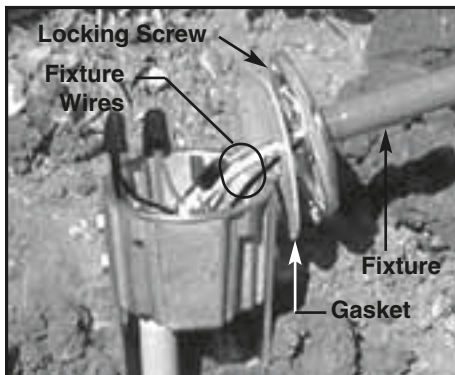

4. Attach fixture to junction box cover, seal threads. Plan for fixture orientation and tighten locking screw on bottom of cover. Connect wires observing polarity, i.e., green-to-ground, white-to-common, & black-to-voltage. Wrap connections with dielectric compound (provided) to seal. Attach gasket and cover.



5. Fill hole with soil, concrete, or other permanent media to secure and support lighting fixture. Take into consideration the weight and height of the fixture and also the soil condition.



6. Junction box cover must be slightly above grade level.



# JUNCTION BOX - JBR30 Installation Instructions

## KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

**⚠ General Product Limited Warranty Coverage:** All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

**⚠ Auxiliary Equipment:** All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the components manufacturer's warranty.

**⚠ Copper, Bronze and Brass Landscape Components:** Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 25 years from date of sale.

Kim Lighting's brass components are constructed from several brass parts that are manufactured by various methods at various times. Since brass naturally deepens in color as it ages through the normal oxidation process, these parts may exhibit subtle differences in coloration when the product is new. This is normal and expected. These color differences will be eliminated shortly after installation through the normal brass oxidation process.

**⚠ Composite In-Grade Components:** Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

**⚠ Aluminum Landscape Components:** Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

**⚠ Limit of Liability and General Conditions:** Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed, or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.

How may we serve you better?  
 Please let us know. Visit our website at:  
[currentlighting.com/kimlighting](http://currentlighting.com/kimlighting)  
 Your concerns are important to us.