



Scarab™ - EL731 / C736 L.E.D. Accent Series Installation Instructions

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS

IMPORTANT SAFETY INSTRUCTIONS!

⚠ WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Portable spear or tree mounts using a cord and plug, must be plugged into a receptacle protected by a Ground Fault Circuit Interrupter (GFCI) in accordance with the National Electrical Code. Failure to take these steps may result in serious personal injury. **DO NOT** operate luminaire with missing or damaged lens.

MAINTENANCE: To maintain light efficiency and prevent fixture overheating, lenses must be kept clean and free of dirt, dust, leaves, trash and mineral deposits from water. For optimum performance a regularly scheduled maintenance program should be followed. Lighted lamp is **HOT!** Do not touch hot lens, guard or enclosure.

KEEP THIS SHEET FOR FUTURE REFERENCE.

Your KIM fixture is supplied with 1/2" NPSM male mounting threads. It may be installed so that fixture is aimed up or down (see step 4 below).

Tools Required: 1/8" Allen Wrench
 Thread Sealant

Phillips Head Screwdriver
 Silicone Grease

Flat Blade Screwdriver

INSTALLATION INSTRUCTIONS:


⚠ Make certain electrical supply is **OFF** before starting installation.




1. Coat threads with a good sealant.



2. Install fixture onto mounting device.

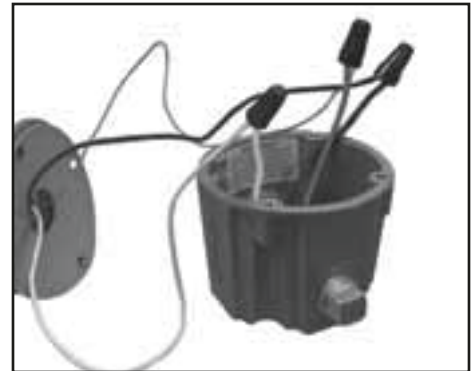

3. Attach fixture leads observing polarity; i.e.; braided bare copper wire-to-ground, white-to-common, and black-to-voltage.

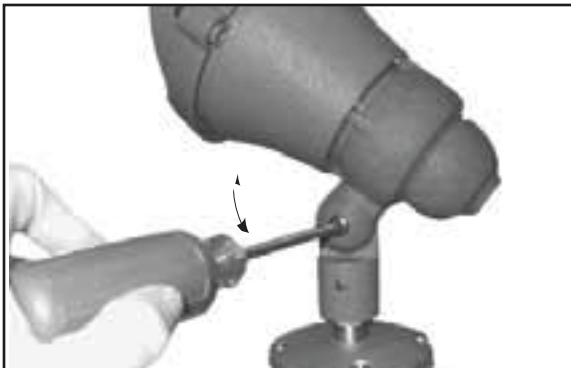


4. Loosen screw, adjust fixture angle, and tighten screw.



5. Loosen set screw, adjust fixture rotation, and tighten set screw.


Scarab™ L.E.D.- EL731 / C736 Accent Series Installation Instructions

LAMP REPLACEMENT INSTRUCTIONS :

 Make certain electrical supply is **OFF** before starting replacement.



1. Remove shield and lens.

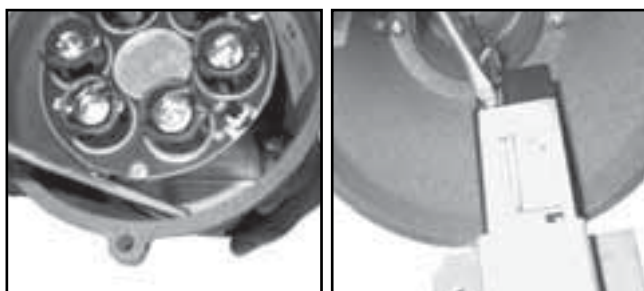

2. Remove the LED/ballast assembly using a phillips screwdriver to take ballast cover off. Using a small flat blade screwdriver remove connections on ballast assembly.



3. Replace with new 6 Emitters LED ballast assembly.



4. Coat shield screw threads with silicone grease. Install shield and lens with short side down to drain water. Tighten screws progressively.

KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

Auxiliary Equipment

All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

Copper, Bronze and Brass Landscape Components

Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 25 years from date of sale.

Kim Lighting's brass components are constructed from several brass parts that are manufactured by various methods at various times. Since brass naturally deepens in color as it ages through the normal oxidation process, these parts may exhibit subtle differences in coloration when the product is new. This is normal and expected. These color differences will be eliminated shortly after installation through the normal brass oxidation process.

Composite In-Ground Components

Composite In-Ground fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.



LAMP INFORMATION		
Cat. No.	Lamp Type	Max Watts
EL731/C736	6 Emitters LED	6

How may we serve you better?
Please let us know. Visit our website at:
www.kimlighting.com
Your concerns matter to us.