

HA13S - S-Shaped Down Cast Arm Wall Mount Installation Instructions

⚠ WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.


MAINTENANCE: A regularly scheduled maintenance program must be established to insure paint coating is intact, corrosion or structural damage has not occurred, and all mounting arms, rods, nuts and bolts are tight. Failure to do so could lead to danger or serious personal injury.

CAUTION: Structural integrity of mounting plate attachment to wall is by others.


NOTE: All electrical work must be done by a qualified electrician. **KEEP THIS SHEET FOR FUTURE REFERENCE.**

- Tools Required:**
- ☐ Flat Head Screwdriver
 - ☐ Torque Wrench
 - ☐ 3/16" Hex Wrench
 - ☐ Sealant
 - NS / SRS ☐ 9/16" 6- or 12- Point Deep (2" min.) Socket
 - LE19: ☐ 12" (min.) Long Socket Extension
 - LE26:


⚠ Make certain electrical supply is **OFF** before starting installation.

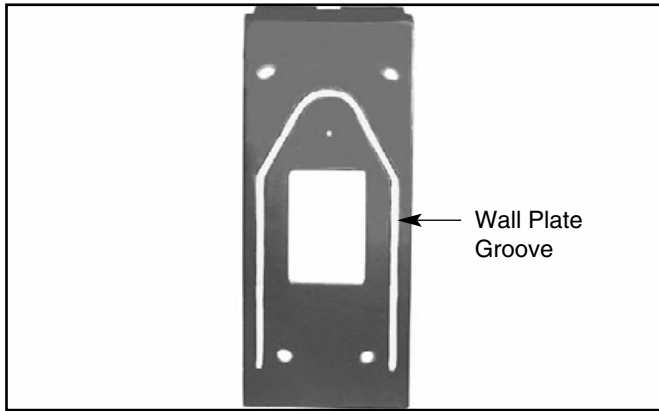


1. Remove wiring inspection cover from wall plate and wall mount cover plate. Adhere rope caulk in a continuous strip into the wall plate groove. Allow caulk to extend well above the wall plate surface to ensure a proper seal.

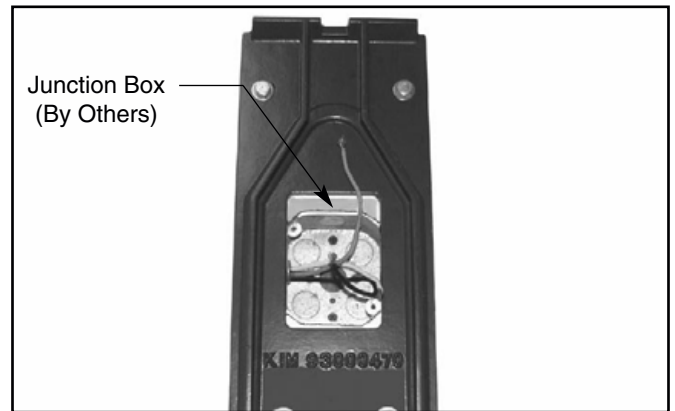


2. Securely mount wall plate over junction box (by others) on wall. **CAUTION: Structural integrity of mounting plate attachment to wall is by others.**

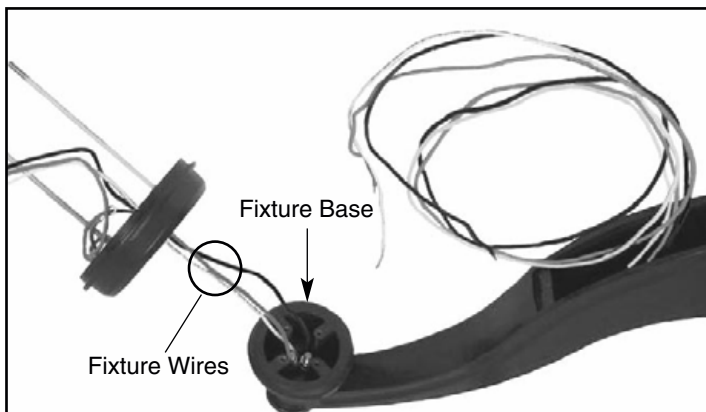


3. Attach fixture base to S-Shaped Down Cast Arm using four (4) socket head cap screws. Tighten securely. **IMPORTANT! Keep wires tight when attaching fixture to down cast arm to avoid pinching wires.** (See fixture installation instructions for fixture attachment.)

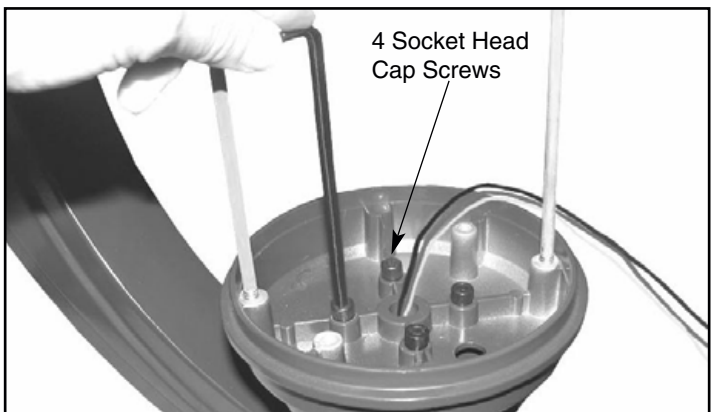


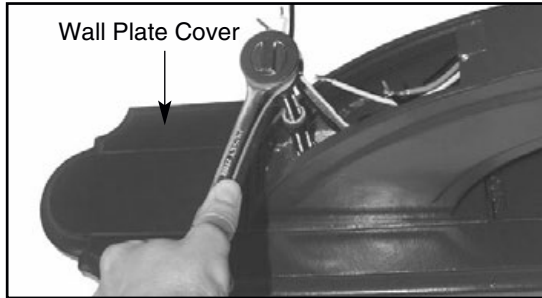


4. Attach arm to wall mount plate cover using two (2) $\frac{5}{16}$ -18 x $1\frac{1}{4}$ " hex head cap screws (supplied).

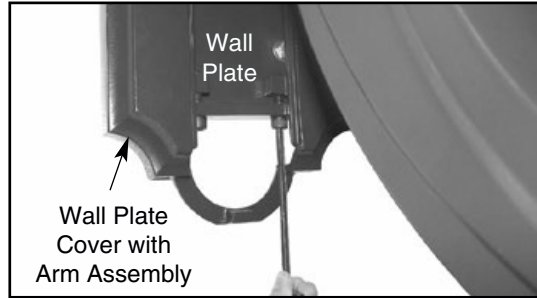

5. Attach wall plate cover assembly to wall plate. Secure with two (2) socket head cap screws. Connect fixture wires to supply wires observing polarity, i.e.; green-to-ground, white-to-common, and black-to-voltage.

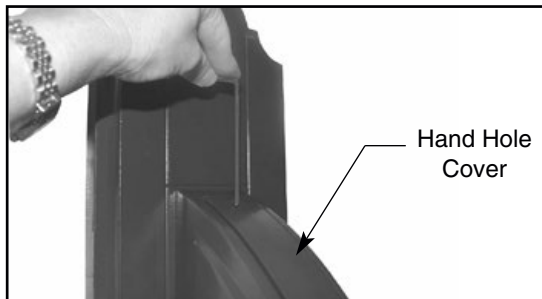

6. Install hand hole cover using two (2) 10-32 x $\frac{1}{2}$ " flat head stainless steel socket screw.

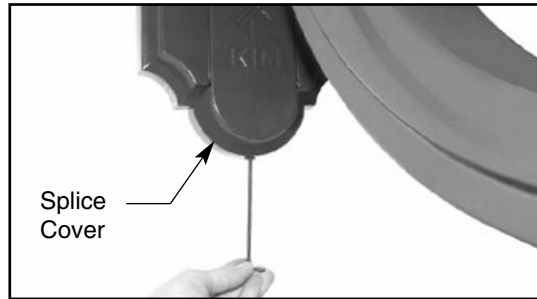

7. Attach splice cover using the 10-32 flat head stainless steel socket screw. Follow fixture installation instructions for fixture attachment.

For warranty see: currentlighting.com/kimlighting