

HA14 - Neo-Classic Arm Wall Mount Installation Instructions



WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.

MAINTENANCE: A regularly scheduled maintenance program must be established to insure paint coating is intact, corrosion or structural damage has not occurred, and all mounting arms, rods, nuts and bolts are tight. Failure to do so could lead to danger or serious personal injury.


CAUTION: Structural integrity of mounting plate attachment to wall is by others.

NOTE: All electrical work must be done by a qualified electrician. **KEEP THIS SHEET FOR FUTURE REFERENCE.**

- Tools Required:**
- Flat Head Screwdriver
 - Torque Wrench
 - 1/8" Hex Wrench
 - 3/32" Hex Wrench
 - 5/32" Hex Wrench
 - Sealant
- HA14S, RA17, AE17, BE17, LE19:** 9/16" 6- or 12- Point Deep (2" min.) Socket
- HA14L, RA25, AE21, BE21, LE26:** 3/4" 6- or 12- Point Deep (2" min.) Socket
- 12" (min.) Long Socket Extension
- 20" (min.) Long Socket Extension





Make certain electrical supply is **OFF** before starting installation.

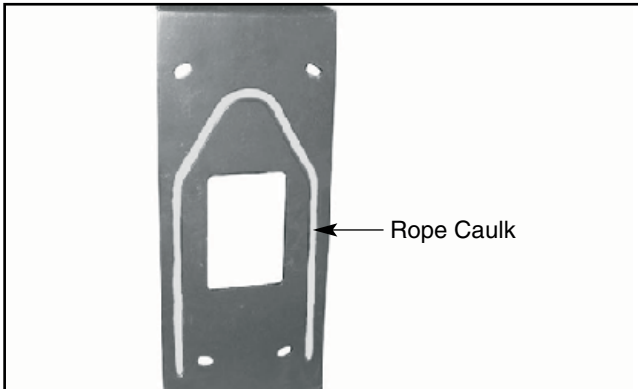


1. Remove wiring inspection cover from wall mount cover and wall mount cover plate. Adhere rope caulk in a continuous strip into the wall plate groove. Allow caulk to extend well above the wall plate surface to ensure a proper seal.


2. Securely mount wall plate over junction box on wall.
CAUTION: Structural integrity of mounting plate attachment to wall is by others.

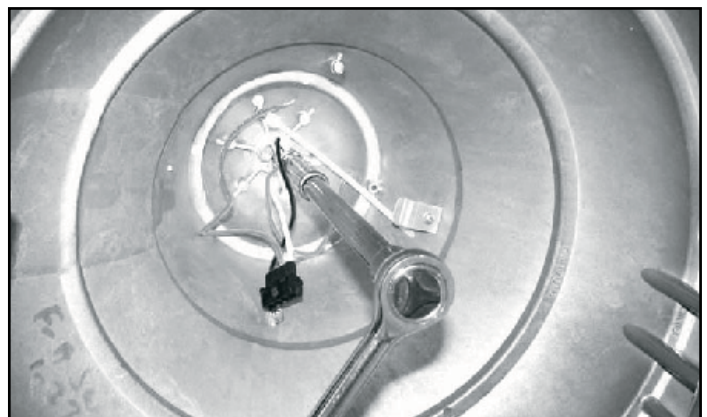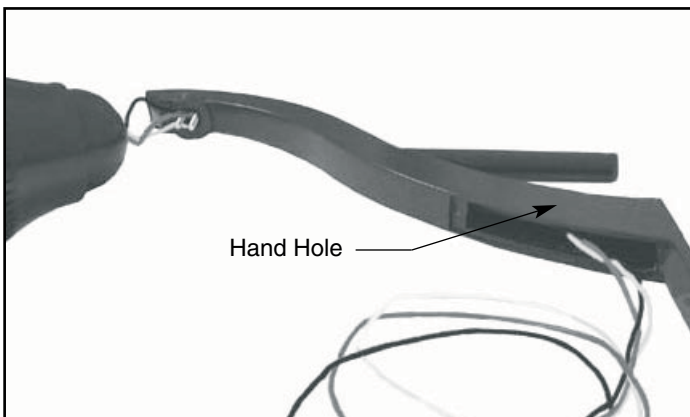


3. Install fixture head onto neo-classic arm. **IMPORTANT!** Keep wires tight when attaching fixture to neo-classic arm to avoid pinching wires.

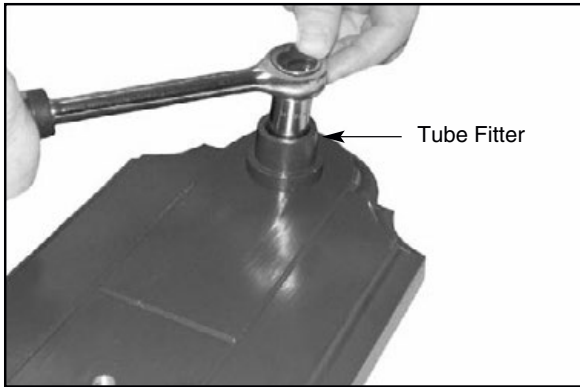


4. Install tube fitter to wall mount.

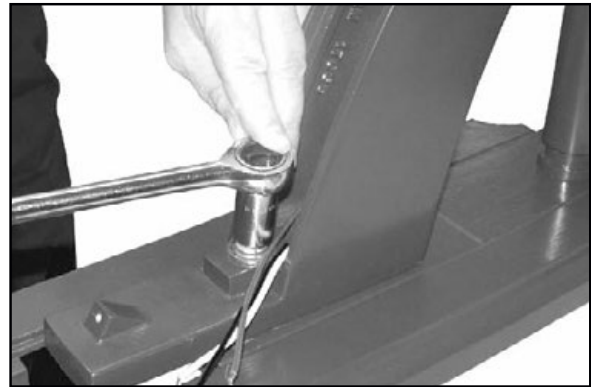

5. Attach neo-classic arm with fixture head, to wall mount cover plate. Tighten to 20 ft.-lbs.

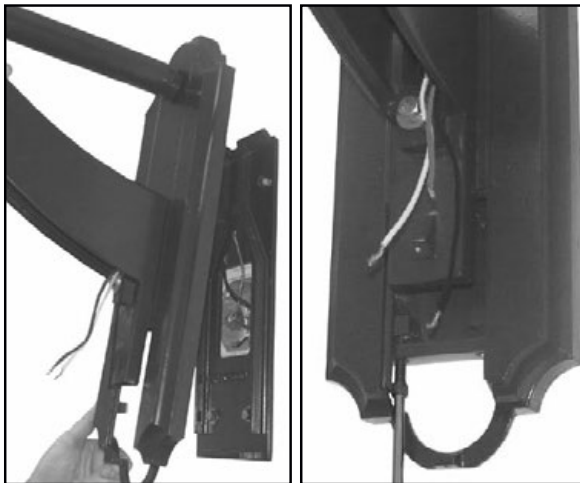

6. Attach wall mount cover plate with arm and fixture head attached, to wall plate with two (2) $\frac{5}{16}$ -18 x 1 $\frac{1}{4}$ " socket head cap screws. Connect fixture wires to supply wires observing polarity, i.e.; green-to-ground, white-to-common, and black-to-voltage. (See fixture installation instructions.)

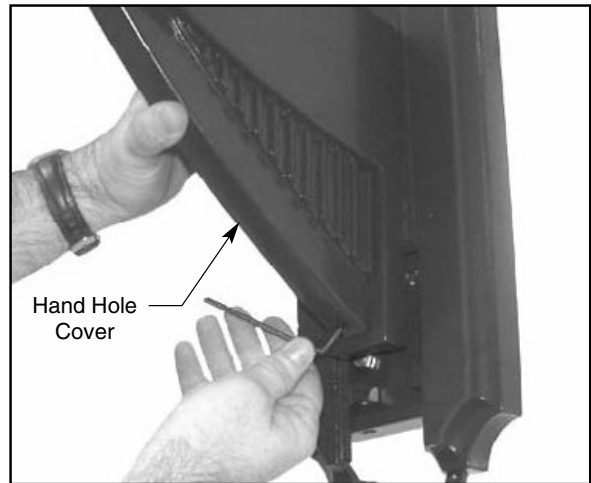

7. Install hand hole cover using two (2) 10-32 x $\frac{1}{2}$ " flat head stainless steel socket screws.



8. Attach splice cover using the 10-32 flat head socket stainless steel screw.

For warranty see: currentlighting.com/kimlighting