

HA12 - Side Pole S-Shaped Up Cast Arm Installation Instructions

⚠ WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.

MAINTENANCE: A regularly scheduled maintenance program must be established to insure paint coating is intact, corrosion or structural damage has not occurred, and all mounting rods, nuts and bolts are tight. Failure to do so could lead to damage or serious personal injury.

NOTE: All electrical work must be done by a qualified electrician. KEEP THIS SHEET FOR FUTURE REFERENCE.


Tools Required: Flat Head Screwdriver Torque Wrench 1/8" Hex Wrench 3/16" Hex Wrench
 3/32" Hex Wrench

For HA12S, RA17, AE17, BE17 9/16" 6- or 12- Point Deep (2" min.) Socket 12" (min.) Long Socket Extension


For HA12L, RA25, AE21, BE21 3/4" 6- or 12- Point Deep (2" min.) Socket 20" (min.) Long Socket Extension

⚠ Make certain electrical supply is **OFF** before starting fixture installation.


IMPORTANT! Protect pole and all painted parts with padded surfaces during assembly.

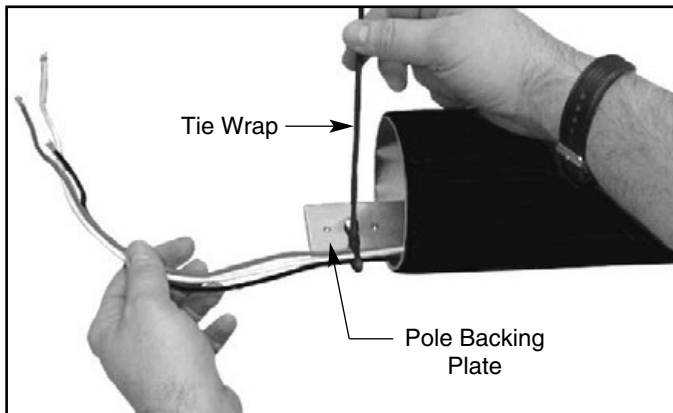

1. Lay pole horizontal on padded supports to protect finish. Pull wires through pole & out the top. Tie-wrap wires to pole backing plate. Tie wires in a knot or back loop through tie-wrap. Wire leads need to extend 12" beyond the handhole.

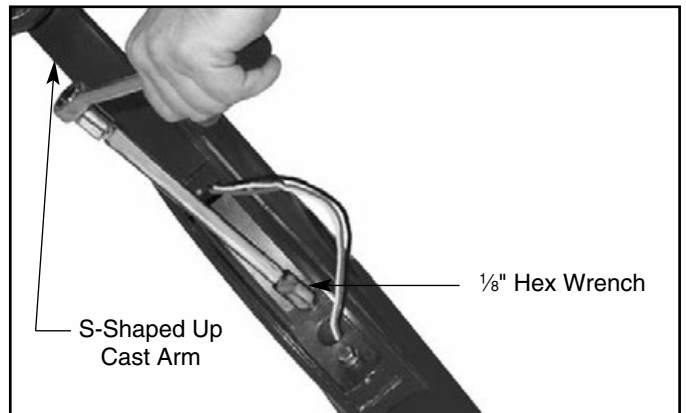


2. Attach up cast arm to pole with bolts, tighten to 20 ft.-lbs. All mounting hardware is supplied by Kim Lighting.

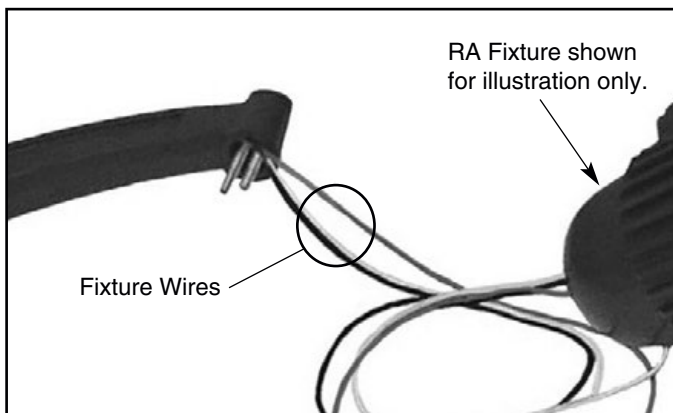


3. Thread fixture wires through S-Shaped Up Cast Arm and out arm access cover. **Important: Keep wires tight when attaching fixture to arm to avoid pinching wires.**



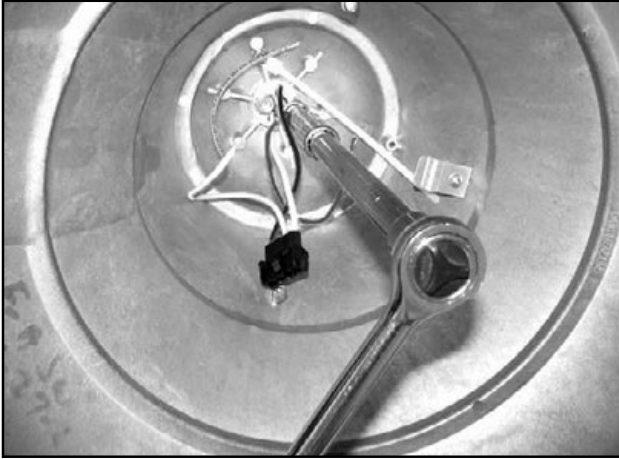

4. Install fixture head to side pole up swept cast arm with washers & nuts, tighten to 20 ft.-lbs.
IMPORTANT NOTE: Orient "hinge" side of fixture towards pole.

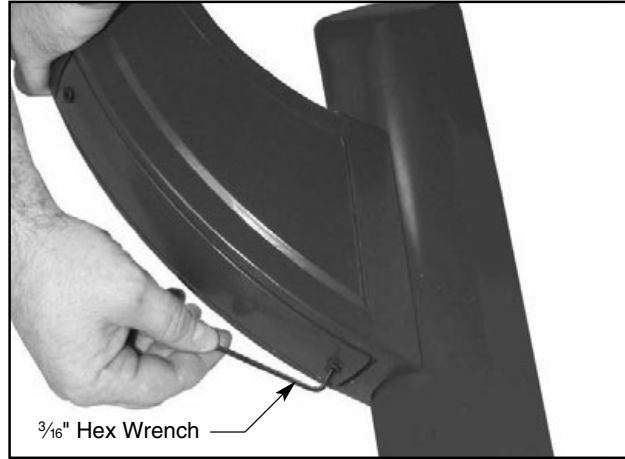

5. Push wires into pole and out pole handhole. Secure wire with the cable tie provided. Install arm access cover and secure with screws.

For warranty see: currentlighting.com/kimlighting