


PRELUDE SERIES

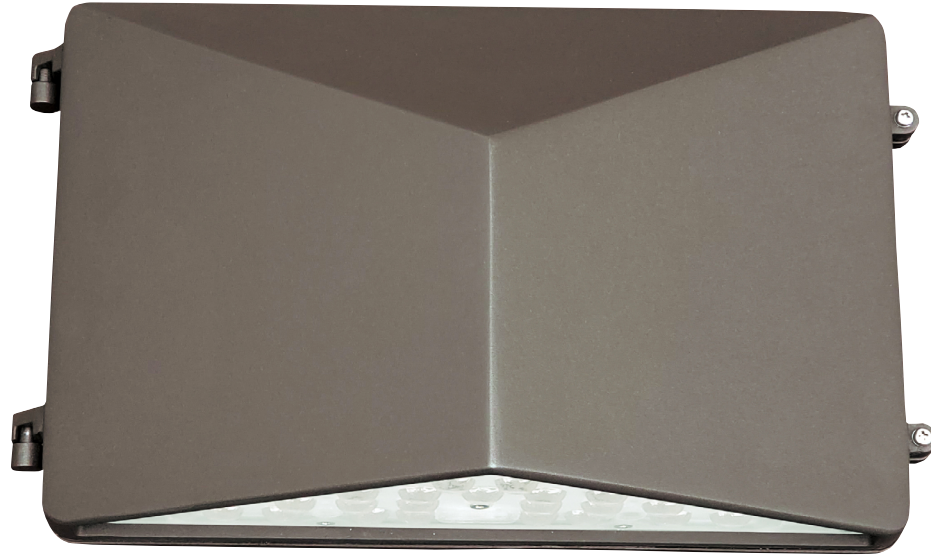

PRL-C-LS

The Prelude Wallpack luminaires offers an architectural contemporary form with maximum flexibility. This luminaire features field selectable Wattages from 18 to 60 Watts capable of replacing up to 250W traditional HID wall packs. Cutoff configuration is perfect for applications requiring no up-light.

Features and Benefits:

- Field Selectable Wattages from 18 to 60 Watts
- Lumen Range from 2500-8600 lumens
- Efficacy up to 144 LPW
- Type III Distribution for Full Cut Off configuration, (PRL-C) for applications requiring no up-light
- IP65 and certified to UL 1598 for use in wet locations
- Certified up to 40°C ambient per UL 1598




Integral dial can be accessed by opening the front housing of the product. Six wattage options are available in each housing style.



Performance Data

Series Number	Mounting	CRI/CCT	Distribution Type	Lumens Delivered	Voltage	System Watts	Lumens Per Watt
PRL-C-LS-4K	Wall	70/4000K	Type III	2537-8460	120V-277V	18-60 Watts	139-141


Performance

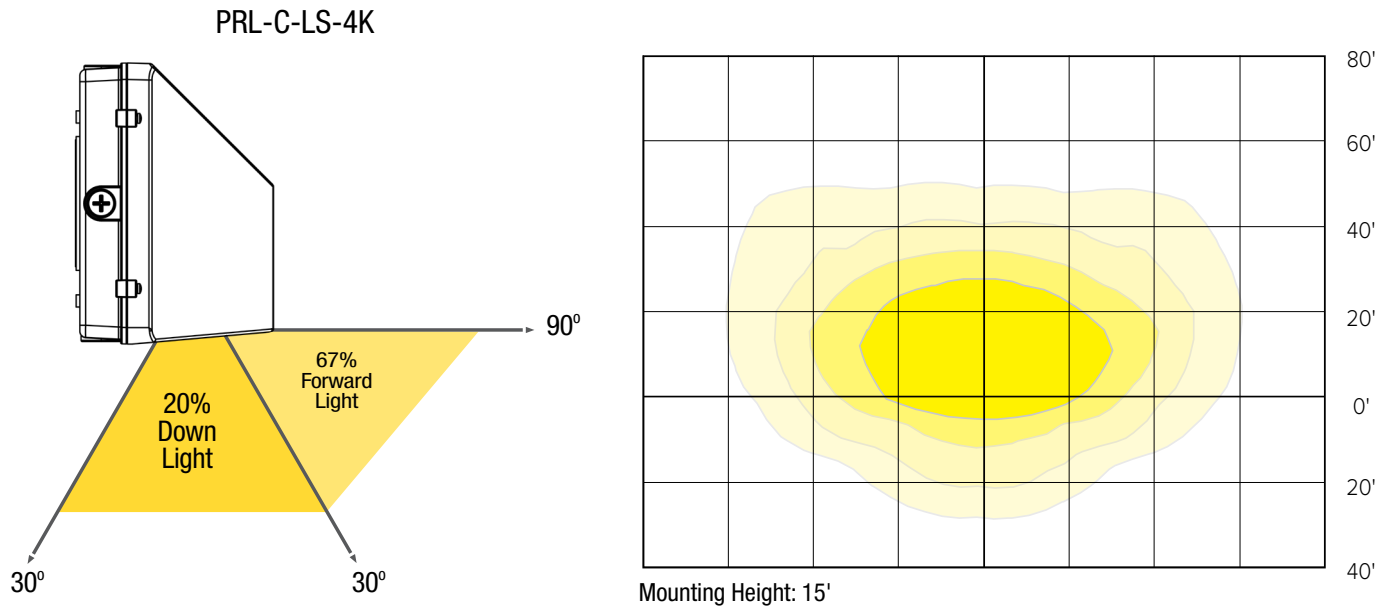

Dimensions

PRL-C-LS-4K

Glass Refractor Wallpack

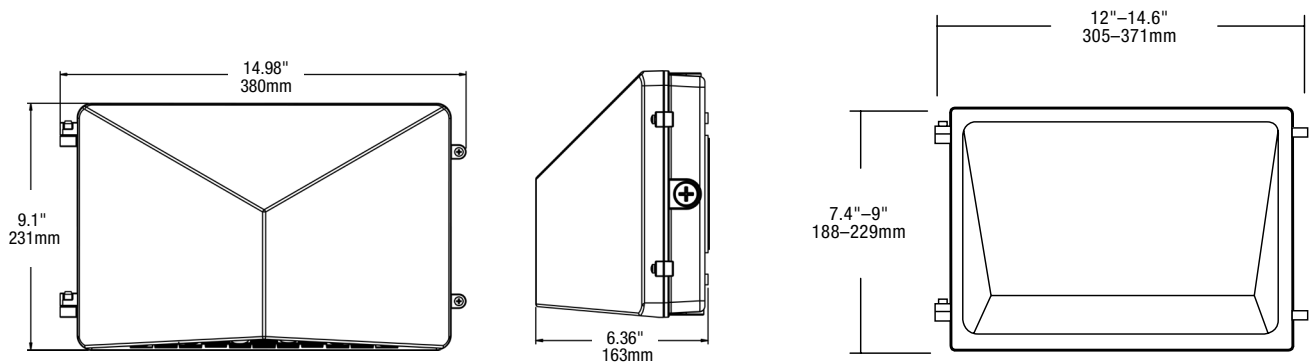

The Architectural form of the Prelude Wallpacks allow for complete coverage of legacy glass refractor wallpacks. The sizing range shown above represents the sizing of the Exo WGH product as well as most major competitive products.