





SIMPLE. AFFORDABLE. EFFICIENT.

Litecontrol's SAE Program provides a Simple, Affordable & Efficient Process and Product Selection.

The portfolio of product is economically designed and priced for competitive positioning in a variety of applications. The SAE Program is service centric with unique program attributes, including ease of specifying and ordering.

Simple

- Straightforwardness of selection, process and installation
- Focused on key features for precision application

Affordable

- Simplicity of design
- Competitively priced

Efficient

- DesignLights Consortium™ (DLC®) qualification on select products
- Vi Technology on select products



Variable Intensity Technology

Vi Story

Variable Intensity Technology is a simple method for specification of luminaire lumens and wattage to meet the exacting demands of each project. Vi Technology provides verifiable wattage for compliance with programs, agencies and state and local codes.



SpectraSync™ is an easy and intuitive white tuning solution offered in two modes to accommodate a variety of applications.

Dim to Warm



Dim to Warm mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed. (Available with 2200K-3000K)

Tunable White




Tunable White offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors, or the aesthetics of the space. (Available with 2700K-5000K or 2700K-6500K)

TABLE OF CONTENTS

SAE 100 - Linear	100	4	SAE101	Pendant/Wall Indirect/Direct
		6	SAE102	Pendant/Wall Indirect/Direct
		8	SAE103	Pendant Indirect/Direct
		10	SAE104	Pendant/Wall Indirect/Direct
		12	SAE105	Pendant Indirect
		14	SAE106	Pendant Indirect/Direct
SAE 200 - Perimeter	200	16	SAE201	Adjustable Concealed Cove
		18	SAE202	Wall/Slot
SAE 300 - Recessed	300	20	SAE301	Troffer



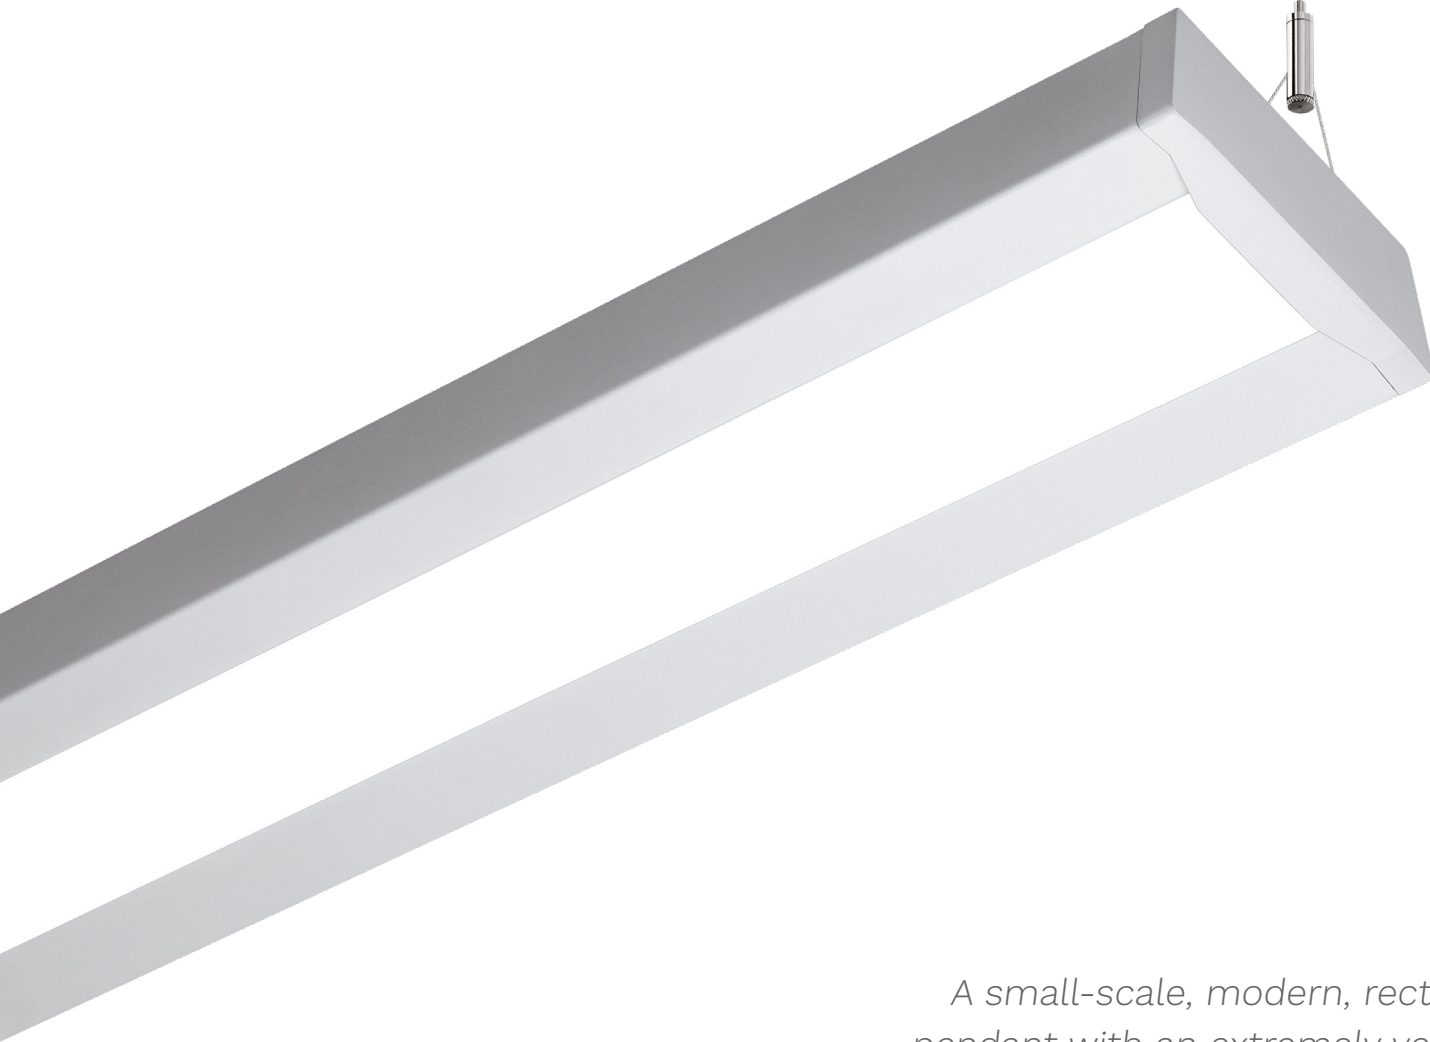

A small-scale, modern, rectilinear pendant with an extremely versatile performance package.

KEY FEATURES


- Vi Technology for specifiable output/wattage
- SpectraSync™ Color Tuning Technology
- Continuous lens with flanged end casting to eliminate light leaks
- Pendant or Wall Mount
- Maximum color variation of 2 SDCM
- Separately controlled direct & indirect distribution
- Interlocking feature for row joining to eliminate light leak and facilitate ease of installation
- Controls compatible for integral daylight or occupancy sensors

Feature	Code	Options	Description
Program		SAE	SAE Program
Series		101	101
Mounting		P	Pendant
Fixture Distribution		ID	Indirect/Direct
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		02	2, 610mm
		03	3, 914mm
		04	4, 1219mm
		06	6, 1829mm
		08	8, 2438mm
Distribution Diffuser		SOF	Soft Diffuse Lens
Finish/Color		C1	Matte White (Default)
		CC	Custom Color* *see specification sheet for details
Color Temperature		27K	2700K
		30K	3000K
		35K	3500K
		40K	4000K
		50K	5000K+
		27K9	2700K, 90 CRI
		30K9	3000K, 90 CRI
		35K9	3500K, 90 CRI
		40K9	4000K, 90 CRI
		50K9	5000K, 90 CRI+
		2230TD	2200K-3000K SpectraSync™ Dim to Warm*
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
Indirect output/ft (specifiable in 50 lumen/ft increments)		I050	500
		I145	1450
Direct output/ft (specifiable in 50 lumen/ft increments)		D040	400
		D105	1050
Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		DS5	Soft-Start 5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Lutron Ecosystem Dimming
		LTW	Lutron Hi-Lume 1% 2-wire LED driver (120V forward phase only)
		DALI	DALI*
	DALIP	Powered DALI (2.0)*	
			*Must be ordered with 2230TD, 2750T or 2765T option
Circuiting		1C	1 Circuit
		2C	2 Circuit - Uplight/Downlight


*Additional lead time may be applicable. Contact factory.

Feature	Code	Options	Description
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt*
			*Available for NDM and D01 options only
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"
			*Add suffix V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V - 51" suspension kit with 5" canopies. Stems (where applicable), canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.

PROFILE



DISTRIBUTION

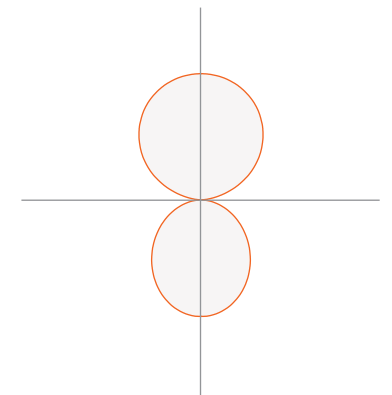

PERFORMANCE CHART

	Indirect:	Direct:
Lumen Range:	500-1450 lm/ft	400-1150 lm/ft
Efficacy Range:	113-137 lm/W	92-102 lm/W
CRI:	80, 90	
CCT:	27K / 30K / 35K / 40K / 50K / 27K9 / 30K9 / 35K9 / 40K9 / 50K9 / 2230TD / 2750T / 2765T	

SAE 102

SAE 102 Linear Pendant Indirect/Direct



A small-scale, modern, curved pendant with an extremely versatile performance package.

KEY FEATURES

- Vi Technology for specifiable output/wattage.
- SpectraSync™ Color Tuning Technology
- Continuous lens with flanged end casting to eliminate light leaks
- Pendant or Wall Mount
- Maximum color variation of 2 SDCM
- Separately controlled direct & indirect distribution
- Interlocking feature for row joining to eliminate light leak and facilitate ease of installation
- Controls compatible for integral daylight or occupancy sensors

ORDERING GUIDE SAE 102




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		102	102
Mounting		P	Pendant
Fixture Distribution		ID	Indirect/Direct
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		02	2', 610mm
		03	3', 914mm
		04	4', 1219mm
		06	6', 1829mm
		08	8', 2438mm
Downlight Diffuser		SOF	Soft Diffuse Lens
Finish/Color		C1	Matte White (Default)
		CC	Custom Color* *see specification sheet for details
Color Temperature		27K	2700K
		30K	3000K
		35K	3500K
		40K	4000K
		50K	5000K*
		27K9	2700K, 90 CRI
		30K9	3000K, 90 CRI
		35K9	3500K, 90 CRI
		40K9	4000K, 90 CRI
		50K9	5000K, 90 CRI*
		2230TD	2200K-3000K SpectraSync™ Dim to Warm*
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
Indirect output/ft (specifiable in 50 lumen/ft increments)		I050	500
		I145	1450
Direct output/ft (specifiable in 50 lumen/ft increments)		D040	400
		D105	1050
Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		DS5	Soft-Start 5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Lutron Ecosystem Dimming
		LTW	Lutron Hi-Lume 1% 2-wire LED driver (120V forward phase only)
		DALI	DALI*
	DALIP	Powered DALI (2.0)*	
			*Must be ordered with 2230TD, 2750T or 2765T option
Circuiting		1C	1 Circuit
		2C	2 Circuit - Uplight/Downlight


*Additional lead time may be applicable. Contact factory.

Feature	Code	Options	Description
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt*
			*Available for NDM and D01 options only
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"
			*Add suffix V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V - 51" suspension kit with 5" canopies. Stems (where applicable), canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.

PROFILE

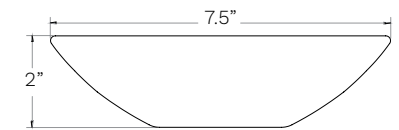

DISTRIBUTION

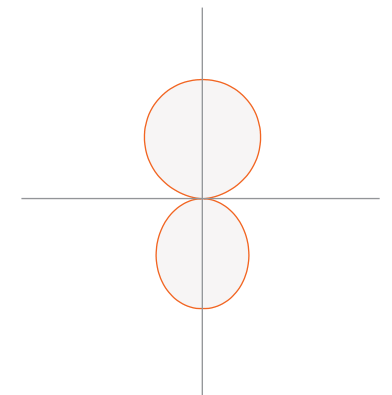


PERFORMANCE CHART

	Indirect:	Direct:
Lumen Range:	500-1450 lm/ft	400-1050 lm/ft
Efficacy Range:	113-137 lm/W	92-102 lm/W
CRI:	80 / 90	
CCT:	27K / 30K / 35K / 40K / 50K / 27K9 / 30K9 / 35K9 / 40K9 / 50K9 / 2230TD / 2750T / 2765T	

SAE 103

SAE 103 Linear Pendant Indirect/Direct

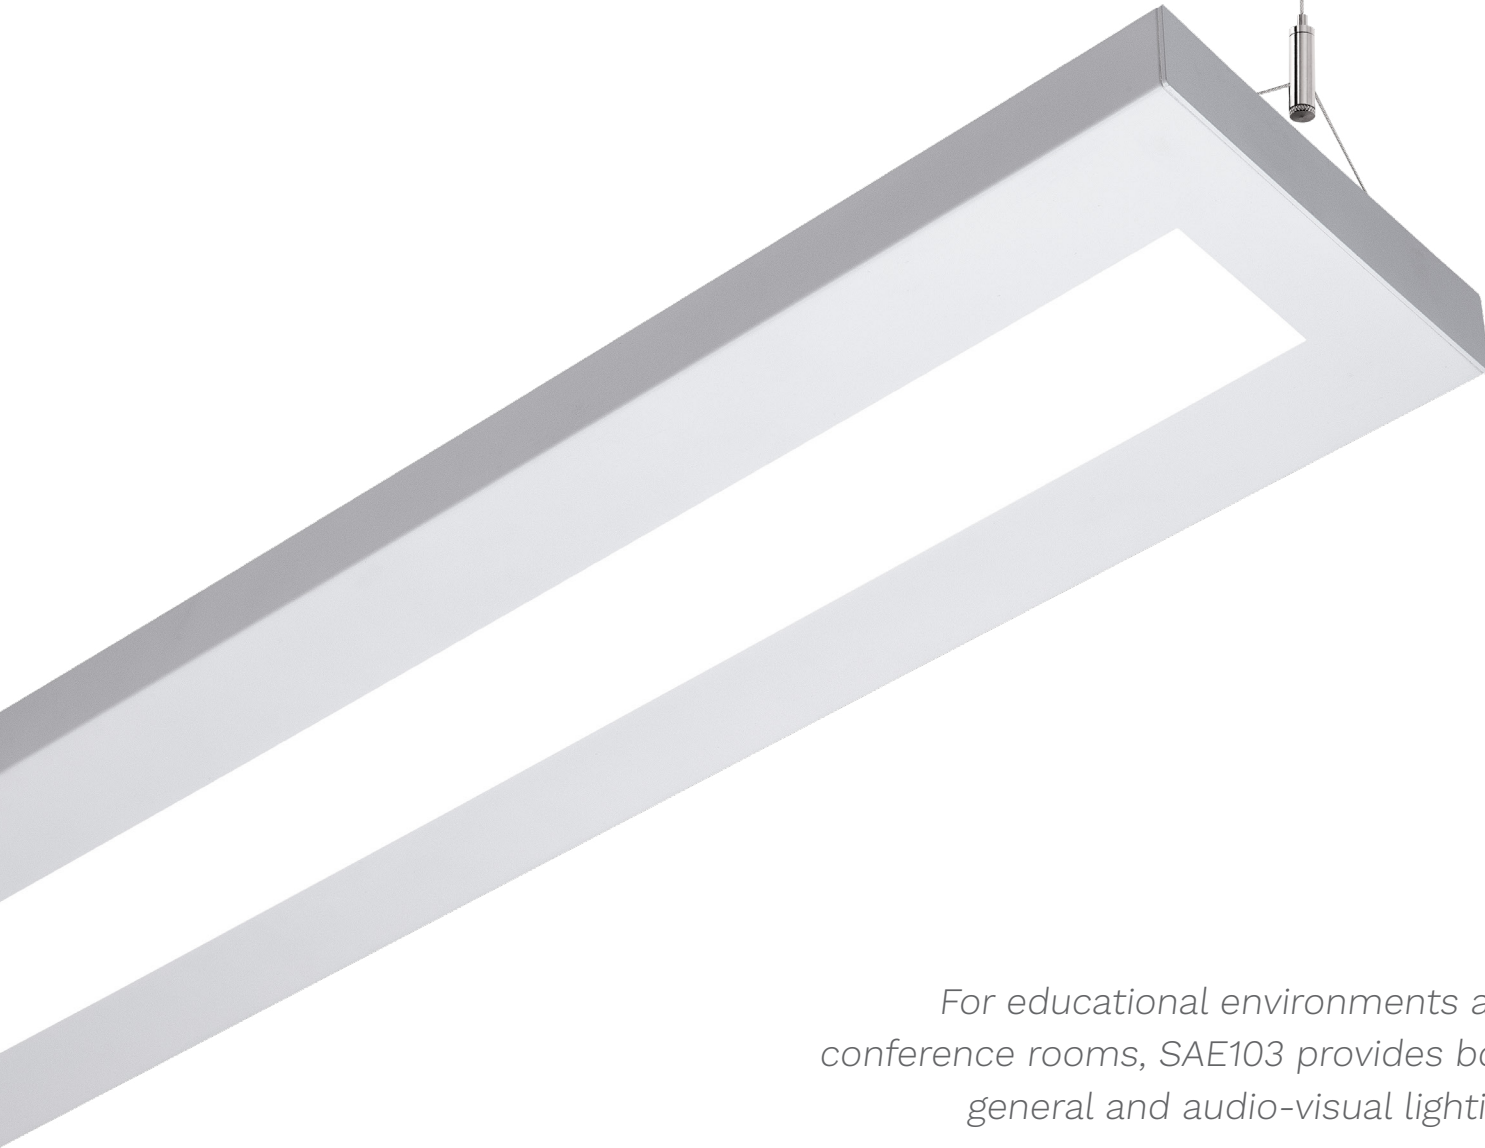

For educational environments and conference rooms, SAE103 provides both general and audio-visual lighting.

KEY FEATURES

- Vi Technology for specifiable output/wattage
- SpectraSync™ Color Tuning Technology
- 76% Indirect, 24% Direct light distribution (100% Indirect option available)
- Excellent Indirect light spread with 110° candela peak angle
- Maximum color variation of 2 SDCM
- Pendant or Wall Mount
- Controls compatible for integral daylight or occupancy sensors
- DesignLights Consortium (DLC) qualified – see www.designlights.org

ORDERING GUIDE SAE 103




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		103	103 LED Pendant Indirect/Direct
Mounting		P	Pendant
Fixture Distribution		ID	Indirect/Direct
Uplight Distribution		LPA	Low Peak Angle
Row Length (in feet)		---	Enter in foot increments. Note fixture lengths below
Max length in row		03	3', 914mm
		04	4', 1219mm
		06	6', 1829mm
		08	8', 2438mm
Downlight Diffuser		SGL	Soft Glow Lens
		BWO	Blade Baffle with Overlay
Finish/Color		C1	Matte White
		CC	Custom Color *see specification sheet for details
Color Temperature		27K	2700K
		30K	3000K
		35K	3500K
		40K	4000K
		50K	5000K*
		27K9	2700K, 90 CRI
		30K9	3000K, 90 CRI
		35K9	3500K, 90 CRI
		40K9	4000K, 90 CRI
		50K9	5000K, 90 CRI*
		2230TD	2200K-3000K SpectraSync™ Dim to Warm*
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
Output/ft specifiable in 50 lumens/ft increments		ID055	550 (min)
		ID110	1100 (max output available with Lutron drivers)
		ID140	1400 (max)
Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		DS5	Soft-Start 5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Hi-Lume 1% EcoSystem LED driver
		DALI	DALI*
		DALIP	Powered DALI (2.0)*
			*Must be ordered with 2230TD, 2750T or 2765T option
Circuiting		1C	1 Circuit


+Additional lead time may be applicable. Contact factory.

Feature	Code	Options	Description
Voltage		UNV	Universal Voltage
		120	120 Volt
		277	277 volt
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"

PROFILE



DISTRIBUTION

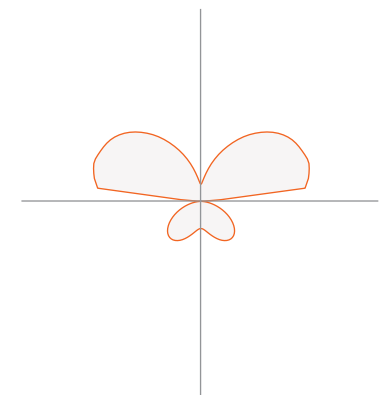


PERFORMANCE CHART

Lumen Range:	550-1400 lm/ft
Efficacy Range:	116-125 lm/W
CRI:	80 / 90
CCT:	27K / 30K / 35K / 40K / 50K / 27K9 / 30K9 / 35K9 / 40K9 / 50K9 / 2230TD / 2750T / 2765T

SAE 104

SAE 104 Linear Pendant Indirect/Direct

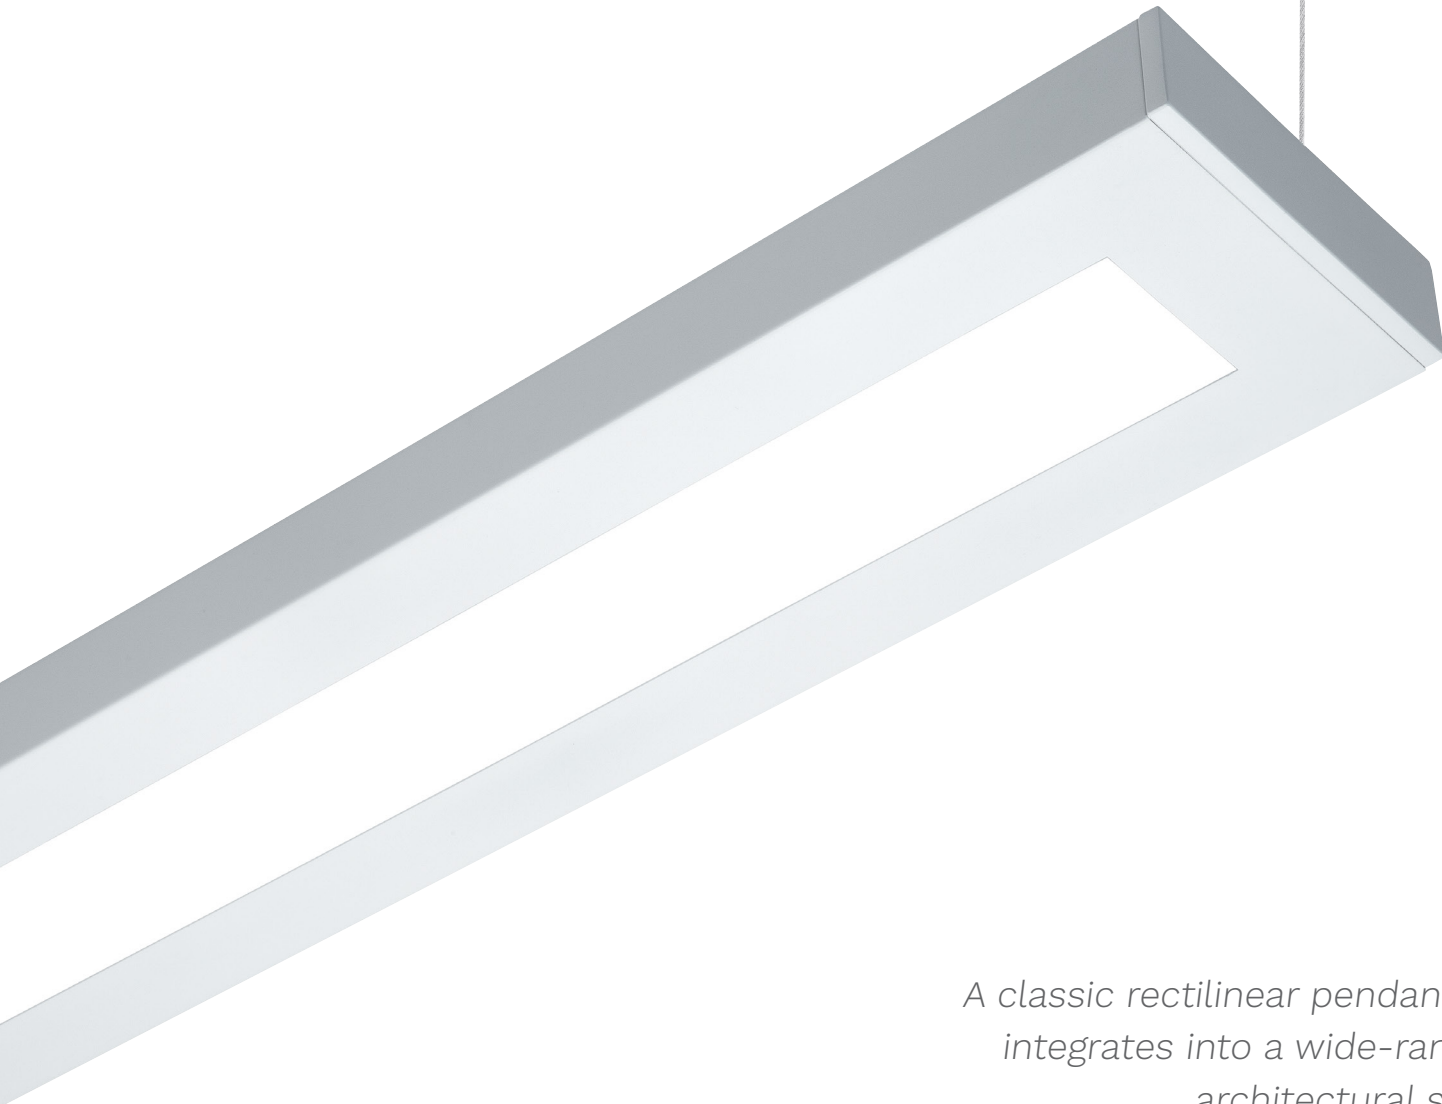

A classic rectilinear pendant that integrates into a wide-range of architectural styles.

KEY FEATURES


- Five convenient output and distribution options
- SpectraSync™ Color Tuning Technology
- Patented die-cast plate at each fixture end ensures straight rows
- Separately controlled direct & indirect distribution
- Excellent Indirect light spread with 110° candela peak angle
- Pendant or Wall Mount
- Controls compatible for integral daylight or occupancy sensors
- DesignLights Consortium (DLC) qualified, with some configurations qualifying for Premium – see www.designlights.org

ORDERING GUIDE SAE 104




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		104	104
Mounting		P	Pendant
Uplight Distribution		LPA	Low Peak Angle* *Not applicable for 10D distribution
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		04	4', 1219mm
		08	8', 2438mm
Downlight Diffuser		SOF	Soft Diffuse Lens
Finish/Color		C1	Matte White (Default)
		CC	Custom Color
Color Temperature		30K	3000K
		35K	3500K
		40K	4000K
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
			*Must be ordered with D05 Driver option
Output/ft (choose one output)		080	800 Lumens
		105	1050 Lumens
		130	1300 Lumens
		155	1550 Lumens
		187	1875 Lumens
Distributions (Percentage of above output)		2D	80% Up, 20% Down
		4D	60% Up, 40% Down
		6D	40% Up, 60% Down
		8D	20% Up, 80% Down
		10D	0% Up, 100% Down
Driver		NDM	Non Dimming
		D01	1% Dimming, 0-10V
		D05	5% Dimming, 0-10V*
Circuiting		1C	1 Circuit
		2C	2 Circuit - Uplight/Downlight* *Not available with 2D or 10D distribution
Voltage		UNV	Universal Voltage (120V through 277V)
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt* *Excludes Emergency Battery Option
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"
			*Add suffix /V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V = 51" suspension kit w/5" canopies; Stems (where applicable), canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.

PROFILE



DISTRIBUTION

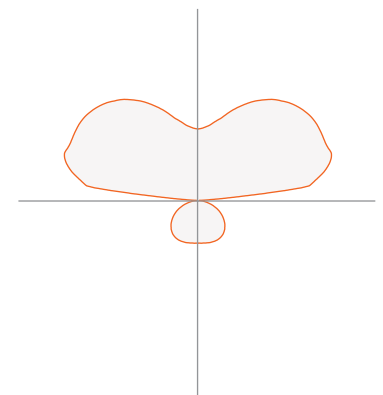

PERFORMANCE CHART

Lumen Range:	800-1875 lm/ft
Efficacy Range:	110-139 lm/W
CRI:	83 typ / 80 min
CCT:	30K / 35K / 40K / 2750T / 2765T

SAE 105

SAE 105 Linear Pendant Indirect



A graceful curved form providing indirect illumination for office and education applications.

KEY FEATURES


- Five convenient output options
- SpectraSync™ Color Tuning Technology
- Patented die-cast plate at each fixture end ensures straight rows
- Three housing styles providing varying amounts of indirect illumination
- Excellent Indirect light spread with 115° candela peak angle
- Controls compatible for integral daylight or occupancy sensors
- DesignLights Consortium (DLC) qualified, with some configurations qualifying for Premium – see www.designlights.org

ORDERING GUIDE SAE 105




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		105	105
Mounting		P	Pendant
Uplight Distribution		LPA	Low Peak Angle
Housing Style		PF	Perforated Housing (94% Indirect, 6% Direct)
		SQ	2" Square Perforated Housing (82% Indirect, 18% Direct)
		S	Solid Housing (100% Indirect)
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		04	4', 1219mm
		08	8', 2438mm
		12	12', 3657mm
Finish/Color		C1	Matte White (Default)
		CC	Custom Color
Color Temperature		30K	3000K
		35K	3500K
		40K	4000K
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
			*Must be ordered with D05 Driver option
Output/ft (choose one output)		080	800 Lumens
		105	1050 Lumens
		130	1300 Lumens
		155	1550 Lumens
		187	1875 Lumens
Driver		NDM	Non Dimming
		D01	1% Dimming, 0-10V
Circuiting		1C	1 Circuit
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt*
			*Excludes Emergency Battery Option
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"
			*Add suffix /V to replace all 2" non-feed canopy covers with 5" canopy covers. FA1/V = 51" suspension kit w/5" canopies; Stems (where applicable), canopies and feed cord are supplied in white regardless of fixture color unless otherwise specified.

PROFILE



DISTRIBUTION

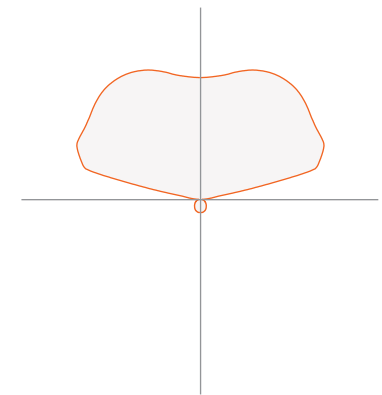


PERFORMANCE CHART

Lumen Range:	800-1875 lm/ft
Efficacy Range:	101-135 lm/W
CRI:	83 typ / 80 min
CCT:	30K / 35K / 40K

SAE 106

SAE 106 Linear Pendant Indirect/Direct

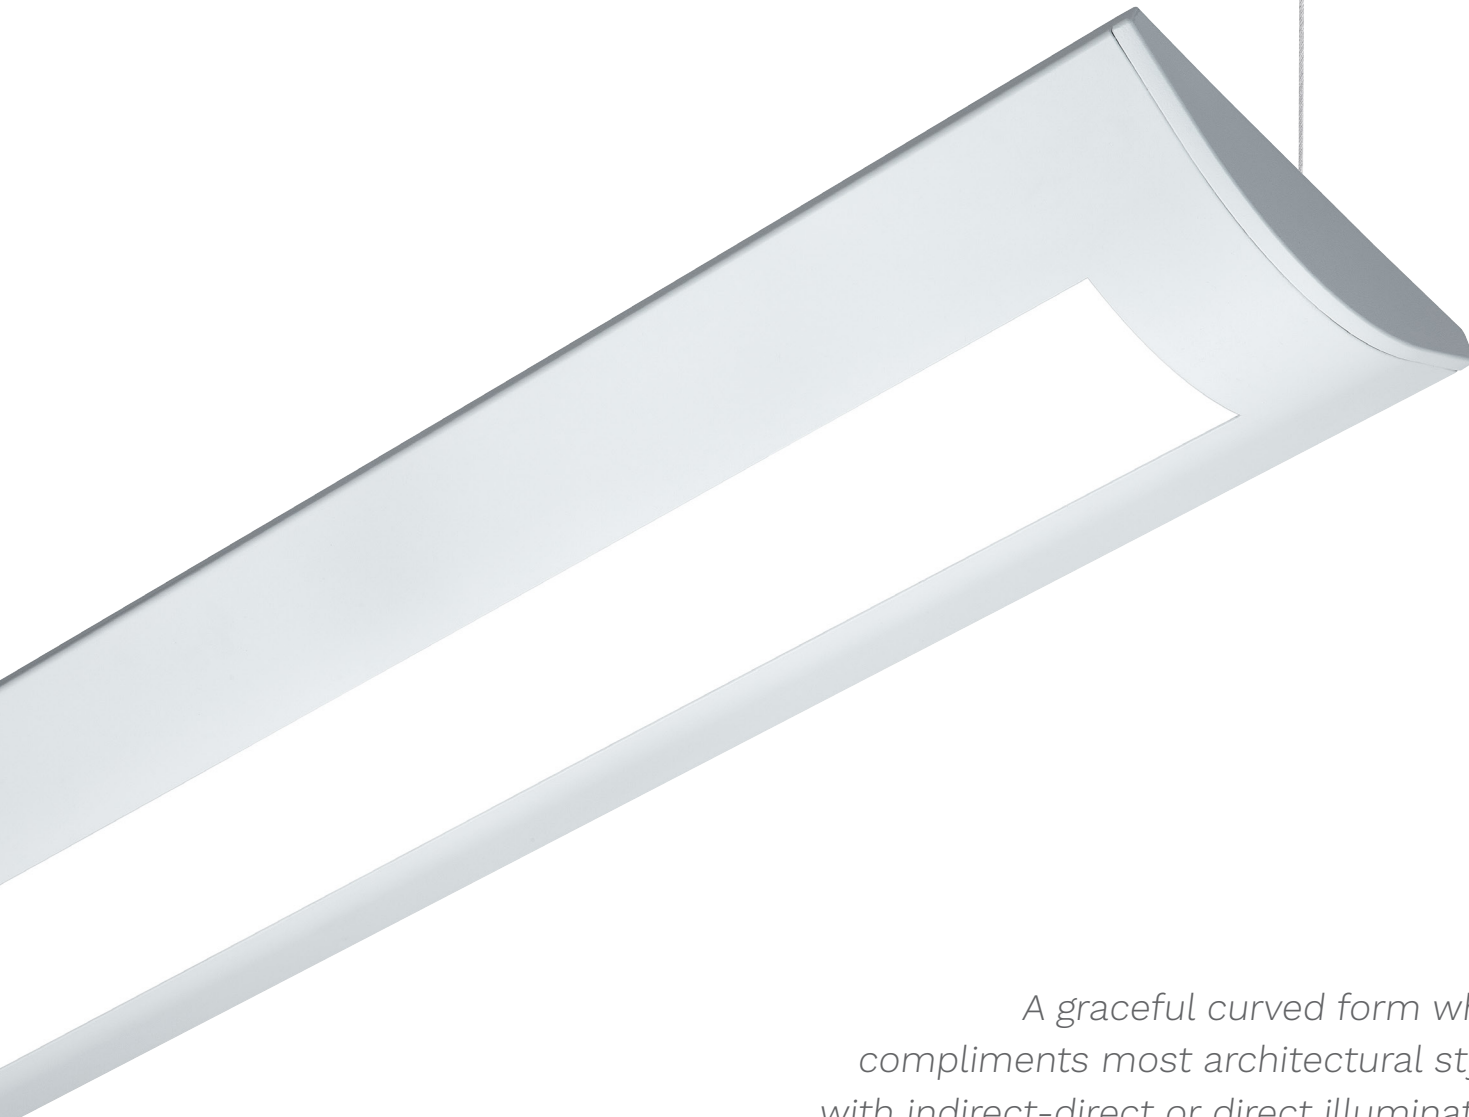

A graceful curved form which compliments most architectural styles with indirect-direct or direct illumination.

KEY FEATURES


- Five convenient output and distribution options
- SpectraSync™ Color Tuning Technology
- Patented die-cast plate at each fixture end ensures straight rows
- Separately controlled direct & indirect distribution
- Excellent Indirect light spread with 106° candela peak angle
- Controls compatible for integral daylight or occupancy sensors
- DesignLights Consortium (DLC) qualified, with some configurations qualifying for Premium – see www.designlights.org

ORDERING GUIDE SAE 106




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		106	106
Mounting		P	Pendant
Uplight Distribution		LPA	Low Peak Angle* *Not applicable for 10D distribution
Row Length (in feet)		—'	Enter in foot increments. Note fixture lengths below.
Max Length in row		04	4', 1219mm
		08	8', 2438mm
Downlight Diffuser		SOF	Soft Diffuse
Finish/Color		C1	Matte White (Default)
		CC	Custom Color
Color Temperature		30K	3000K
		35K	3500K
		40K	4000K
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
*Must be ordered with D05 Driver option			
Output/ft (choose one output)		080	800 Lumens
		105	1050 Lumens
		130	1300 Lumens
		155	1550 Lumens
		187	1875 Lumens
Distribution		2D	80% Up, 20% Down
		4D	60% Up, 40% Down
		6D	40% Up, 60% Down
		8D	20% Up, 80% Down
		10D	0% Up, 100% Down
Driver		NDM	Non Dimming
		D01	1% Dimming, 0-10V
Circuiting		1C	1 Circuit
		2C	2 Circuit- Uplight/Downlight* *Not available with 2D or 10D distribution
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt* *Excludes Emergency Battery Option
Suspension Kit		FA1	Suspension Kit, 51"
		FA2	Suspension Kit, 87"
		FA3	Suspension Kit, 219"
		FA4	Suspension Kit, 363"

PROFILE




DISTRIBUTION

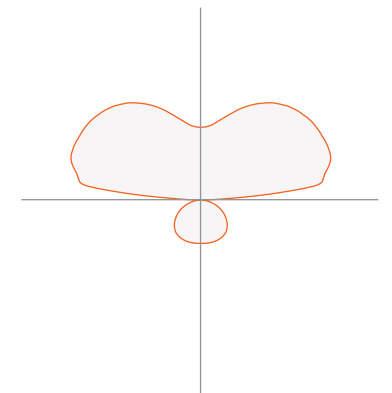

PERFORMANCE CHART

Lumen Range:	800-1875 lm/ft
Efficacy Range:	105-133 lm/W
CRI:	83 typ / 80 min
CCT:	30K / 35K / 40K

SAE 201 Adjustable Concealed Cove

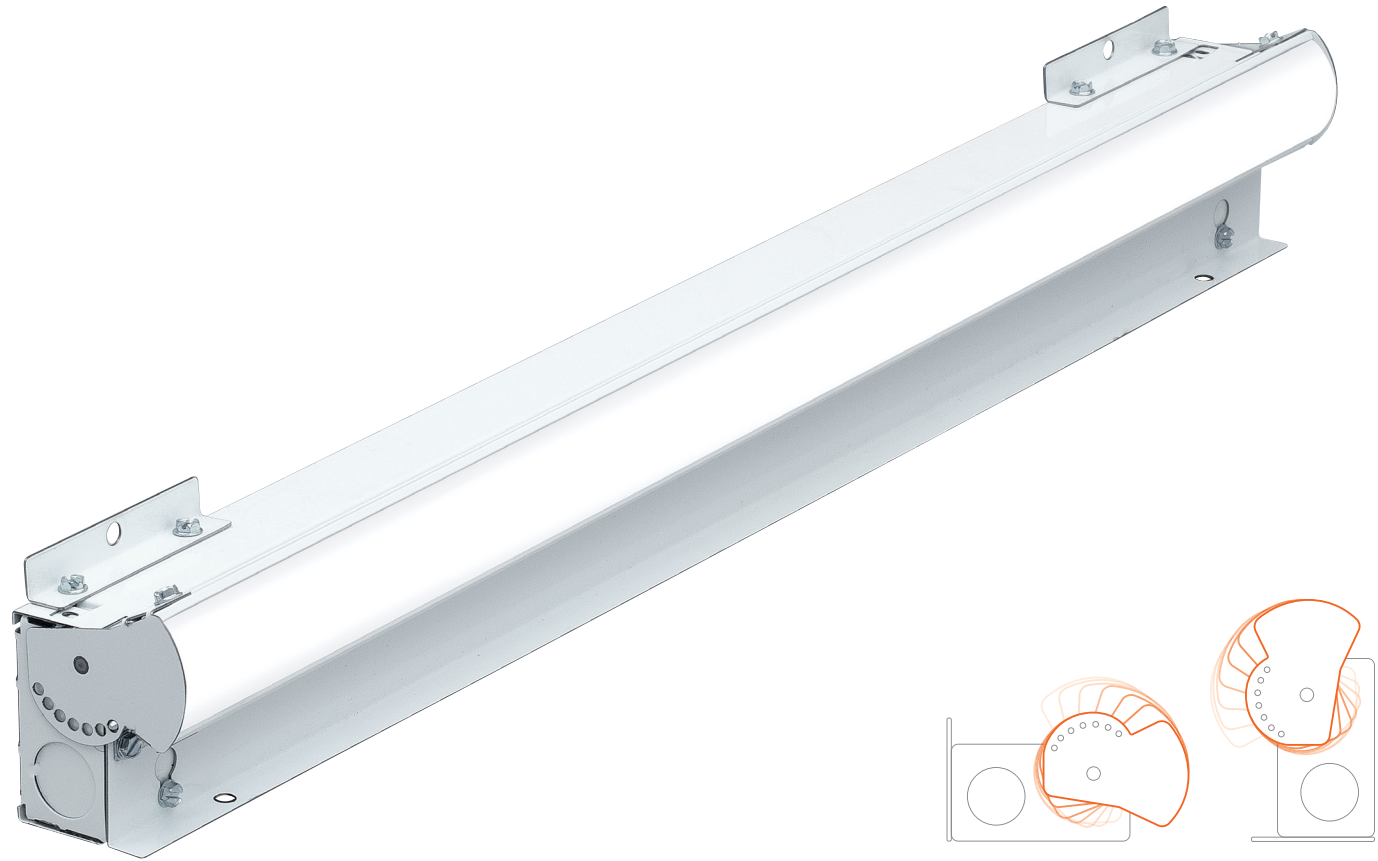

SAE201 is a versatile, concealed, architectural cove luminaire with the flexibility to adjust beam angle pre or post installation.

KEY FEATURES


- Vi Technology for specifiable output/wattage
- SpectraSync™ Color Tuning Technology
- 90° adjustable lens range with 7 increments
- Adjustable after install
- Can be installed with flexible conduit for curved applications
- Accommodates corners with optional Corner Wiring Kits
- Fixture lengths of 1', 2', 3' & 4'. (Contact Factory for longer lengths)




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		201	201 Adjustable LED Cove
Mounting		CC	Concealed Cove
Fixture Distribution		AI	Asymmetric Indirect
Row Length (in feet)		---	Enter in foot increments Note fixture lengths below.
Max length in row		01	1, 305mm
		02	2, 610mm
		03	3, 914mm
		04	4, 1219mm
Finish/Color		C1	Matte White
Color Temperature		27K	2700K
		30K	3000K
		35K	3500K
		40K	4000K
		50K	5000K*
		27K9	2700K, 90 CRI
		30K9	3000K, 90 CRI
		35K9	3500K, 90 CRI
		40K9	4000K, 90 CRI
		50K9	5000K, 90 CRI*
		2230TD	2200K-3000K SpectraSync™ Dim to Warm*
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
			*Must be ordered with D05 or DS5 Driver options; excludes 2' and 3' lengths
Diffuser		SGL	Soft Glow Lens
Output/ft (specifiable in 50 lumens/ft increments)		I050	500 (Not available in 1' individual)
		I170	I170
Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		DS5	Soft-Start 5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Hi-lume 1% EcoSystem LED driver
		LTW	Lutron Hi-Lume 1% 2-wire** (LTE -120V forward phase only)
		DALI	DALI*
	DALIP	Powered DALI (2.0)*	
			**120V only and not applicable on 1 *Must be ordered with 2230TD, 2750T or 2765T option
Circuiting		1C	1 Circuit

+Additional lead time may be applicable. Contact factory.

Feature	Code	Options	Description
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
Thru-wiring		W1	No Thru Wire
		W2	Provide Normal and Emergency Thru Wiring*
		W3	Provide Normal Thru Wiring Only
			*Only applicable when specified with emergency

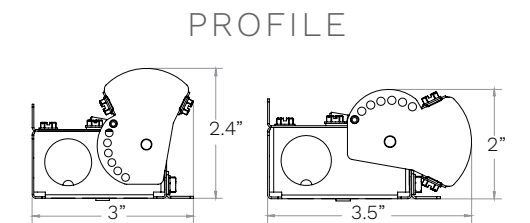


DISTRIBUTION

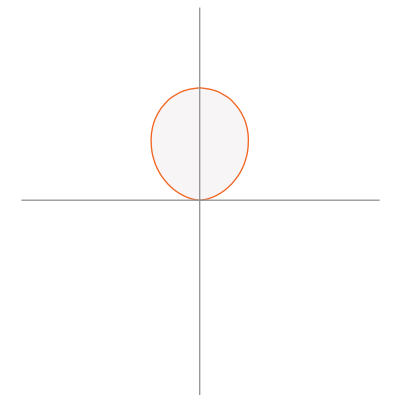

PERFORMANCE CHART

Lumen Range:	500-1700 lm/ft
Efficacy Range:	95-109 lm/W
CRI:	80 / 90
CCT:	27K / 30K / 35K / 40K / 50K / 27K9 / 30K9 / 35K9 / 40K9 / 50K9 / 2230TD / 2750T / 2765T

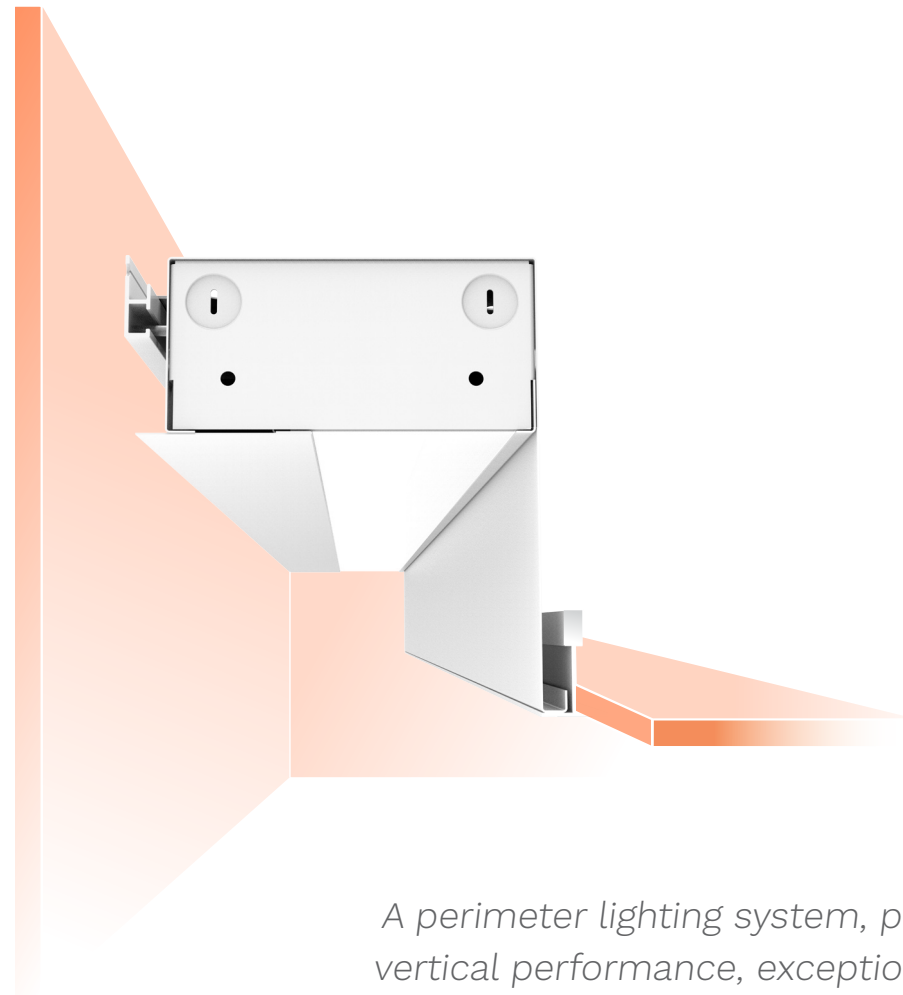

A perimeter lighting system, providing vertical performance, exceptional task uniformity and general ambient lighting levels when required.


KEY FEATURES

- Vi Technology for specifiable output/wattage
- Provides perimeter wall lighting through 6½" slot
- Can be specified with lens or baffle with overlay (S) or lens regressed above the ceiling (R)
- System connectors allow continuous slot around room, even around corners
- Easy installation with wall-mounting rail and hook-and-lock system
- Floating ceiling effect


Feature	Code	Options	Description
Program		SAE	SAE Program
Series		202	202 Recessed Linear Wall/Slot
Ceiling Type		DW	Drywall Ceiling
		G	Grid
Row Length (in feet)		___'	Enter in foot increments
Max Length in row		02	2', 609mm
		03	3', 914mm
		04	4', 1219mm
		06	6', 1829mm
		08	8', 2438mm
Shielding Position		R/	Regressed Lens
		S/	Shielding at Top
Diffuser		BWO	Blade Baffle with Overlay*
		SGL	Soft Glow Lens
		*S shielding only	
Finish/Color		C1	Matte White
Color Temperature		27K	2700K
		30K	3000K
		35K	3500K
		40K	4000K
		50K	5000K*
		27K9	2700K, 90 CRI
		30K9	3000K, 90 CRI
		35K9	3500K, 90 CRI
		40K9	4000K, 90 CRI
	50K9	5000K, 90 CRI*	
Output/ft (specifiable in 50 lumens/ft increments)		D040	400
		D110	1100
Driver		NDM	Non Dimming
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V
		LEC	Lutron Ecosystem Dimming
		LTW	Hi-Lume 1% 2-wire LED driver (120V forward phase only)
		DALI	DALI*
		DALIP	Powered DALI (2.0)*
	Circuiting		1C
Voltage		UNV	Universal Voltage
		120	120 Volt
		240	240 Volt
		277	277 Volt
		347	347 Volt*
Straight Run Termination		_EC	End Cap. Enter quantity.
		_SE	Straight Extension, 2" - 12." Enter quantity.

+Additional lead time may be applicable. Contact factory.

Feature	Code	Options	Description
Thru-wiring		W1	No Thru Wire
		W2	Provide Normal and Emergency Thru Wiring*
		W3	Provide Normal Thru Wiring Only
		*Only applicable when specified with emergency	

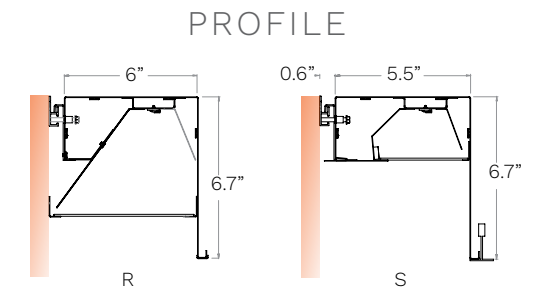

DISTRIBUTION

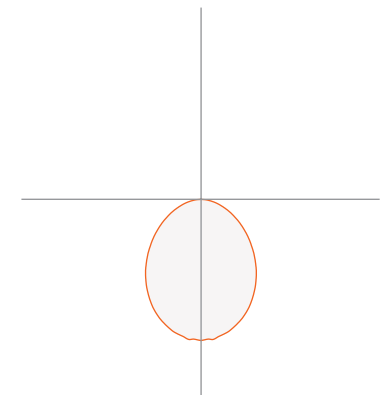

PERFORMANCE CHART

Lumen Range:	400-1100 lm/ft
Efficacy Range:	83-86 lm/W
CRI:	80 / 90
CCT:	27K / 30K / 35K / 40K / 50K / 27K9 / 30K9 / 35K9 / 40K9 / 50K9

SAE 301

SAE 301 Recessed Troffer



SAE 301 is a versatile, recessed, direct enclosed troffer, available in 3 sizes.

KEY FEATURES


- Vi Technology for specifiable output/wattage
- SpectraSync™ Color Tuning Technology
- Diffuser is a high efficiency one piece extruded acrylic lens
- Dropped center channel for excellent source diffusion
- Available in 2' x 2', 2' x 4' and 1' x 4' sizes
- PoE Lighting and Control options available

ORDERING GUIDE SAE 301




Feature	Code	Options	Description
Program		SAE	SAE Program
Series		301	301 LED Recessed Troffer
Ceiling Type		G	15/16" Grid Ceiling
		NG	9/16" Narrow Face Grid Ceiling
		SS	9/16" Screw Slot Grid Ceiling
		DW	Drywall Ceiling
Distribution		D	Direct
Size		14	1' x 4' Fixture
		22	2' x 2' Fixture
		24	2' x 4' Fixture
Diffuser		SGL	Soft Glow Lens
Finish/Color		C1	Matte White
Color Temperature		30K	3000K
		35K	3500K
		40K	4000K
		2750T	2700K-5000K SpectraSync™ Tunable White*
		2765T	2700K-6500K SpectraSync™ Tunable White*
		*Must be ordered with D05 or DS5 Driver options	
Output (specifiable in 100 lumen increments)		D17 (min)	1700
		D61 (max)	6100
Driver		NDM	Non Dimming
		D05	5% Dimming, 0-10V*
		DS5	Soft-Start 5% Dimming, 0-10V*
		D01	1% Dimming, 0-10V
		DS1	Soft-Start 1% Dimming, 0-10V
		D00	Dim-to-off (1%), 0-10V
		DS0	Soft-Start Dim-to-off (1%), 0-10V *Must be ordered with 2750T or 2765T option
		DALI	DALI*
	DALIP	Powered DALI (2.0)*	
Voltage		UNV	Universal Voltage (120V through 277V)
		347	347 Volt *Excludes Emergency Battery Pack 'EF' Option. Excludes DALI, and DALIP
			+Additional lead time may be applicable. Contact factory.

PROFILE




DISTRIBUTION

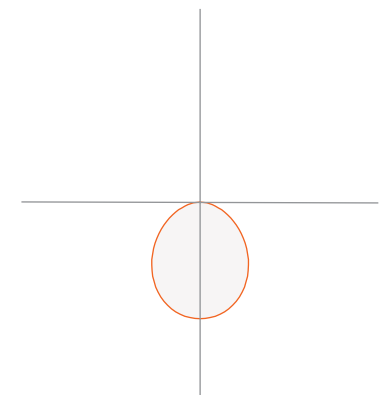


PERFORMANCE CHART

Lumen Range:	1700-6100 lm/ft
Efficacy Range:	91-133 lm/W
CRI:	83 typ / 80 min
CCT:	30K / 35K / 40K / 2230TD / 2750T / 2765T

SAE 100 LINEAR

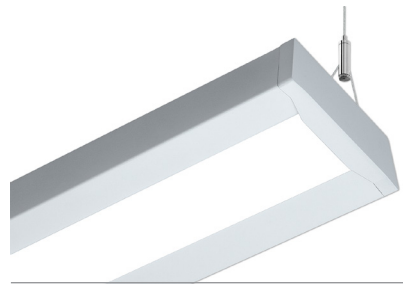


SAE101
Pendant




Wall Mount




SAE102
Pendant




Wall Mount

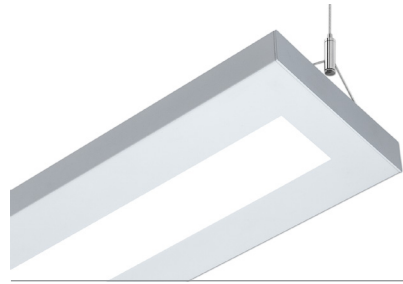

SAE103
Pendant




Wall Mount



w/ Baffle



100% Indirect

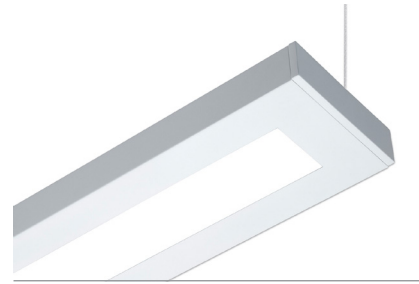

SAE104
Pendant




Wall Mount



SAE105
Pendant




Solid Housing




Square Perf



Shelf Style End Cap

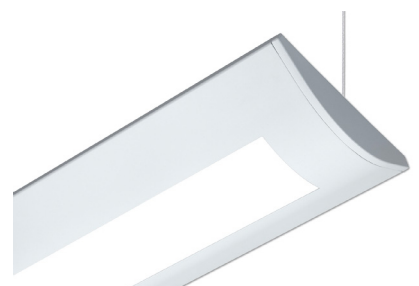


SAE106
Pendant




Shelf Style End Cap

SAE 200 PERIMETER

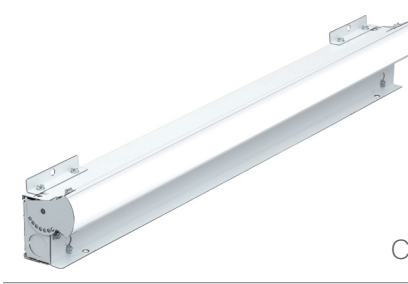


SAE201
Concealed Cove



Adjustable after install



SAE202
Soft Glow Lens



Regressed Lens



w/ Baffle Lens

SAE 300 RECESSED



SAE301
2 X 4



1 X 4



2 X 2

Current 

HLI Solutions, Inc

701 Millennium Blvd.
Greenville, SC 29607

currentlighting.com/litecontrol

© 2022 Litecontrol Corporation. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev August 8, 2022)

SAE_Brochure_R01