



Recessed Mount LED AC-Only Exit (LUELR Series)



BEFORE YOU BEGIN

Read these instructions completely and carefully.

When using electrical equipment, basic safety precautions should always be followed including the following.



WARNING/AVERTISSEMENT

- Review the diagrams thoroughly before beginning. If you feel you do not have electrical wiring experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code. If you are unfamiliar with methods from installing electrical wiring, secure the services from a qualified licensed electrician.
- Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Using the light switch to turn off power is not sufficient to prevent electrical shock.
- Do not use outdoors
- Do not let power supply cords touch hot surfaces
- Do not mount near gas or electric heaters
- Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition
- Do not use this equipment for other than its intended use
- All servicings should be performed by qualified personnel only

INSTALLER:

- See unit label for additional model specifications

Save These Instructions


Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

Components Supplied

- LED Edge-Lit EXIT Sign
- Adjust Bracket and Bar hanger
- Hardware Bag

Before Installation


Electrical Connections

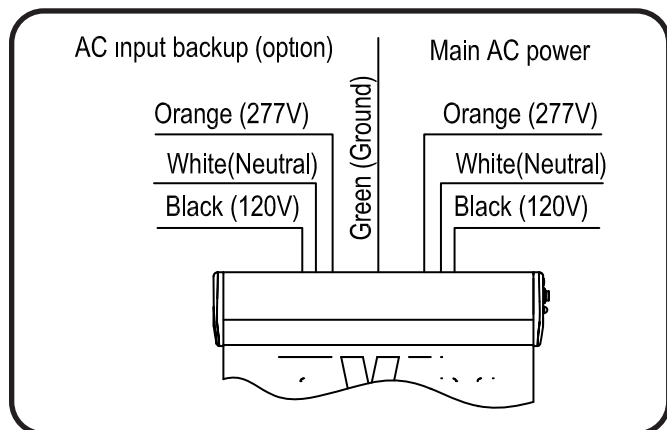

- 1 If using 120VAC, connect the black and white wires to the building utility
- 2 If using 277VAC, connect the orange and white wires to the building utility
- 3 Connect ground wires to building utility.
- 4 Cap off unused wires. In all cases use standard wire nuts in connection to wires

Before Installation


Determine Directions

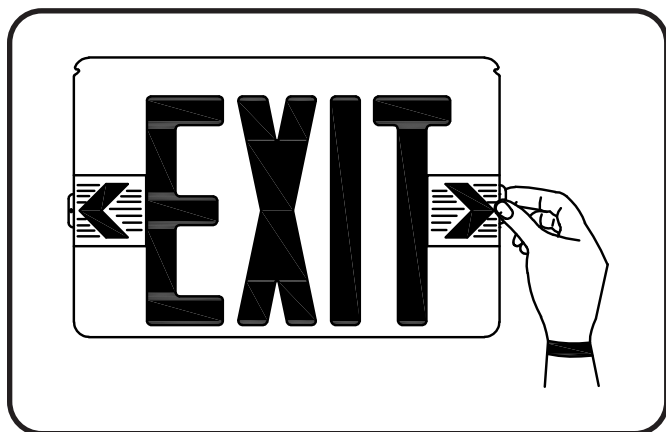

- 1 If indicator chevron is required, leave chevron and remove locator template.
- 2 If indicator chevron is not required, remove both the chevron and locator template.

NOTICE:
MUST WEAR GLOVE FOR ALL INSTALLATION PROCESSES


Installation - Recessed Ceiling Mounting

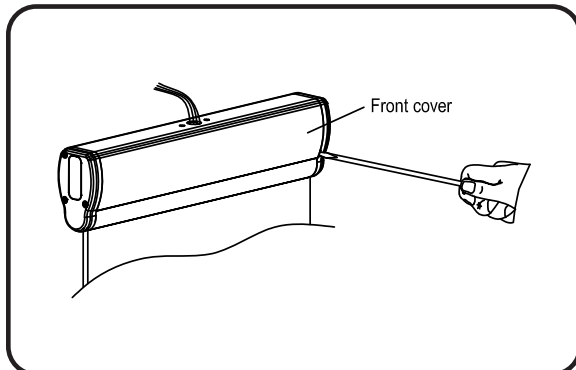

NOTE:
FIRST TURN OFF ELECTRICITY


① Use screwdriver to open front cover, feed AC wires out of housing

② Unscrew and remove trim plate from metal box.

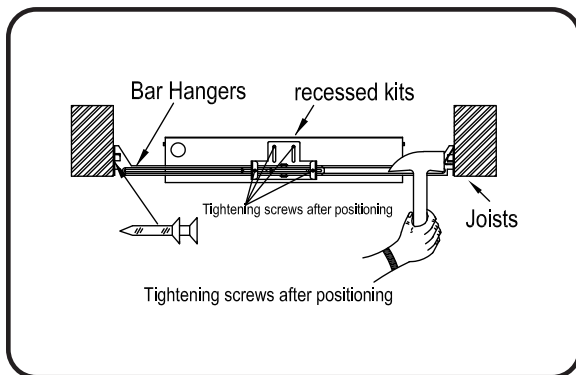


③ Position recessed kits and bar hangers between joists. Make sure bar hangers are to be hanged in the correct position. Position recessed kits temporarily by hammering "nail-in" tabs on bar hangers, then secure permanently with nails. Bar hangers should be level with bottom of joists.

④ Adjust height of recessed kits vertically using adjusting slots and then tightening all screws on adjusting slots and bar hanger bracket to secure adjusting bracket and bar hangers.

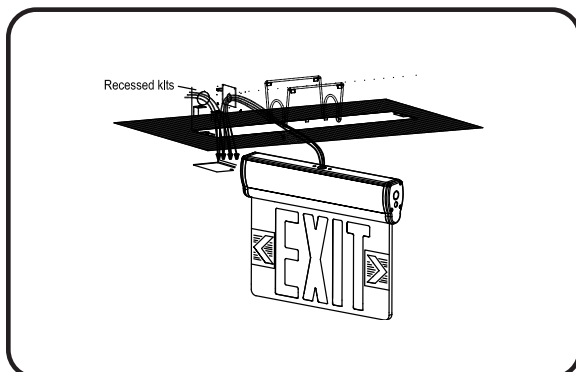


⑤ Make proper electrical connections at J-box in the metal housing, refer to "ELECTRICAL CONNECTIONS" You may need to use holding wire during wiring.

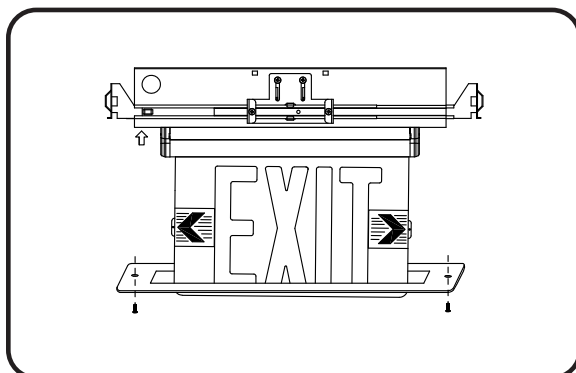


⑥ Insert fixture into metal box and snap by spring, fix trim plate on the metal box by 2 screws

Installation - Recessed Ceiling Mounting - Continued

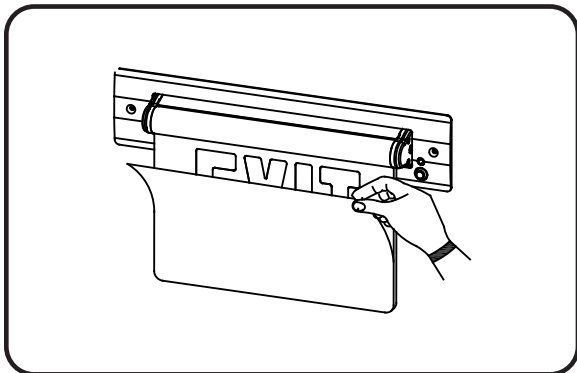

- ⑦ Peel off protective film from both sides of EXIT panel
- ⑧ Determine direction for chevron indicator (See DETERMINE DIRECTION)
- ⑨ The unit can be installed on any surface, you may rotate the EXIT panel in any angle from 0° to 180°

Installation - Recessed Wall Mounting

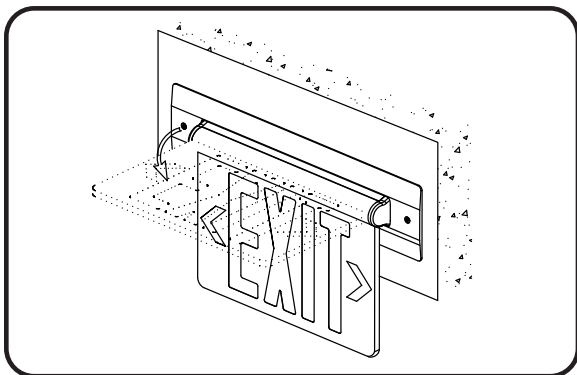

- ① Reference 1-8 step in recessed ceiling mounting above for recessed wall mounting.
- ② Recessed ceiling mounting rotate 90° become recessed wall mounting.

**RECYCLING INFORMATION**

All steel, aluminum, and thermoplastics parts are recyclable.
NOTICE: Emergency units contain rechargeable batteries which must be recycled or disposed of properly.