

CANOPY




- Low profile, rugged die-cast aluminum housing with corrosion resistant powder coat finish
- 3/4" conduit entry on top for pendant mounting
- 1/2" conduit entry on three sides
- Capable of mounting on a 3 - 3 1/2" junction box
- UV-stabilized acrylic prismatic refractor with self-retaining screws




STOCK SKUs	Wattage	CCT/CRI	Lumens	LPW	Voltage	Equivalency	Color
SGC-F-60-LSCS	25	3000	3562	155	120-277	100W	Dark Bronze
		4000	3775	164			
		5000	3668	159			
	40	3000	5441	133		150W	
		4000	6002	146			
		5000	5609	137			
	60	3000	7225	122		250W	
		4000	8312	140			
		5000	7769	131			


PERFORMANCE




SGC-20-4K





SGC-40-4K



SGC-60-4K

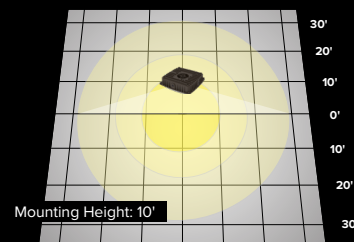

DIMENSIONS

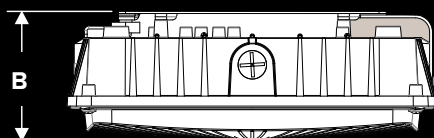

A
10.4"
263 mm

B
4.2"
107 mm

Weight
6.4 lbs.
2.9 kg