

2 CIRCUIT / 2 NEUTRAL

NORDIC  ALUMINIUM

TEK Lighting Track System



The Power Behind the Fixture.

Architectural grade | ISO 9001 quality | JIT availability | Open architecture - ready for your fixtures now!



- High quality, UL listed 2-cct/2-neutral lighting track systems, 120V
- Low profile, easy & flexible installation
- Open architecture — ready for your fixtures now!


Superior performance for dimmed lighting, low life-cycle cost, and high power handling capability make **Global track TEK** lighting an excellent choice.

Global TEK 2-cct/2-neutral track is ideal for dimming intensive applications. The independent neutrals guarantee that the two circuits are completely isolated. Cross-circuit interference and neutral harmonics are completely eliminated, essential for trouble free dimming. The lack of harmonics ensures superior fixture performance and longer equipment life. Independent neutrals also offer twice the power handling capacity of ordinary common neutral track.

Global TEK track is engineered to be durable, dependable, and simple-to-install lighting solution. The track's extruded aluminum construction and continuously crimped conductor ensure mechanical strength and electrical reliability. The integral suspension rail and predrilled mounting holes of the track simplify installations.



Curved track
available upon request

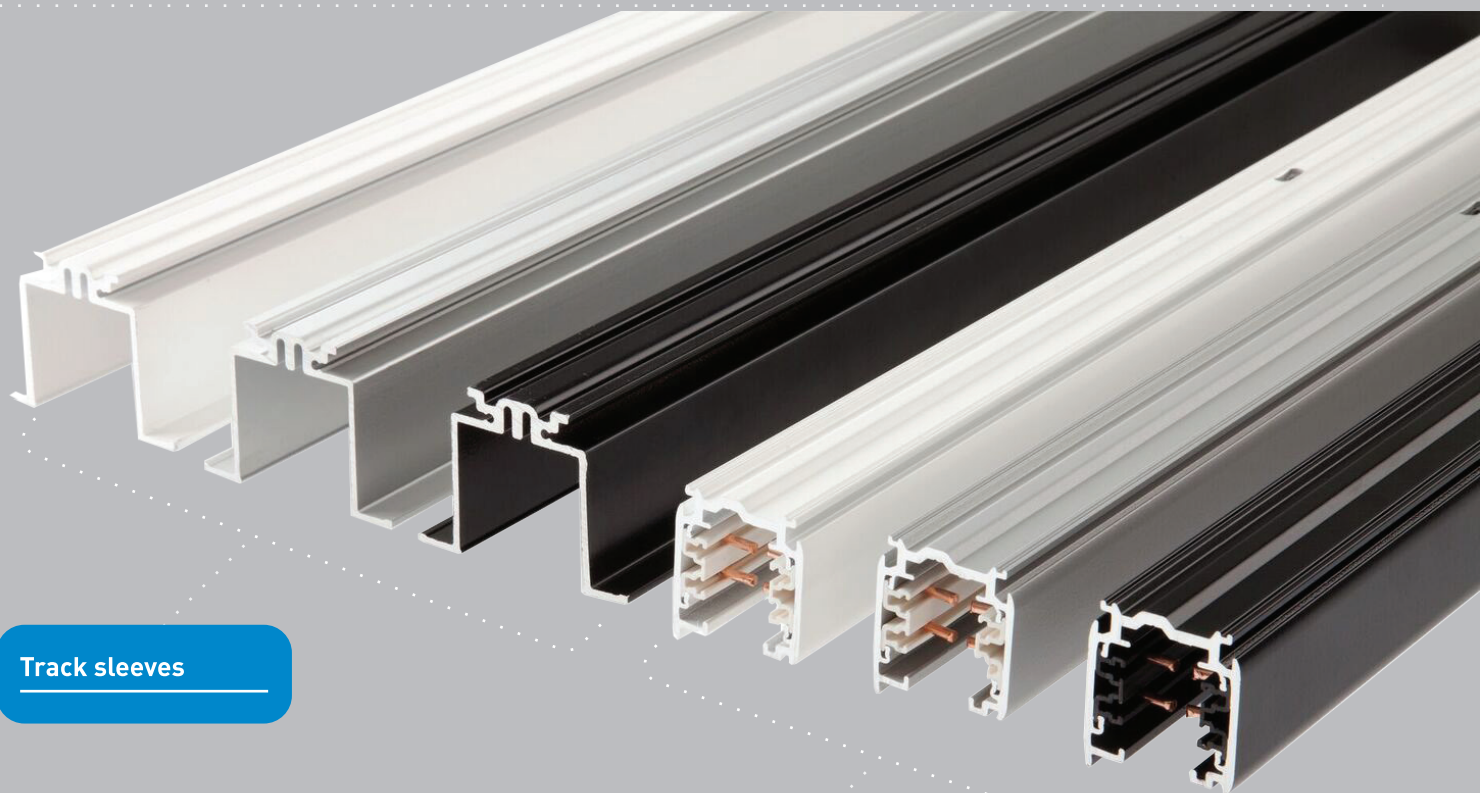

Track sleeves

Lighting tracks



www.nordicaluminiumna.com
orders@nordicusa.us

NORDIC ALUMINIUM

TEK Track System

GLOBAL TEK 2-CIRCUIT / 2-NEUTRAL 120V TRACK

track ORDERING INFORMATION

LENGTHS* - 4', 8', 12'

COLOR CODES - WHITE (-3), BLACK (-2), GREY (-1)

NOMINAL LGTH	ACTUAL LGTH	TWO CIRCUIT #
4-feet	4-feet	TEK 44-(color)
8-feet	8-feet	TEK 48-(color)
12-feet	12-feet	TEK 412-(color)

Example: 8-foot track section in black: TEK 48-2

recessed track sleeve ORDERING INFORMATION

LENGTHS* - 4' 3.5", 8' 3.5", 12' 3.5"


COLOR CODES - WHITE (-3), BLACK (-2), GREY (-1)

NOMINAL LGTH	ACTUAL LGTH	TWO CIRCUIT #
4-feet	4' 3.5"	FTP 44-(color)
8-feet	8' 3.5"	FTP 48-(color)
12-feet	12' 3.5"	FTP 412-(color)

COLOR CHOICE

Track available in White, Black or Grey

Components available in White, Black or Grey

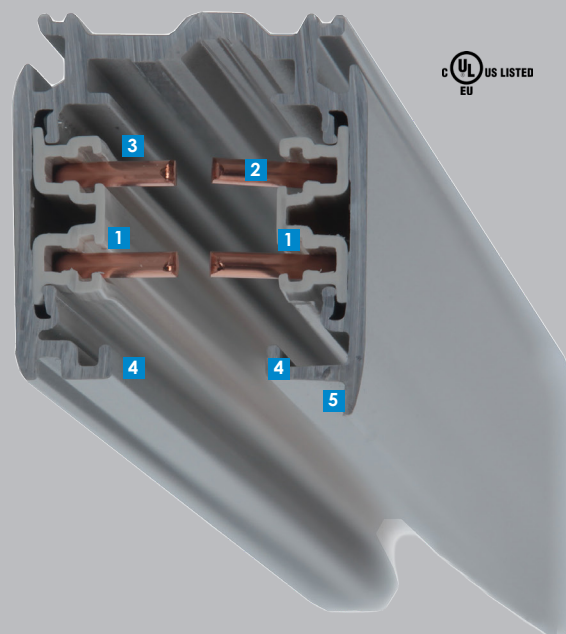

1. Independent Neutrals

Enable greater power capacity (2 x 20A); Dimming capability - dim on two independent circuits without harmonics or interference on the neutral conductor.

2. Oversized Conductors

For higher operating safety and reduced overload potential.

3. Secure Bus Bar Insulation

Firmly crimped insulation secures both conductors and insulation for the life of product.


4. Separate Mechanical Suspension Points

Provides superior weight bearing capacity; ensures electrical contact integrity and reduces likelihood of arcing.

5. Polarity Ridge


Takes the guesswork out of connector and track alignment during installation.

TEK Track Components



ADJUSTABLE CONNECTOR

TEK 24 (-1, -2, -3)



OUTLET BOX COVER


GES 15 (-1, -2, -3)



CURRENT LIMITING DEVICE


TEK 11CB (-1, -2, -3)

TEK 12CB (-1, -2, -3)




FEEDABLE X CONNECTOR

TEK 38 (-1, -2, -3)



FEEDABLE L CONNECTOR


Adjustable polarity. TEK 34 (-1, -2, -3)



FEEDABLE T CONNECTOR


Adjustable right polarity. TEK 39 (-1, -2, -3)

Adjustable left polarity. TEK 40 (-1, -2, -3)




LIVE MIDDLE FEED

TEK 14 (-1, -2, -3)



LINEAR COUPLER

TEK 21 (-1, -2, -3)



LIVE END FEED

TEK 11 (-1, -2, -3)


Mirror image, TEK 12 (-1, 2, -3)



DEAD ENDS

Must be ordered separately.

TEK 41 (-1, -2, -3)



TRACK LENGTH & FIELD CUTTING TOOL

All-in-one hand tool bends conductors to manufacturer specifications and includes gauge to verify correct length.

XTSV 12

PRODUCT ORDERING COLOR CODES

White (-3) Black (-2) Grey (-1)

Mounting / Suspension



Strain Relief
XTSA 510 (-1, -2, -3)

NIPPLE ROTATING

Cable (available in
5', 9', 15' lengths)
SKB 34




CABLE MOUNT



Includes stem &
canopy. Available
in 12, 18, 24,
48 inch lengths.
SPUS (length) (-2,-3)

STEM KITS

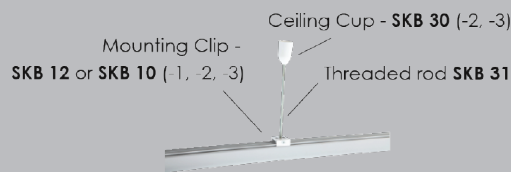

THREADED ROD MOUNT

END FEED STEM SUSPENSION POINT
Includes bracket & cover. (Stem not included)
SP4E (-2, -3) Also available: specify
SP4L, **SP4T**, or **SP4X** for L, T, or X configurations.



NIPPLE ROTATING

HTEK 61-8/9 (8mm) or
HTEK 61-12/9 (12mm)



Includes bracket & cover.
(Stem not included) **SP4P** (-2, -3)

PRODUCT ORDERING COLOR CODES


White (-3) Black (-2) Grey (-1)



ADAPTOR

Switchable between circuits & on/off.
Includes rotation lock.
TEK 100 (-1, -2, -3)

New Suspension Kits for TEK Track Family



TRACK MOUNTING CLIPS

SKB 10 **SKBT** (-1, -2, -3)
SKB 12 **SKBTX** (-1, -2, -3)

TRACK MOUNTING CLIP FOR M6 AND 1/4" - 20 UNC ROD

SKB 11R-1UL (grey) **SKB 11R-2UL** (black)
SKB 11R-3 **SKB 11R-3UL** (white)
Thread: M6 1/4"-20 UNC Fmax 150N

TRACK MOUNTING CLIP FOR DIA 1.5mm WIRE

SKB 11WL (-1, -2, -3)
Fmax 150N



SKB 18 (-1, -2, -3)

Extended suspension Bracket
for looped aircraft cable



SKB 16 (-1, -2, -3)

Suspension Bracket
for looped aircraft cable

PRODUCT ORDERING COLOR CODES

White (-3) Black (-2) Grey (-1)

Part Number	Description
93034059	FTP 41-1 RECESSED END CAP
93034039	FTP 412-2 BLK 12 FT-RECESSED TRK JACKET
93034033	FTP 44-2 BLK 4 FT-RECESSED TRK JACKET
93034036	FTP 48-2 BLK 8 FT-RECESSED TRK JACKET
93034038	FTP-412-1 NAT 12 FT-RECESSED TRACK JACKET
93034040	FTP-412-3 WHT 12 FT-RECESSED TRACK JACKET
93034032	FTP-44-1 NAT 4 FT-RECESSED TRACK JACKET
93034034	FTP-44-3 WHT 4 FT-RECESSED TRACK JACKET
93034035	FTP-48-1 NAT 8 FT-RECESSED TRACK JACKET
93034037	FTP-48-3 WHT 8 FT-RECESSED TRACK JACKET
93054652	GEA7-9/16
95019430	HAR-GE2026-5737-NO WIR-GBL-BLACK
95019429	HAR-GE2026-5737-NO WIR-GBL-WHITE
95024923	HTEK - 3 ADAPTER 277V
93056446	HTEK 11-2 BLK LIVE END FEED
93041989	HTEK 11-3 LIVE END FEED
93056447	HTEK 14-2 BLK LIVE CENTER FEED
93041990	HTEK 14-3 LIVE CENTER FEED
93056448	HTEK 21-2 BLK LINEAR COUPLER
93056453	HTEK 24-2 BLK ADJUSTABLE CONNECTOR
93056449	HTEK 34-2 BLK FEEDABLE L-CONNECTOR, ADJ
93041992	HTEK 34-3 FEEDABLE L-CONNECTOR, ADJ
93056452	HTEK 38-2 BLK FEEDABLE X-CONNECTOR
93041995	HTEK 38-3 FEEDABLE X-CONNECTOR
93056450	HTEK 39-2 BLK FEEDABLE T-CONNECTOR, R
93041993	HTEK 39-3 FEEDABLE T-CONNECTOR, RIGHT
93056451	HTEK 40-2 BLK FEEDABLE T-CONNECTOR, L
93041994	HTEK 40-3 FEEDABLE T-CONNECTOR, LEFT
93056454	HTEK 41-2 BLK DEAD END
93056441	HTEK 412-1 NAT 12 FT-SURFACE MOUNT TRACK
93056442	HTEK 412-2 BLK 12 FT-SURFACE MOUNT TRACK
93041805	HTEK 412-3 12 FT-SURFACE MOUNT TRACK
93056437	HTEK 44-1 NAT 4FT-SURFACE MOUNT TRACK
93056438	HTEK 44-2 BLK 4FT-SURFACE MOUNT TRACK
93041803	HTEK 44-3 4 FT-SURFACE MOUNT TRACK
93056439	HTEK 48-1 NAT 8 FT-SURFACE MOUNT TRACK
93056440	HTEK 48-2 BLK 8 FT-SURFACE MOUNT TRACK
93041804	HTEK 48-3 8 FT-SURFACE MOUNT TRACK
93034063	HTEK 61/12 HEAVY NIPPLE, 1/8 IPS 1/2IN
93034064	HTEK 61/22 HEAVY NIPPLE 1/8 IPS 3/4IN
93034065	SKB 10-1 NAT CEILING CLAMP
93034066	SKB 10-2 BLK CEILING CLAMP
93034067	SKB 10-3 WHT CEILING CLAMP
93034072	SKB 31 THREADED ROD, 1/4-INCH, 6-FEET
93034073	SKB 34/3M SUSPENSION WIRE, 9-FEET

93034068 SKBT 12-2 BLK T-BAR CEILING CLAMP
93034069 SKBT 12-3 WHT T-BAR CEILING CLAMP
93034070 SKBX 12-2 BLK RECESSED T-BAR CLAMP
93034071 SKBX 12-3 WHT RECESSED T-BAR CLAMP
93034074 SP 4P-2 BLK UNIV. STEM SUSPENSION POINT
93034075 SP 4P-3 WHT UNIV. STEM SUSPENSION POINT
93034076 SPUS 12-2 BLK STEM & CANOPY 3/8IN 12IN
93034077 SPUS 12-3 WHT STEM & CANOPY 3/8IN 12IN
93034078 SPUS 18-2 BLK STEM & CANOPY 3/8IN 18IN
93034079 SPUS 18-3 WHT STEM & CANOPY 3/8IN 18IN
93034080 SPUS 24-2 BLK STEM & CANOPY 3/8IN 24IN
93034081 SPUS 24-3 WHT STEM & CANOPY 3/8IN 24IN
93034082 SPUS 48-2 BLK STEM & CANOPY 3/8IN, 48IN
93034083 SPUS 48-3 WHT STEM & CANOPY 3/8IN 48IN
93034041 TEK 11-2 BLK LIVE END FEED
93034042 TEK 11-3 WHT LIVE END FEED
93034043 TEK 14-2 BLK LIVE CENTER FEED
93034044 TEK 14-3 WHT LIVE CENTER FEED
93034045 TEK 21-2 BLK LINEAR COUPLER
93034046 TEK 21-3 WHT LINEAR COUPLER
93034055 TEK 24-2 BLK ADJUSTABLE CONNECTOR
93034056 TEK 24-3 WHT ADJUSTABLE CONNECTOR
93034047 TEK 34-2 BLK FEEDABLE L-CONNECTOR, ADJ
93034048 TEK 34-3 WHT FEEDABLE L-CONNECTOR, ADJ
93034053 TEK 38-2 BLK FEEDABLE X-CONNECTOR
93034054 TEK 38-3 WHT FEEDABLE X-CONNECTOR
93034049 TEK 39-2 BLK FEEDABLE T-CONNECTOR, R
93034050 TEK 39-3 WHT FEEDABLE T-CONNECTOR, R
93034051 TEK 40-2 BLK FEEDABLE T-CONNECTOR, L
93034052 TEK 40-3 WHT FEEDABLE T-CONNECTOR, L
93034057 TEK 41-2 BLK DEAD END
93034029 TEK 412-1 NAT 12 FT-SURFACE MOUNT TRACK
93034030 TEK 412-2 BLK 12 FT-SURFACE MOUNT TRACK
93034031 TEK 412-3 WHT 12 FT-SURFACE MOUNT TRACK
93034058 TEK 41-3 WHT DEAD END
93033963 TEK 44-1 NAT 4FT-SURFACE MOUNT TRACK
93033964 TEK 44-2 BLK 4FT-SURFACE MOUNT TRACK
93033965 TEK 44-3 WHT 4FT-SURFACE MOUNT TRACK
93034026 TEK 48-1 NAT 8 FT-SURFACE MOUNT TRACK
93034027 TEK 48-2 BLK 8 FT-SURFACE MOUNT TRACK
93034028 TEK 48-3 WHT 8 FT-SURFACE MOUNT TRACK
95011861 TEK-1 NAT ADAPTER
95011862 TEK-2 BLK ADAPTER
95011863 TEK-3 WHT ADAPTER
93034061 XTSA 61/12 NIPPLE, 1/8 IPS, 1/2-INCH
93034062 XTSA 61/22 NIPPLE, 1/8 IPS, 3/4-INCH
93034060 XTSV 12 NAT BENDING TOOL