



Combination Exit / Emergency Light (LUCE SQ Series)



BEFORE YOU BEGIN

Read these instructions completely and carefully.

When using electrical equipment, basic safety precautions should always be followed including the following.



WARNING/AVERTISSEMENT

- Do not use outdoors.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights (MAX: 12ft) where it will not readily be subject to tampering by unauthorized personnel.
- The use of accessory equipment not authorized by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its intended purpose.
- Before wiring to power supply, turn off electricity at fuse or circuit breaker.

IMPORTANT:

- When relamping, only use lamps specified in the exit sign. Using other lamp types may result in transformer damage or unsafe conditions


WARNING:

- This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

Save These Instructions


Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

Ceiling Mounting

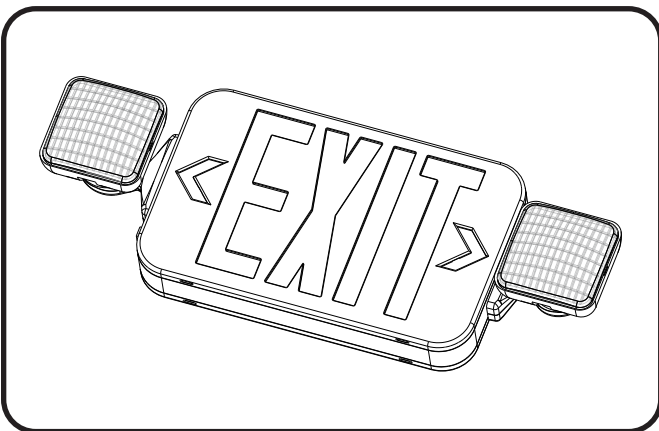

- 1 Connect 20" jumper leads to A.C. input leads in J-box, fasten J-box bracket to J-box. Use Black wire for 120 volt, Red wire for 277 volt, White wire is common.
- 2 Fasten canopy to J-box bracket.
- 3 Snap housing to canopy.
- 4 Connect and trim input leads to socket leads at upper left corner of housing wire channel.
- 5 Secure face plate to housing. Remove the proper arrow as required.

Back Mounting

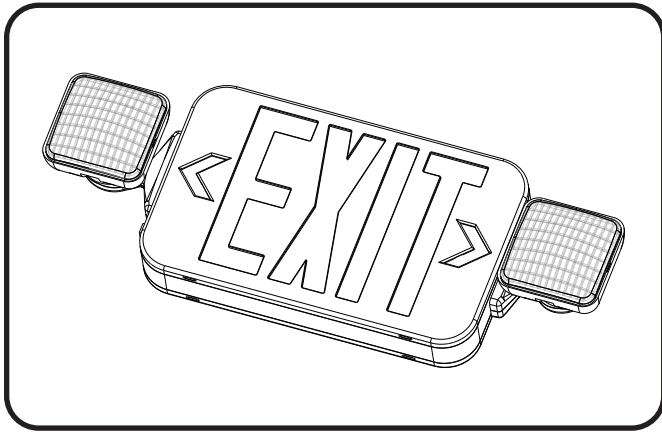


- ① Connect 20 "jumper leads to A.C. input leads in J-box. Use Black wire for 120 volt, Red wire for 277 volt, White wire is common.
- ② Remove necessary knockouts and fasten back cover to J-box.
- ③ Snap housing to back cover.
- ④ Connect and trim input leads to socket leads at upper left corner of housing wire channel.
- ⑤ Secure face plate to housing.


NOTICE:
MUST WEAR GLOVE FOR ALL INSTALLATION PROCESSES

Wiring Diagram

EXIT SIGN

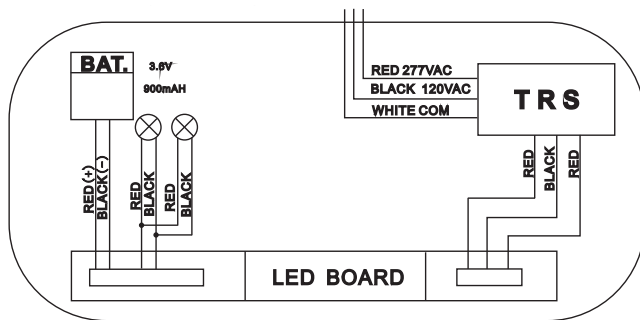

EXIT SIGN WITH REMOTE CAPACITY

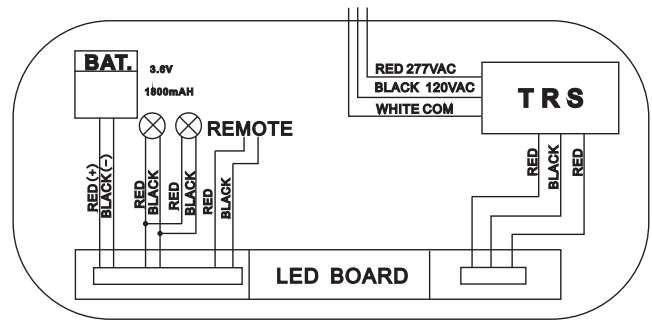

WARNING: UNUSED WIRES MUST BE CAPPED USING
ENCLOSED WIRE NUTS.



RECYCLING INFORMATION

All steel, aluminum, and thermoplastics
parts are recyclable.
All cartons contain recycled materials.
Please recycle responsibly.

Specifications subject to change without notice.