

pier walk



pendant
catenary




Current ©

architectural
arealighting

pier walk


family

The Pierwalk luminaire design complements its surrounding environment. Pierwalk is equally at home in retail shopping areas, apartment/condo complexes or cityscape urban areas. Choose from pendant or catenary mounting for versatile mounting.

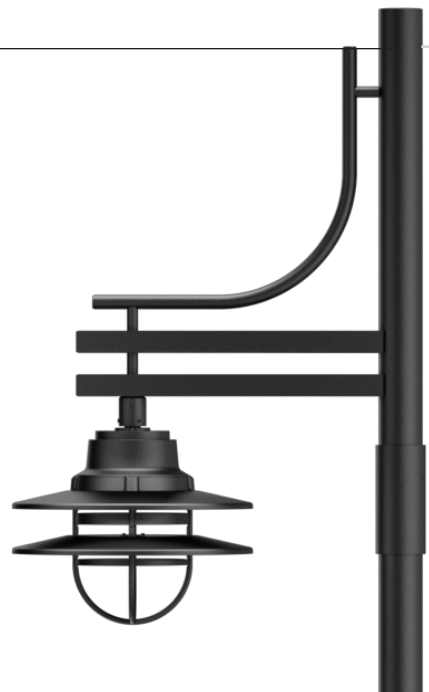

mounting options


This illustration shows a small portion of the configurations that can be accomplished with the slide mounting options and decorative arm pairings.

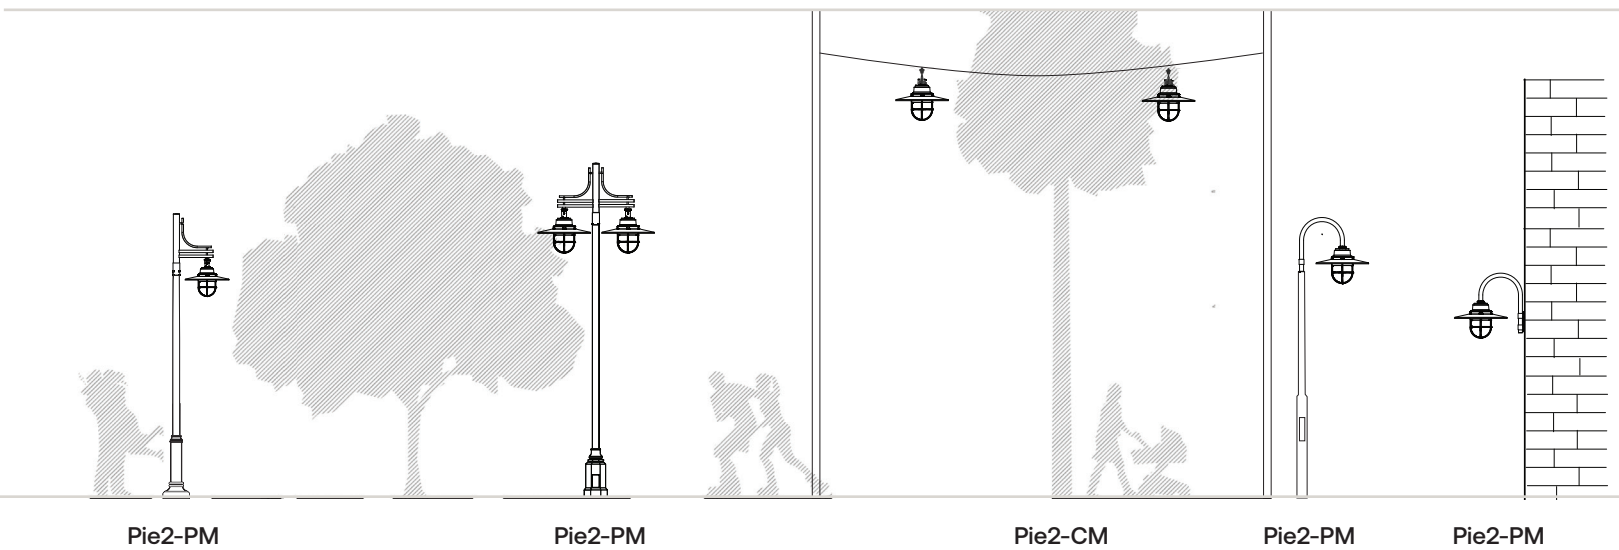

pier walk

pendant

The pendant mount can be integrated onto a variety of decorative arms, giving the luminaire the ability to transform to any setting. The open bottom design also reduces the amount of light lost at nadar, resulting in a higher efficacy product. Decorative cage completes the look integrating into the application environment.

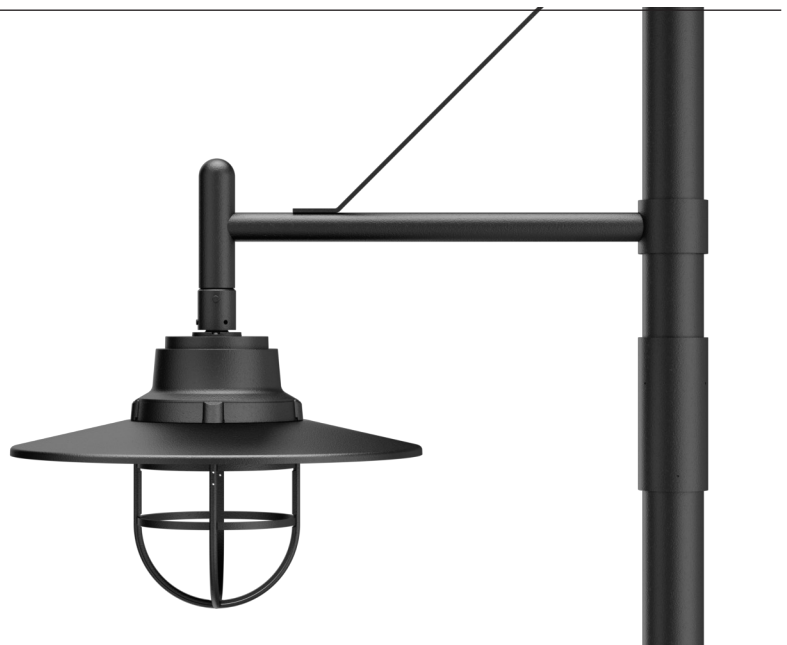



pier walk

catenary

Catenary mounting is the perfect solution for tighter spaces that don't allow for poles. The Pierwalk can utilize a catenary mount in these applications while still adding great performance and a decorative appeal.

(Catenary system by others)





pier walk

shade options

The Pierwalk offers 4 different shade options.



LS Large Shade



SS Small Shade



EQS Equal Shades



UQS Unequal Shades



pier walk

pendant, catenary

mounting applications

Light fixtures play an essential role in both the functionality and aesthetic appeal of a space. Two popular types of light fixture mounts are catenary and pendant. Each has its unique characteristics, applications, and advantages.



pier walk

optical system

Micro Strike optics are one of the optical choices available in the Pierwalk. These optics have been specifically designed to replace HID luminaires with improved uniformity on application. This, combined with the high lumens per watt, makes Micro Strike the perfect choice for the most common applications.

Strike optics are another optic choice that allow for maximized pole spacing, minimal backlight and provide specialty distributions for unique application requirements.

visual comfort

The Strike and Micro Strike optics provide a completely sealed optical bezel meaning you can choose between not having an external lens for the highest efficacy, a frosted acrylic lens for a more diffused appearance.



Front Row Distribution

Concentrated wide pattern provides targeted front row illumination for applications such as automobile dealerships or very narrow drive lanes.



IES Type II Distribution

Wide rectangular pattern for maximizing drive lane applications.




IES Type III Distribution

Wide rectangular distribution with forward throw. Primarily used at the perimeter in conjunction with IES Type V luminaires.




IES Type IV Distribution

Forward throw distribution with optimized pole spacing for perimeter site lighting applications.




IES Type V (Medium) Distribution

Wide/square symmetric distribution for interior site lighting applications.




IES Type V (Narrow) Distribution

Narrow/square symmetric distribution for interior site lighting applications.




IES Type V (Rectangular) Distribution

Narrow/rectangular symmetric distribution for interior site lighting applications.



IES Type V (Wide) Distribution

Wide/round symmetric distribution for interior site lighting applications.



Not all distributions shown, please see spec sheet for full array of optical options.



pier walk

Environmentally Conscious

At Architectural Area Lighting, we do our best to design and manufacture products that are not only beautiful, but functional and efficient. And while efficiency can be measured in lumens per watt, it can also be measured in percentage of light on target. This is achieved through better control of the light in reduction of backlight and up light.

There are also many applications that require amber LEDs to protect the wildlife or environment around the luminaires. For this reason, amber LEDs are also available in the Pierwalk.

No Uplight

With a U0 rating available in every distribution option of the Slide, you have plenty of options to preserve the night sky with and without a shade on this beautiful decorative luminaire. U0 rating only available on configurations without a frosted lens

Backlight Control

High performing asymmetric optics with minimal backlight help to prevent light trespass and redirect that usable light back to the surface you truly want illuminated.


Amber LEDs

Whether they are near an observatory or near the ocean, the Slide can be equipped with amber LEDs for any application. Micro Strike and Strike configurations have this option available in phosphor converted and true amber (595nm), respectively.

pier walk

control options

Outdoor Lighting Control Options

	Control Option Ordering Logic & Description	Control Option Functionality									Control Option Components
		Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height	
Independent	SCP Sensor Control Programmable 8F or 40F	—	—	—	✓	✓	✓	✓	—	8F or 40F	



SCP
Sensor Control
Programmable

AAL offers variety arm and pole options. Please visit www.currentlighting.com/aal for poles and arms offerings. All arms available in single and twin configurations.

pier walk

ordering info

At Architectural Area Lighting, we do our best to design and manufacture products that are not only beautiful, but functional and efficient. And while efficiency can be measured in lumens per watt, it can also be measured in percentage of light on target. This is achieved through better control of the light in reduction of backlight and up light.

Series		Mounting		Distribution			
PIE2		PM	Pendant Mount	80L Only		18L Only	
		CM	Catenary Mount	2	Type 2	2	Type 2
				3	Type 3	3	Type 3
# LED's - Wattage		CCT-CRI		4W	Type 4 Wide	4W	Type 4 Wide
Micro	80L-25	AM *	Amber Monoshromatic	4F	Type 4 Forward	4F	Type 4 Forward
Strike	80L-39	AP **	Amber Phosphor Converted	5QW	Type 5 Square Wide	5QW	Type 5 Square Wide
	80L-50					FR	Front Row
	80L-70	27K8	2700K 80CRI			5W	Type 5 Wide
	80L-90	3K7	3000K 70 CRI			5QN	Type 5 Square Narrow
Strike	18L-15	3K8	3000K 80CRI			5QM	Type 5 Square Medium
	18L-20	35K8	3500K 80CRI			5RW	Type 5 Rectangular
	18L-25	4K7	4000K 70CRI			C	Corner Optic
	18L-30	4K8	4000K 80CRI			TC	Tennis Court
	18L-39	5K7	5000K 70CRI				
	18L-50	5K8	5000K 80CRI				
	18L-70	* 80L only ** 18L only					
Voltage		Options		Shade Options			
UNV (120-277VAC)		BC	Backlight Control	LS	Large Shade		
347V				SS	Small Shade		
480V				EQS	Equal Shade		
				UQS	Unequal Shade		
Photocontrol		Programmed Controls					
PC	Button Photocell	ADD	AutoDim Timer Based Dimming				
		ADT	AutoDim Time of Day Dimming				
		Color		Accessories (Pendant Mount Only)			
BLS	Black Gloss Smooth	LGT	Light Gray Matte Textured	SCP Sensor Control Programmable (view product page)			
BLT	Black Matte Textured	PSS	Platinum Silver Gloss Smooth	Pole accessory is available to provide occupancy detection for outdoor applications meeting California Title 24			
DBS	Dark Bronze Gloss Smooth	VGT	Verde Green Matte Textured	For additional information related to these accessories, please visit currentlighting.com . Options provided for use with integrated sensor, please view specification sheet ordering information table for details.			
DBT	Dark Bronze Matte Textured	WHS	White Gloss Smooth				
GTT	Graphite Matte Textured	WHT	White Matte Textured				
LGS	Light Gray Gloss Smooth	Color Options					
		CC	Custom Color				
		CLA	Clear Anodized Finish				



Current Lighting Solutions, LLC

701 Millennium Blvd.
Greenville, SC 29607

currentlighting.com/AAL

© 2025 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice.
All values are design or typical values when measured under laboratory conditions.