


## INSTALLATION INSTRUCTIONS FOR ENDURA CEILING MOUNTED LED LUMINAIRE

**CAUTION HIGH VOLTAGE**  
LIGHT FIXTURES AND WIRING SHOULD BE  
SERVICED BY A QUALIFIED ELECTRICIAN.

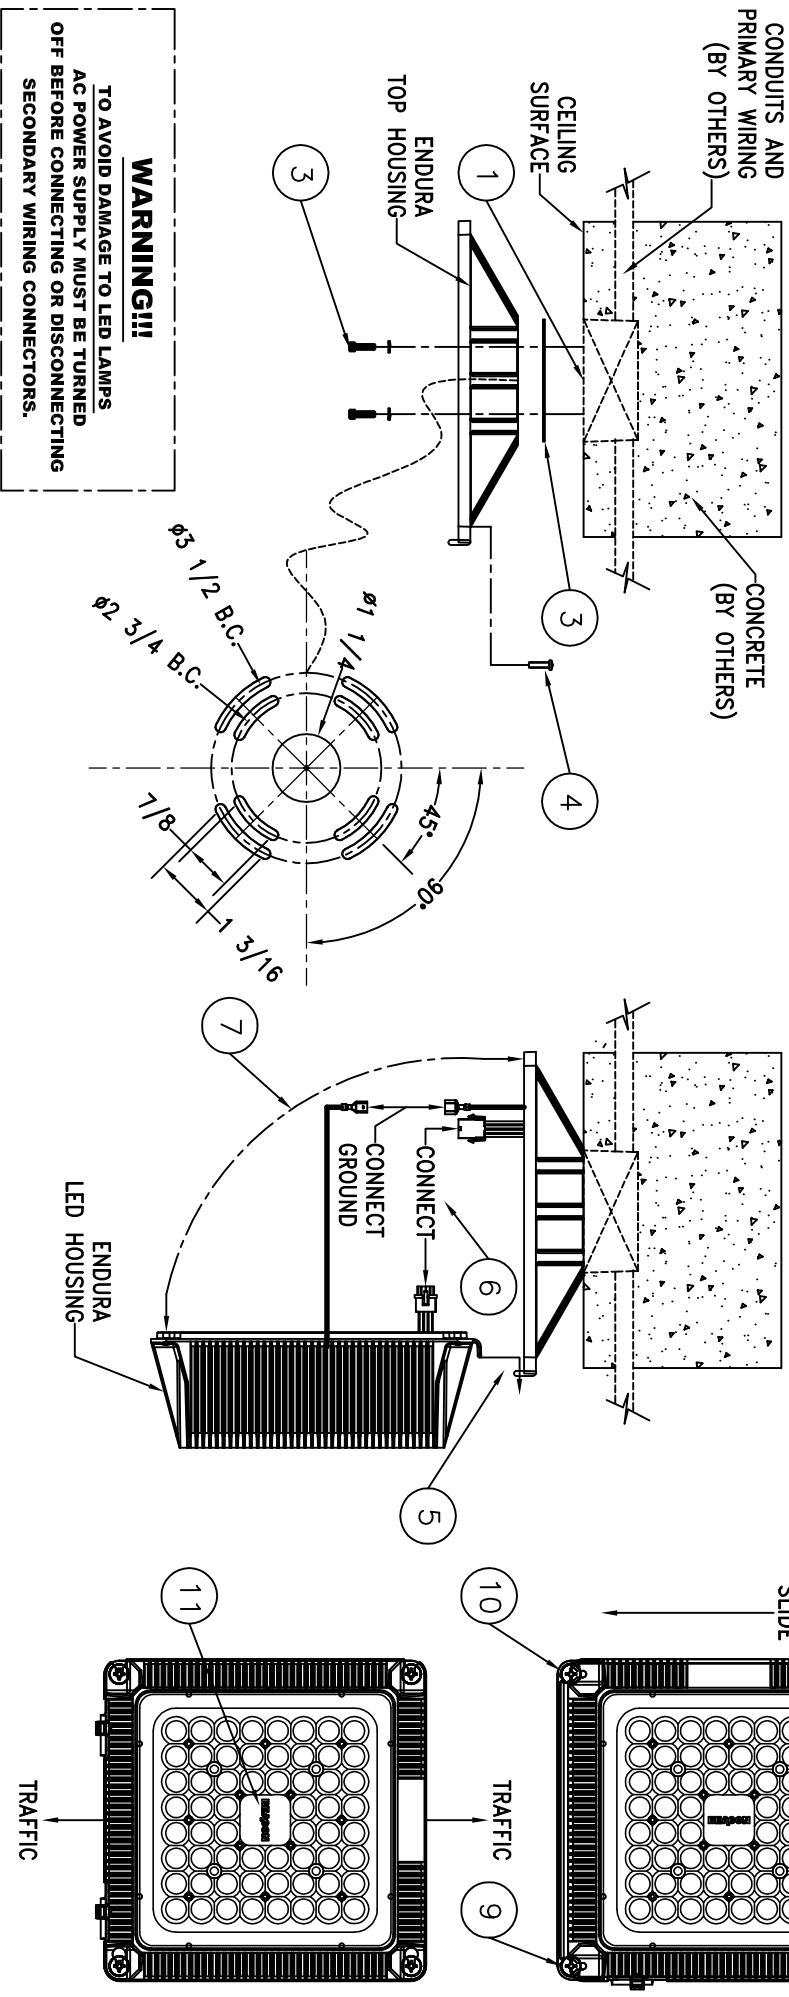

### INSTRUCTIONS:

1. ENSURE THAT POWER SUPPLY IS TURNED OFF
1. CONNECT THE POWER LEADS SUPPLIED ON ENDURA TO THE POWER LEADS IN THE JUNCTION BOX.
2. ATTACH THE TOP HOUSING TO THE JUNCTION BOX USING SCREWS. ASSURE HOUSING IS SQUARE WITH TRAFFIC FOR AESTHETICS.
3. LOCATE J-BOX GASKET (SUPPLIED BY VENDOR) ABOVE TOP HOUSING TO INSURE A DRY JUNCTION BOX.
4. REMOVE THE (2) PHILIPS SCREWS FROM LID NEAR HINGES.
5. SLIDE THE ENDURA LED HOUSING HINGE TABS INTO THE HINGE PINS OF THE TOP HOUSING.
6. CONNECT LED HARNESS CONNECTOR AND GROUND LEAD CONNECTIONS.
7. CLOSE LED HOUSING.
8. SLIDE LED HOUSING TO CAPTURE (2) PHILIPS SCREWS.
9. INSTALL THE SCREWS REMOVED IN STEP 4 IN THE SAME FORMAT AS STEP 8.
10. TIGHTEN SCREWS TO SECURE THE HOUSINGS TOGETHER.
11. NOTE ORIENTATION OF FIXTURE FOR TRAFFIC FLOW. "BEACON" LOGO CAN BE READ IN THE DIRECTION OF TRAFFIC.
12. TURN THE POWER ON AND TEST.