


Product Guide

LED Combination Emergency Exit Sign with Side-Mounted Lamp Heads




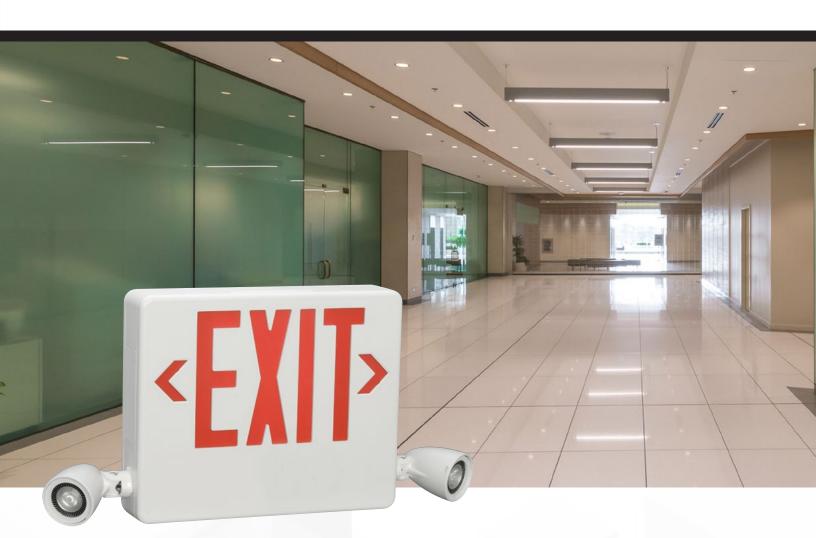


THE HCX SYSTEM



The HCX is a flexible system that provides the best possible solution to emergency lighting situations. With a variety of products controlled from one central source, you can design an effective emergency system that is easy to install and maintain.

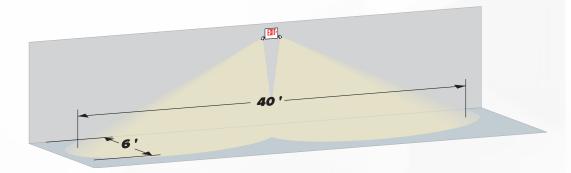

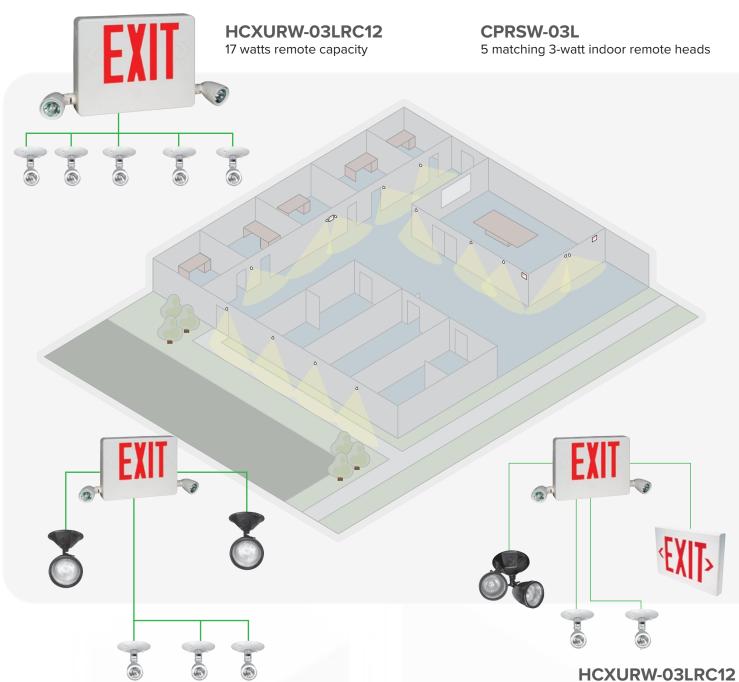

HCXURW-03LRC12

3 matching 3-watt indoor remote heads

2 matching 3-watt outdoor remote heads

17 watts remote capacity

CPRSW-03L

OCRSZ-03L

17 watts remote capacity

CPRSW-03L

2 matching 3-watt indoor remote heads

OCRDZ-03L

1 double 6-watt outdoor remote head

SEURW-DC


1 exit sign with -DC option (4 watt input)




Lighting the Path to Safety

The job of specifying emergency lighting is critical. Every scenario must be considered—the path to safety well-defined. From an interior office to the gathering place outside the building, the occupants' safety is the primary consideration.

Illuminating the path to safety involves more than just designing a product to meet a code requirement. As the most recognized name in the life safety industry, Dual-Lite accepts this challenge when designing products. That's why HCX System components work well together to provide an exceptional yet cost effective pathway illumination arrangement.

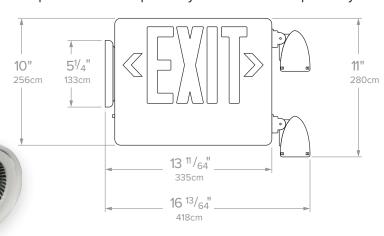



For mounting over doorways with low-ceiling heights, the HCX boasts one of the lowest housing profiles available.

The Installer's Dream

Installing the HCX system is fast and easy. Twist-on fasteners are a thing of the past with the HCX "push-in" wire connectors. Emergency lamps can be easily relocated from side-to-side to facilitate a variety of installations. Housing assembly is a "snap" with no mechanical fasteners. Universal 120/277VAC operation takes out the guesswork of compatibility. The HCX unit is shipped standard with a canopy for ceiling or end mounting.

Conservation – Do Your Part

With energy consumption at only 4.5 watts in standby mode, the HCX system offers considerable energy savings. The System meets CEC T20 requirements, ensuring low operating cost over the life of the product.

Priority One is Safety

The HCX system offers greater visibility in emergency conditions with the high-output MR16 LED lamps, which provide significantly more illumination than incandescent lamps.



Offered in Red or Green letters and White housing



VERSATILE

- Emergency lamp heads with full vertical and horizontal rotation allow precise aiming
- Heads are reconfigurable from one on each side to two on a single side
- Low profile housing allows for mounting over doorways with low ceiling heights; fits nicely in tight areas.
- Shipped standard with all components for universal single/double face installation
- Universal wall/ceiling/end mounting. Mounting canopy included standard

BRIGHT

- Diffuser is spectrally matched to the LED wavelength for uniform and enhanced EXIT letter color
- •MR16 LED lamps provide a significant improvement over comparable wattage incandescent lamps

EFFICIENT

- Advanced LED technology ensures economical operation while maintaining bright even illumination
- Remote capacity models coupled with remote heads offer an extended illumination path powered from a single centralized source
- Maintenance-free battery provides 90-minute emergency operation and never needs water

DURABLE

- Sturdy thermoplastic housing is impact-resistant, UV stable and flame-rated for safety
- Lifetime warranty on LED strip
- Unit components warranty: five full years (excluding battery)
- Battery warranty: 1 year full, 5 years pro-rata

COMPLIANT

- Unit is listed to UL standard 924 (emergency lighting)
- NFPA 101 (Life Safety) Code compliant
- NFPA 70 (National Electrical Code) compliant
- International Building Code (IBC) compliant
- CEC T20 compliant
- OCR outdoor remote heads are UL listed for wet location installation



Standard Models Remote Capacity Letter Color Housing Models

HCXURW-03L		Red	White
HCXUGW-03L		Green	White
	HCXURW-03LRC12	Red	White
	HCXUGW-03LRC12	Green	White

ACCESSORIES (Order Separately)

Wire guard (wall or ceiling mount)

Matching Indoor Remote Heads

CPRSW-03L CPRDW-03L Double Single





Matching Outdoor Remote Heads

OCRSW-03L OCRDW-03L Double



OCRDZ-03L

Double

OCRSB-03L Single Black



OCRDB-03L Double



7

OCRSZ-03L Single





6





Current Lighting Solutions, LLC 701 Millennium Blvd. Greenville, SC 29607

currentlighting.com/dual-lite
© 2022 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Rev 05/24/22 hcx_brochure_R01