


ORDERING GUIDE INDIRECT / DIRECT, DIRECT, OR INDIRECT

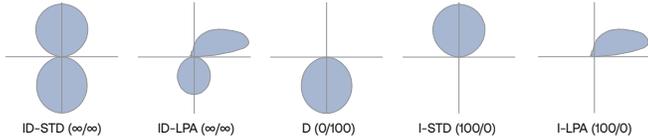

Example: STNC-PL-W-ID-LPA-24-8-SOF-WHS-35K9-I050-D080-D01-2C-UNV

CATALOG # _____

STNC	W							
Series	Profile	Mounting	Fixture Distribution	Indirect Optics ¹	Row Length	Max Length in Row	Direct Diffuser ²	Finish
STNC	PL Plank AR Arc	W Wall	ID Indirect/Direct D Direct (0/100) I Indirect(100/0)	STD Standard LPA Low Peak Angle	' Enter in foot increments	2 2' 3 3' 4 4' 6 6' 8 8'	SOF Soft Diffuse Lens	WHS White, Smooth (C1) GYS Gray, Smooth (C4) BLS Black, Smooth (C5) CC Custom Color

CCT/CRI	Indirect Output ^{1,5}	Direct Output ^{2,5}	Dimming	Circuiting	Voltage
27K9 2700K, 90CRI 30K9 3000K, 90CRI 35K9 3500K, 90CRI 40K9 4000K, 90CRI 50K9 5000K, 90CRI 2765T 2700-6500K Tunable White, 90CRI ^{3,4}	I015 150 (min) to I190 1900 (max)	D015 150 (min) to D190 1900 (max)	D01 1% 0-10V D05 5% 0-10V NDM Non-Dimming LEC 1% Lutron Hi-Lume EcoSystem ³ DALIP DALIP ³ SEN For use with Sensors	1C Single Circuit 2C Dual Circuit (Uplight/Downlight)	UNV Universal (120V-277V) 347 347V ^{3,6}

OPTIONAL

Nightlight	Emergency ⁷	Additional Lensing
NL Nightlight Circuit Required. Enter quantity. 2NL = 2 nightlight circuits/row	EF 10W Emergency Battery Pack (CEC Title 20 Compliant) Enter quantity. 2EF = 2 emergency batteries/row	DCC Clear Acrylic Dust Cover ¹ DCF Frosted Acrylic Dust Cover ¹ VCD Visual Comfort Diffuser ²

Controls & Sensors ^{3,8}	
NX Networked - Wireless⁹	
NXWSM	NX Networked Wireless Enabled Integral NXSMP2-SMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming
NXCS	NX Connect NXC-WIZ20 Wireless Indoor Occupancy and Photocell Sensor
Other	
ODPG	OCC/DLH w Group Philips SNS
ODWG	Wattstopper LMFS-601

Notes:

- Compatible with I or ID distributions.
- Compatible with D or ID distributions.
- Additional lead time may be applicable. Consult factory.
- Must be ordered with D05 dimming.
- Specifiable in 50 lumen increments. Reference the Performance Data Table for full performance offering and exceptions.
- Compatible with D01, D05, NDM, SEN. Excludes EF option.
- EF - 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting.
- Submittal drawings required for row configurations.
- Refer to NX Integrated Controls Reference Table for Functionality of Options.