

LITEFRAME[®] 2.0

FEATURES

- 6" LED lensed wall wash delivering 1000–8000 lumens
- Direct Install from below ceiling for New Construction or Remodel applications
- Optional housing accessories available
- Provides smooth, uniform illumination
- 2700K–5000K, 80+ and 90+ CRI (2 SDCM)
- Dimming protocols include 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem
- NX Lighting Controls wired and wireless controls capability available




SERVICE PROGRAMS

STOCK QS10



CONTROLS TECHNOLOGY



Typical Dimensions and Weights			
Lumen Package	"A" Width Inches (mm)	"B" Height Inches (mm)	Weight lbs (kg)
10L - 35L	7.38 (187)	5.92 (150)	4.6 (2.1)
40L - 50L	7.38 (187)	6.43 (163)	4.8 (2.2)
60L - 80L	7.38 (187)	7.53 (191)	5.4 (2.5)

See DIMENSIONS section for complete details

SPECIFICATIONS

CONSTRUCTION

- Standard Fixture Module designed for Non-IC, Direct Install construction
- Optional Non-IC frame or IC housing available with pre-installed bar hangers
- Die cast aluminum fixture module support ring with spring steel clips for secure mounting to ceiling
- Driver J-Box can be installed and accessed from below the ceiling as direct install or easily snap on to optional housing frame/enclosure
- Light Engine connections use plenum rated (CMP) cable

OPTICS

- Tempered Glass Lens standard
- Provides uniform light distribution down the wall
- High purity, 4 panel aluminum reflector, self-flanged
- Specular or Semi-Specular anodized or White painted cone reflector finish/colors
- Painted flange options in White or Black

ELECTRICAL

- Chip-on-board LED with 2 SDCM
- Multiple CCTs, 80+ or 90+ CRI
- Long LED life: L90 at >50,000 hours (TM-21)
- Universal voltage 120–277V driver, 347V optional
- UL Class 2, inherent short circuit and overload protection
- Flicker-free dimming options in a wide range of protocols from 1% to <0.1% performance
- 0–10V, Phase (Forward/Reverse), DALI, DMX, and Lutron EcoSystem options
- NX Lighting Controls provides options for standalone and networked functionality with wired or wireless connectivity for NX system deployments
- Remote emergency battery option available

INSTALLATION

- Accommodates ceiling thickness from 0.50" to 1.25"
- Fixture Module including driver fully accessible from above or below the ceiling
- 10L–15L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)

CERTIFICATIONS

- cCSAus certified to UL 1598
- For ≥60L: Marked spacing required 36" fixture center to center; 18" fixture center to building member; 0.5" above fixture
- Suitable for wet locations, covered ceiling
- EMR: Certified under UL 924 standard for emergency lighting and power equipment
- EMR: Emergency battery packs are California Energy Commission (CEC) Title 20 Compliant
- Approved for 8 (4 in/4 out) No. 12AWG conductors rated for 90°C through wiring

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	1000–8000
Wattage Range	8–70
Efficacy Range (LPW)	102–114
Reported Life (Hours)	L90 / >50,000
Input Current (mA)	66–583 (120V)

*Based on Specular, 35K, 80 CRI

LFR-6SQW

LITEFRAME 6" SQUARE LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Gray Shading = Service Program

STOCK **QS10**
Limit of 150 Luminaries

ORDERING GUIDE

Example: LFR-6SQW-M-10L35K8-LWW-DM1 / LFR-6SQW-LWW-S / LFR-6SQD-H

CATALOG #

FIXTURE MODULE

LFR-6SQW-M								
Ap/Shp/Funct	Lumen Output	CCT	CRI	Distribution	Driver Options	Control Options	Voltage	Module Options
LFR-6SQW-M 6" Square Lensed Wall Wash Fixture Module for Direct Install (Non-IC frame or IC housing available under Housing Options below)	10L 1000 15L 1500 20L 2000 25L 2500 30L 3000 35L 3500 40L 4000 50L 5000 60L 6000 ¹ 70L 7000 ¹ 80L 8000 ¹	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	8 80+ 9 90+	LWW Lensed Wall Wash	DM1 0–10V Dimming to 1% DM01 0–10V Dimming to < 1% ² PDM Phase (Forward/ Reverse) Dimming to 1% ² DMX DMX with RDM dimming to < 0.1% ² DALI DALI Dimming to 1% ² EDM Lutron Hi-Lume EcoSystem Dimming to 1% ²	NX Lighting Controls Networked Wireless NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ³ Networked Wired NXE NX Wired Dual RJ45 SmartPORTS, without Sensor ³	Standard 120–277V 34 347V ⁴	CP Chicago Plenum ^{5,6} EMR 6W Emergency Battery Pack (CEC Title 20 Compliant) with remote test switch and indicator light ⁶ DTS Device Transfer Switch with Dimming Bypass ^{6,7}

TRIM (Ships separately)

LFR-6SQW-T				
Aperture/Shape/Function	Distribution	Reflector Finish/Color	Flange Color Options	Lower Trim Options
LFR-6SQW-T 6" Square Lensed Wall Wash Trim Assembly	LWW Lensed Wall Wash	S Specular SS Semi-Specular WC Painted White Cone and Flange	Standard matches reflector color WT White Flange ⁸ BT Black Flange	FM Flush Mount Flange ¹¹

HOUSING OPTIONS (Ships separately)



Aperture/Shape/Function
<input type="checkbox"/> LFR-6SQD-H 6" Housing Frame, New Construction, Non-IC
<input type="checkbox"/> LFR-6SQD-H-IC 6" Housing Enclosure, New Construction, IC Rated ^{9,10}

Accessories
<input type="checkbox"/> LiteGear LiteGear® Inverter, 125VA–250VA
<input type="checkbox"/> LPS Series LightPower Micro-Inverter, 20VA–55VA
<input type="checkbox"/> LF-FMR6-SQ Flush Mount Mud-in Ring, 6" Square ¹¹
<input type="checkbox"/> LF-MOR6-SQ-WH Metal Oversized Ring, 6" Square, White (10.3" outside dimension)

Notes:

- 60L and 80L require marked spacing. See line art for more details.
- DM01, PDM, DMX, DALI available up to 50L. EDM available 15L–40L.
- NX requires DM1 driver option.
- 347V requires DM1 driver option; Available 10L–40L; not available with Controls, DTS, EMR.
- CP not available with PDM, DMX, or Controls.
- Module options not available in combination.
- DTS available with DM1, DM01, or DALI.
- WT not needed for WC.
- IC available up to 35L; 10L–15L Fixture Modules are inherently protected IC without the use of IC housing enclosure. (IC housing is still recommended when using loose-fill or spray foam insulation types.)
- IC Housing not for use in combination with Controls or with Module Options CP, EMR, DTS.
- Flush Mount Flange requires FMR accessory (sold separately).

NX LIGHTING CONTROLS

Control Option Ordering Logic & Description			Control Option Functionality								Control Option Components	
			Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming		
NX Wireless	NXW	NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	✓	✓	✓	-	-	✓	✓	✓		NXRM2-H
NX Wired	NXE	NX Wired Dual RJ45 SmartPORTS, without Sensor	✓	✓	✓	-	-	✓	✓	✓ ¹		NXDSP

¹ Requires NXBTC, order separately.

NX LIGHTING CONTROLS APP



The NX Lighting Controls App is a free to use mobile application for programming both an NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enabled luminaires and program your NX system settings.



Android



Apple iOS

PERFORMANCE DATA TABLE


Performance data provided below is for 3500K, 80 CRI with Specular Clear reflector finish/color

Lumen Package	Nominal Lumens	Distribution	Delivered Lumens	Watts	LPW
10L	1000	Lensed Wall Wash	847	7.5	114
15L	1500		1296	11.4	114
20L	2000		1654	14.5	114
25L	2500		2164	19.4	111
30L	3000		2643	24.2	109
35L	3500		3093	28.9	107
40L	4000		3483	32.3	108
50L	5000		4329	41.9	103
60L	6000		5318	49.5	107
70L	7000		6210	59.0	105
80L	8000		7100	69.2	103

DIMENSIONS

LFR-6SQW-M

Fixture Module consists of Light Engine and Driver J-Box assemblies.
Overall dimensions for each are dependent upon configuration selected.
See the following pages for details.

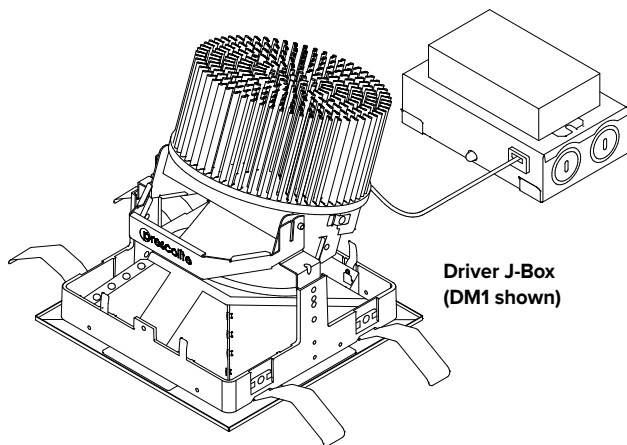

**Light Engine
with Trim assembly installed**

DIMENSIONAL DATA		
APERTURE		□ 6.00" (152.4mm)
FLANGE WIDTH	Standard	0.69" (17.5mm)
	Flush Mount	0.20" (5.1mm)
FLANGE TO FLANGE	Standard	□ 7.38" (187.4mm)
	Flush Mount	□ 6.40" (162.6mm)
CEILING CUTOUT	Standard	□ 6.75" (171.5mm)
	Flush Mount	□ 6.88" (174.7mm)
CEILING THICKNESS		0.50" – 2.50" (12.7 – 63.5mm)


LFR-6SQW LIGHT ENGINE

OVERALL LIGHT ENGINE HEIGHT "A" *		
LUMEN PACKAGE	FIXTURE MODULE	BEAM DISTRIBUTION
		LWW
10L–35L	STANDARD	5.92" (150.3mm)
	CP	8.68" (220.5mm)
40L–50L	STANDARD	6.43" (163.3mm)
	CP	8.68" (220.5mm)
60L–80L	STANDARD	7.54" (191.5mm)
	CP	8.68" (220.5mm)

* Note: Add ½" minimum plenum clearance above overall Light Engine Height.


** For ≥60L: Marked spacing required 36" fixture center to center; 18" fixture center to building member; 0.5" above fixture.

*** Non-IC rating requires 3" from insulation and combustible materials.

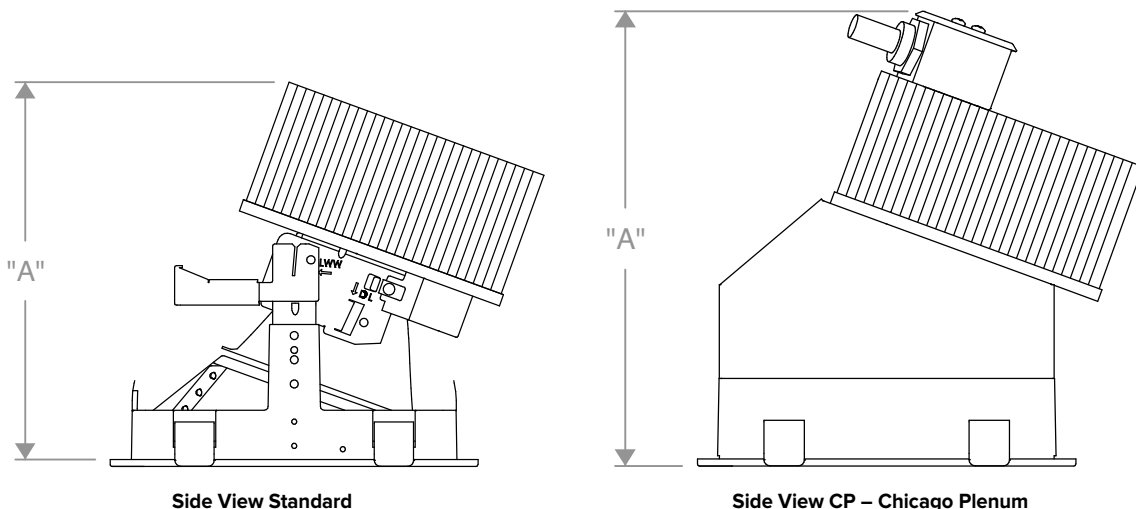


DIMENSIONS CONTINUED


DRIVER J-BOX

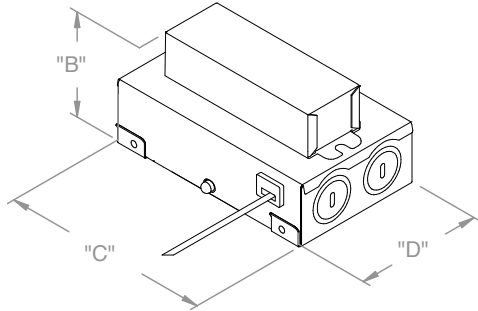


DM1 / DM01 / PDM / DALI

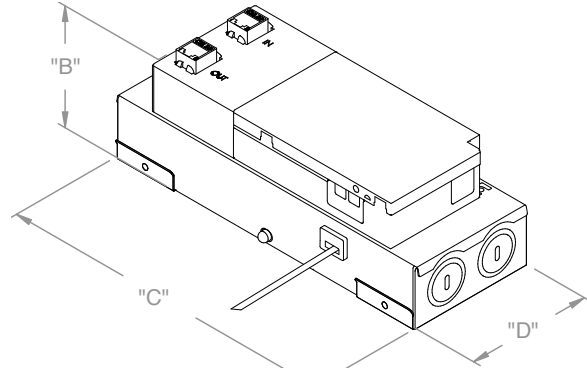


DMX

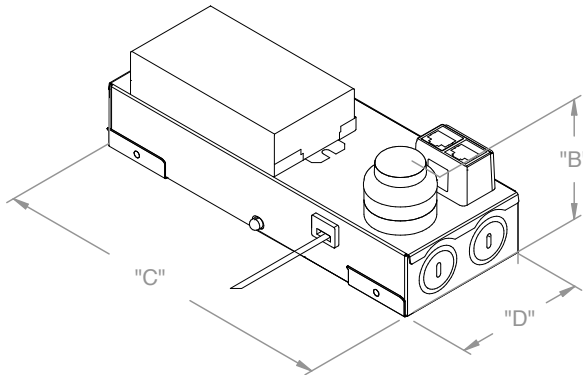

NX CONTROLS OPTION

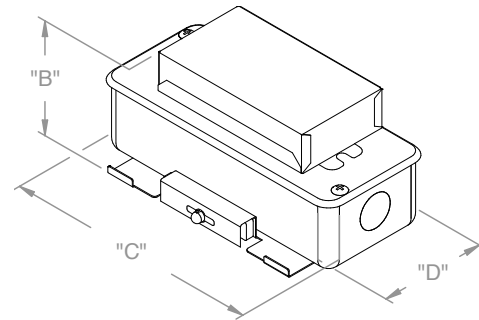

CP

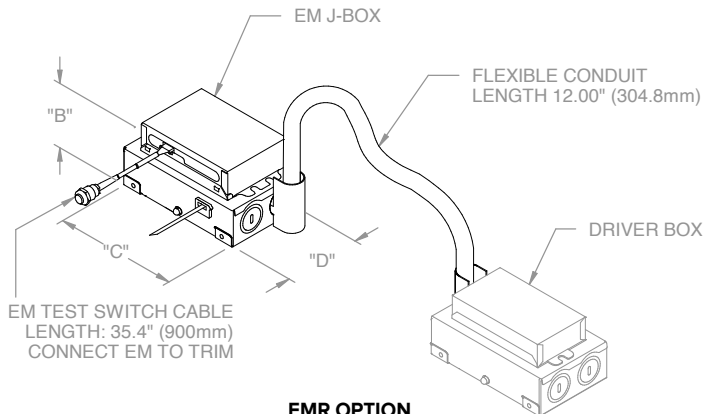

EMR OPTION

EMR/Driver J-Box Conduit (provided) connects to Driver J-Box
(see Driver J-Box for additional details)



OVERALL DRIVER J-BOX DIMENSIONS (ALL LUMEN OUTPUTS)				
DRIVER/ CONTROLS /OPTIONS	"B" (HEIGHT)	"C" (LENGTH)	"D" (WIDTH)	MINIMUM J-BOX PLENUM CLEARANCE
DM1 / DM01 / PDM / DALI	2.67" (67.8mm)	5.34" (135.6mm)	3.23" (82.0mm)	3.00" (76.2mm)
DMX	3.07" (78.0mm)	8.68" (220.5mm)	3.23" (82.0mm)	3.50" (88.9mm)
NX	3.02" (76.7mm)	8.68" (220.5mm)	3.23" (82.0mm)	3.75" (95.3mm)
EMR	2.73" (69.3mm)	5.34" (135.6mm)	3.23" (82.0mm)	3.00" (76.2mm)
CP	1.89" (73.4mm)	6.50" (165.1mm)	2.72" (69.1mm)	3.00" (76.2mm)

LFR-6SQW



LITEFRAME 6" SQUARE LENSED WALL WASH

DIMENSIONS CONTINUED


OPTIONAL HOUSINGS

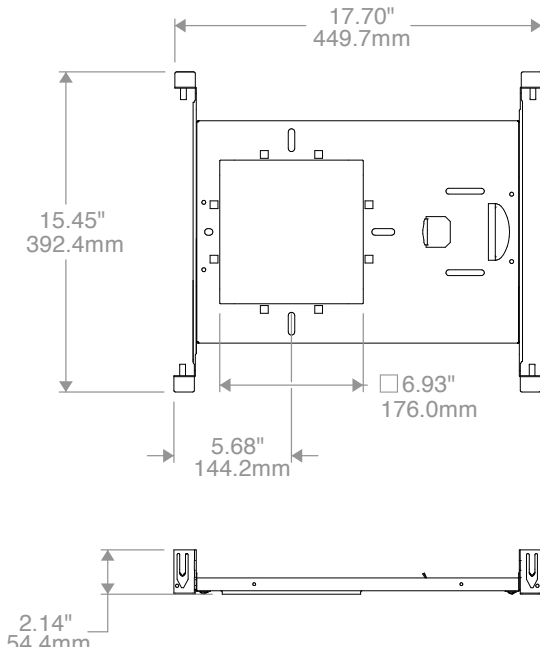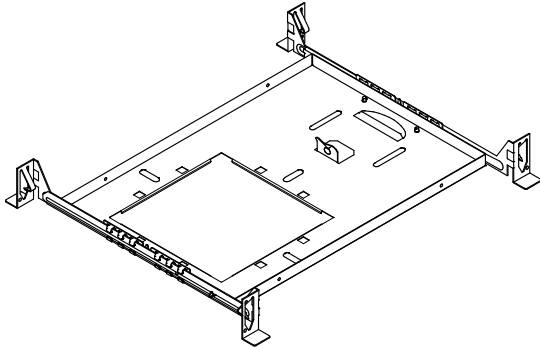


LFR-6SQD-H
NON-IC HOUSING FRAME

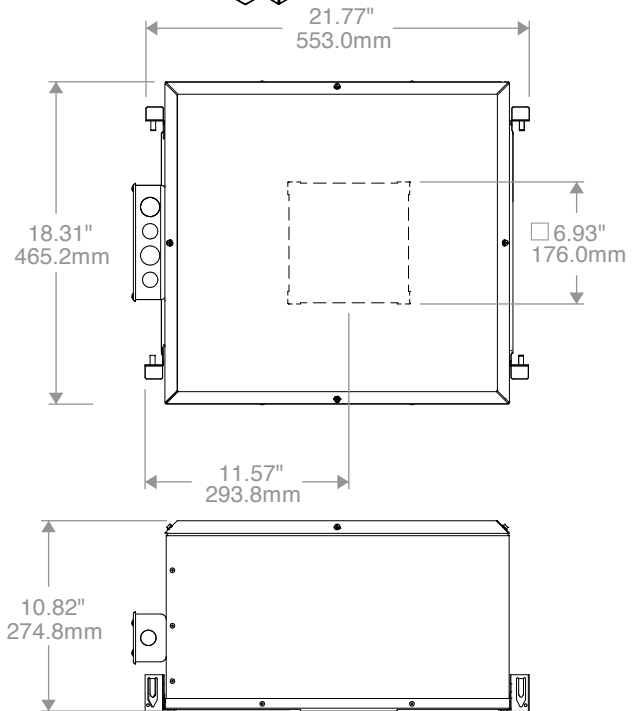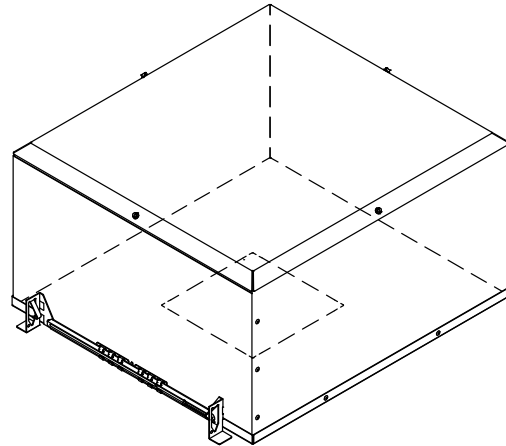

LFR-6SQD-H-IC
IC HOUSING
Not for use with CP Shroud

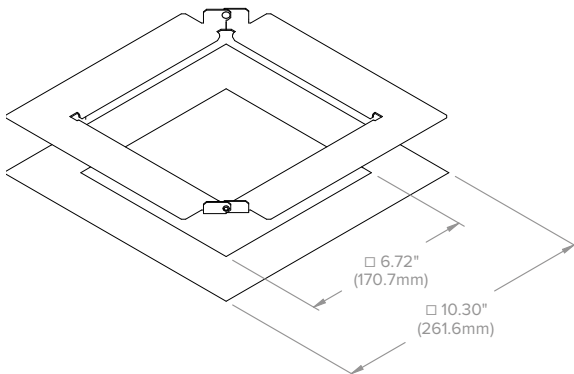

LF-MOR6-SQ
METAL OVERSIZED RING
(See LF-MOR Installation Instruction for more details)

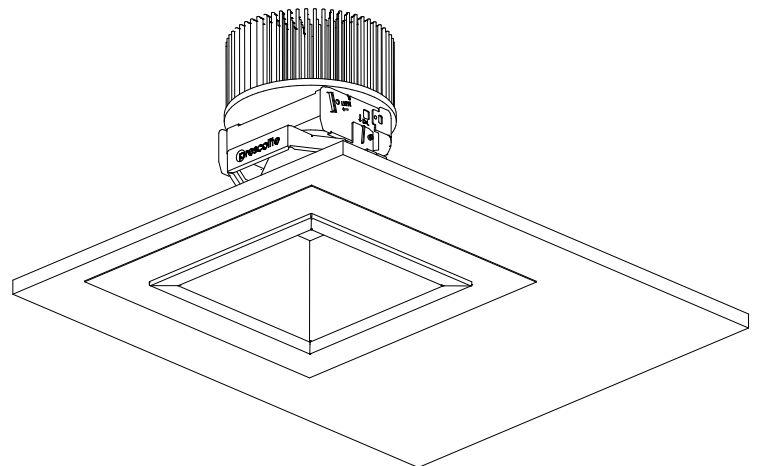

LFR-6SQW

LITEFRAME 6" SQUARE LENSED WALL WASH

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


PHOTOMETRY

LFR-6SQW-M-20L35K8LWW-DM1 / LFR-6SQW-T-LWW-S

LUMINAIRE DATA

Test No.	22.00824
Description	2000 lm, Very Narrow, 3500K, 80 CRI
Delivered Lumens	1654
Watts	14.5W
Efficacy	114
Mounting	Recessed/Ceiling
Beam Angle (FWHM)	57

POLAR GRAPH

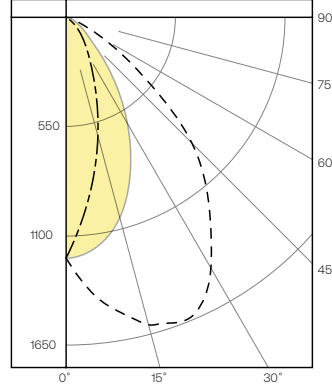

CANDELA DISTRIBUTION

Degree	Candela
0	1210
5	1384
15	1600
25	1598
35	1267
45	896
55	355
65	92
75	18
85	0
90	0

LUMINANCE DATA*

Vertical Angle	Average
45°	54557
55°	26648
65°	9373
75°	2994
85°	0

*Candela/Square Meter

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	1186	71.7
0-60	1602	96.9
0-90	1654	100.0
0-180	1654	100.0


LUMEN MULTIPLIER

Option	27K8	30K8	35K8	40K8	50K8	27K9	30K9	35K9	40K9	50K9
Multiplier	0.93	0.96	1.00	1.01	1.03	0.78	0.82	0.85	0.87	0.89

Photometrics are published below at a nominal 3500 Kelvin, 80+ CRI. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

TM-30 DATA

COLOR VECTOR GRAPHIC 3500K, 90 CRI




— Reference Illuminant — Test Source

COLOR DISTORTION GRAPHIC 3500K, 90 CRI



TEST RESULTS - 3500K		
Value	80+ CRI	90+ CRI
R _t	85	90
R _g	95	99
CCT (K)	3422	3416
D _{uv}	-0.0008	-0.0019
x	0.4089	0.408
y	0.3906	0.3877
CIE R _a	85	93
CIE R _g	16	66

COLOR VECTOR GRAPHIC 3500K, 80 CRI



— Reference Illuminant — Test Source

COLOR DISTORTION GRAPHIC 3500K, 80 CRI



ELECTRICAL DATA

DRIVER DATA		
Input Voltage	120–277 V	347 V
Input Frequency	50/60 Hz	50/60 Hz
Power Factor	≥0.90	≥0.90
THD	<20%	<20%
EMI Filtering (FCC 47 CFR Part 15)	Class A	Class A

* Values for DM1 option shown, values for other dimming options may vary.

ADDITIONAL INFORMATION

Dimming Compatibility

For more details and recommended dimmer list, see Dimming Compatibility Information on currentlighting.com/prescolite.

DMX

See instruction sheet on currentlighting.com/prescolite for connection & installation information.

Central Inverters

For full fixture output in back-up mode, we recommend you visit currentlighting.com/dual-lite for your Central Lighting Inverter options. Please contact your local Current representative for any assistance with proper sizing and loading of your inverter selection. Central lighting inverters must be ordered separately.

Lumen Output in Emergency Mode

To determine the lumen output in emergency mode, multiply the battery pack wattage by the fixture lumens per watt (LPW). For example, 6W x 120 LPW = 720 lumens in emergency mode.