





| | Λ | | |
|---|---|---|--|
| / | ı | \ | |


WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.

KEEP THIS SHEET FOR FUTURE REFERENCE.

| | | - FI - DI - L O - L : | _ TI 10 I I |
|-----------------|-------------------|--------------------------|------------------|
| Tools Required: | I B" Allen Wrench | ☐ Flat Blade Screwdriver | ☐ Thread Sealant |

Installation Instructions:

- 1. Dig hole to obtain desired mounting height and adequate strength for local soil conditions.
- 2. Route conduit as required. Inside diameter of stanchion is 2L" inches and will accommodate up to two L" conduits.
- 3. Embed stanchion directly into concrete.
- 4. /! Make certain the electrical supply is OFF.
- 5. Loosen -- do not remove -- flat head screw in center of handhole cover and remove cover.
- 6. Before mounting fixture, coat K" NPSM mounting threads with a thread sealant to keep moisture from entering a. Box.
- 7. Attach fixture per fixture installation instruction sheet using extreme care not to damage threads when screwing fixture onto Stanchion Mount.
- 8. Tighten locking screw inside handhole to prevent fixture rotation.
- 9. Make certain stanchion ground wire is connected to circuit ground.
- 10. Make wiring connections observing polarity, i.e.; white-to-common & black-to-voltage.
- 11. Replace handhole cover and tighten screw.

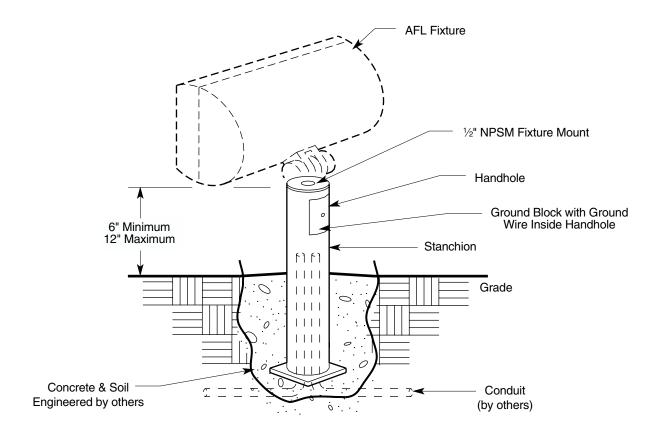





Stanchion Mount for Single Fixture Installation Instructions



KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

General Product Limited Warranty Coverage: All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

Auxiliary Equipment: All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

⚠ Copper and Bronze Landscape Components: Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 25 years from date of sale.

Composite In-Grade Components: Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Aluminum Landscape Components: Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

Limit of Liability and General Conditions: Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.

Howmayweserveyoubetter? Pleaseletusknow. Visitourwebsiteat: currentlighting.com/kimlighting Yourconcernsareimportanttous.

