

CUC

UNDER CABINET LUMINAIRE

NOTE: Components shown in images are representative only and may vary based on the configuration ordered.

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

- READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
- Do not use outdoors (this item may be omitted if the product is suitable for outdoor use).
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than intended use.

WARNINGS

- This product contains chemicals known to the state of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.
- Contact Current Lighting for information and direction before relamping or replacing this light fixture.
- Disconnect power before installing or servicing. Observe all precautions usually followed when dealing with high voltage equipment when installing or servicing this light fixture.
- The product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Protect all wiring connections with approved insulators rated 600V / 150°C (by others).
- Selected fixture voltage must match supply line voltage.


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Upon receipt of this fixture, thoroughly inspect it for any damage. If any is found, the carrier should be notified and held accountable.

HARD WIRING INSTRUCTIONS


STEP 1

Remove screws (detail A) to access wiring.

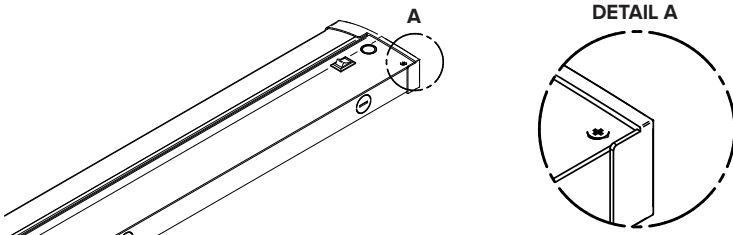

STEP 2

Open driver cover. Remove knockout and install supplied fitting.

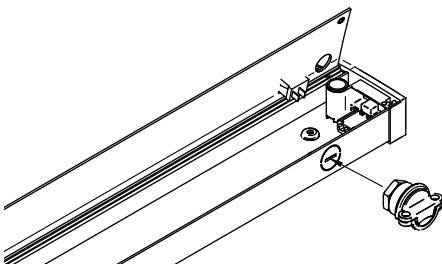


CUC

UNDER CABINET LUMINAIRE


STEP 3

Make wiring connections per diagram.

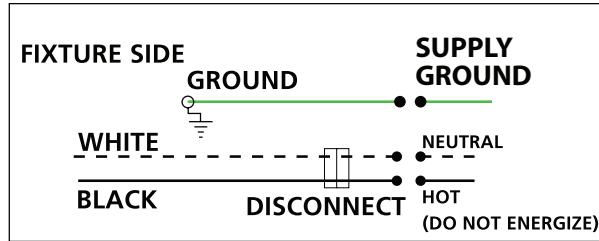


STEP 4

Close driver cover and replace screws. Secure luminaire using provided mounting screws.

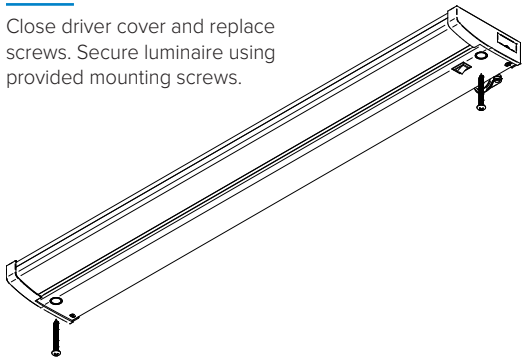

STEP 5


Use switches on fixture to power on and set desired color temperature.

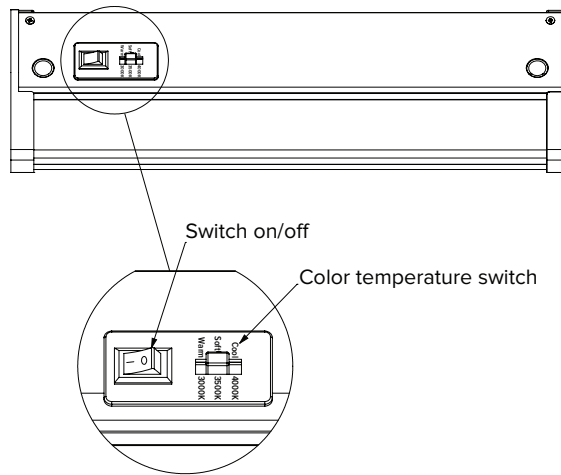

LINKING INSTRUCTIONS


STEP 1

Remove end cap.

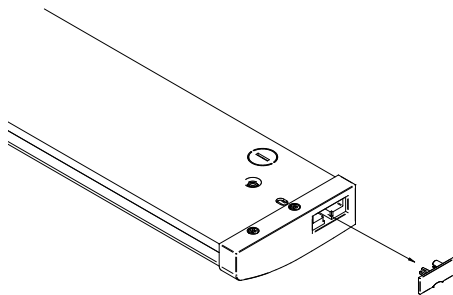


STEP 2

Install supplied connector by pressing in.

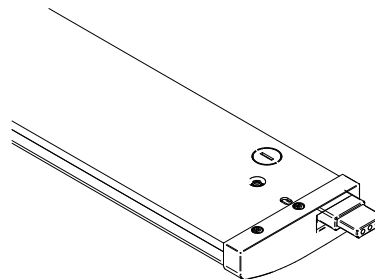

STEP 3

Install mating fixture; make sure that the connection is fully seated.

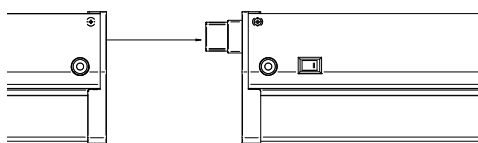

Note: Accessory linking cables and cord/plug may be ordered separately.