

NOTE: Components shown in images are representative only and may vary based on the configuration ordered.

CAUTION! — READ THIS FIRST — IMPORTANT SAFETY INSTRUCTIONS

- Carefully read the instructions pertaining to your fixture. If you have any questions regarding the proper installation or local codes, consult a qualified electrician.
- To avoid shock hazard, do not work with live electrical wires.
- Install and wire the fixture in locations in compliance with the National Electric Code and any local codes.


WARNING: This product must be installed in accordance with the applicable installation code by a person familiar with the constructions and operation of the product and the hazards involved.

WARNING: Risk of fire, minimum of 90°C supply conductor. Consult a qualified electrician to ensure correct branch circuit conductor.

WARNING: To avoid shock hazard, disconnect the power at the panel board (circuit breaker box) before beginning installation.


STEP 1

Align fixture to ceiling grid. Cross tees may need to be trimmed when fixtures are installed in certain applications. For instance when installing a 2x4 recessed troffer into a 2x2 ceiling grid the cross tees would need to be trimmed or a zero clearance cross tee utilized.

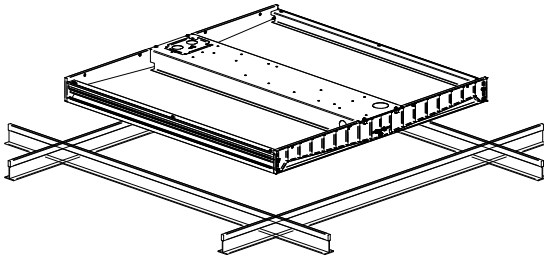

STEP 2

Lay fixture into grid. Attach included T-bar clips to endcaps with the provided screws.

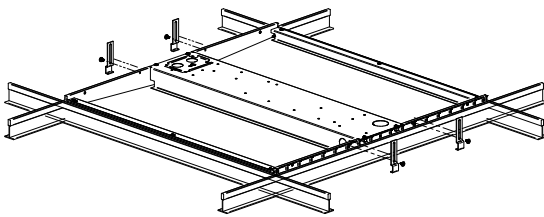

STEP 3

Open access plate and make electrical connections using appropriate fittings.

