


Lumination


PCL

Volumetric Center Lens

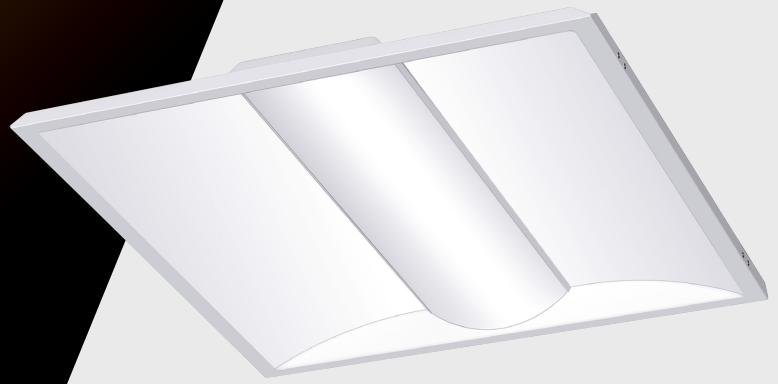

Slim, Low Profile

Ultra thin and nonobstructive profile promoting a clean design aesthetic.

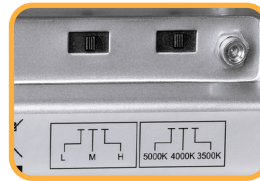

Field Selectable

Integral Lumen and CCT switches allow for color temperature and lumen output adjustments to be made in the field at the user's discretion.

Clean Ceilings Without Breaking the Bank

The Lumination™ PCL series is an LED contractor grade volumetric, center lens luminaire with selectable lumens and CCT. Suitable for indoor general lighting in both new construction and retrofit solutions.

Size: 2x2, 2x4
Lens: Frosted Polypropylene
Color Temp: **2x2** 3250/3750/5000 lumens (Field Selectable)
2x4 3750/5000/6000 lumens (Field Selectable)
CRI: 80+
Lumen Output: 2750 - 5700lm

Efficacy: **2x2** Up to 149 LPW
2x4 Up to 157 LPW
Dimming: Standard 0-10VDC, 1%
Voltage: 120-347V
Ratings: Insulation Contact: Type IC Rated, Damp Location rated, CSA Certified
Mounting: Integral T-Bar clips for grid ceiling. Flange and Surface Mount Kits available



Want to Learn More?

For Specific product technical questions, contact: lightingproinfo@currentlighting.com