



Combination Exit / Emergency Light (LUCE Series)



BEFORE YOU BEGIN

Read these instructions completely and carefully.

When using electrical equipment, basic safety precautions should always be followed including the following.



WARNING/AVERTISSEMENT

- Do not let power supply cords touch hot surfaces.
- Do not use outdoors.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights (MAX: 12ft) where it will not readily be subject to tampering by unauthorized personnel.
- The use of accessory equipment not authorized by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its intended purpose.
- Servicing of this equipment should be performed by qualified service personnel.
- Before wiring to power supply, turn off electricity at fuse or circuit breaker.

INSTALLER:

See unit label for additional model specifications.

WARNING:

- This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

Save These Instructions

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

Ceiling Mounting



- 1 Connect 20" jumper leads to A.C. input leads in J-box, fasten J-box bracket to J-box. Use Black wire for 120 volt, Red wire for 277 volt, White wire is common.
- 2 Fasten canopy to J-box bracket.
- 3 Snap housing to canopy.
- 4 Connect and trim input leads to socket leads at upper left corner of housing wire channel.
- 5 Secure face plate to housing. Remove the proper arrow as required.

Back Mounting




- ① Connect 20" jumper leads to A.C. input leads in J-box, fasten J-box bracket to J-box. Use Black wire for 120 volt, Red wire for 277 volt, White wire is common.
- ② Remove necessary knockouts and fasten back cover to J-box.
- ③ Snap housing to back cover.
- ④ Connect and trim input leads to socket leads at upper left corner of housing wire channel.
- ⑤ Secure face plate to housing.


NOTICE:
MUST WEAR GLOVE FOR ALL INSTALLATION PROCESSES

Wiring Diagram

COMBINATION EXIT

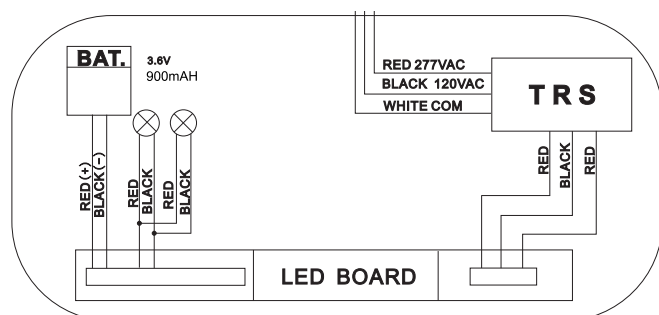

COMBINATION EXIT WITH REMOTE CAPACITY

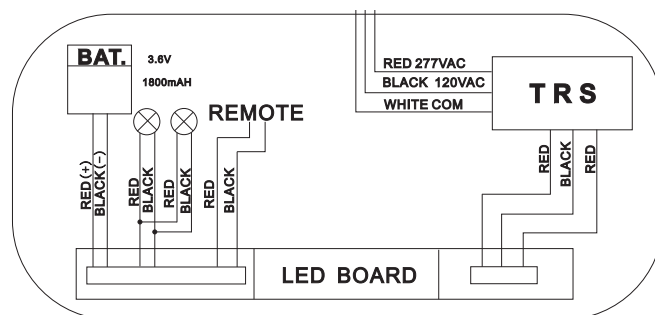

WARNING: UNUSED WIRES MUST BE CAPPED USING ENCLOSED WIRE NUTS.

**RECYCLING INFORMATION**

All steel, aluminum, and thermoplastics parts are recyclable.
All cartons contain recycled materials.
Please recycle responsibly.

Specifications subject to change without notice.