

LED Emergency Light (LUMEL Series)



BEFORE YOU BEGIN

Read these instructions completely and carefully. When using electrical equipment, basic safety precautions should always be followed including the following.

WARNING/AVERTISSEMENT

- Do not let power supply cords touch hot surfaces.
- Do not mount near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not readily be subject to tampering by unauthorized personnel.
- The use of accessory equipment not authorized by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its inteded purpose.
- · Servicing of this equipment should be performed by qualified service personnel.
- Do not use outdoors.
- Man Mounting Height: 9ft.
- **INSTALLER:**
- · See unit label for additional model specifications
- WARNING:
- This product contains chemicals known to the State of California to cause cancer, birth defects and/or other reproductive harm. Thoroughly
 wash hands after installing, handling, cleaning, or otherwise touching this product.

Save These Instructions

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.




Installation - J-box Mounting





Feed fixture leads through main bottom case and connect AC power supply.

Connect wires through the J-Box. Main bottom case on the J-Box and secure with screws.

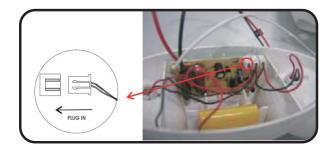

(2	
()	1

Connect battery before continuous AC power can be provided to the unit.




4

Align snaps and push housing directly onto main bottom case. Apply continuous AC power and press "TEST" button to check light.

Installation - Conduit

(1)

Secure main bottom case to wall surface. Route wires through hole in conduit flange and make conduit connection.

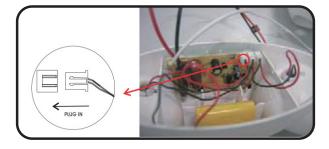



Connect battery before continuous AC power can be provided to the unit.





Align snaps and push housing directly onto main bottom case. Apply continuous AC power and press "TEST" button to check light.


WARNING:

Unused wires must be capped using enclosed wire nuts.


Current 🗐

LED.com

Wiring Diagram for LED Emergency Light

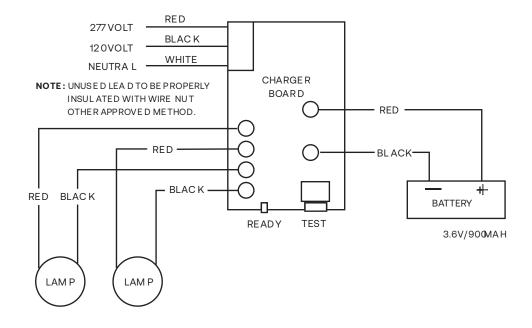

Wiring Diagram for LED Emergency Light with Remote Capacity

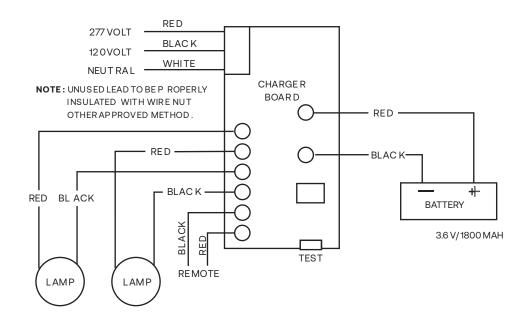

Operation

1

2

During an electrical power failure, the lamps will automatically come on for a minimum of 90 minutes.

To test, depress the "TEST" switch. The emergency lamps will illuminate. When the switch is released, the lamps will go off.



Specifications subject to change without notice.