





**STANDARD WORK TO ADD BAR
HANGERS TO HOUSING**



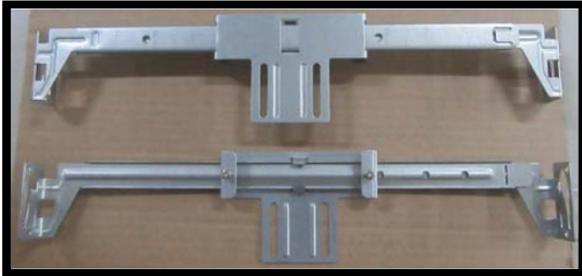

Ensure all parts are available

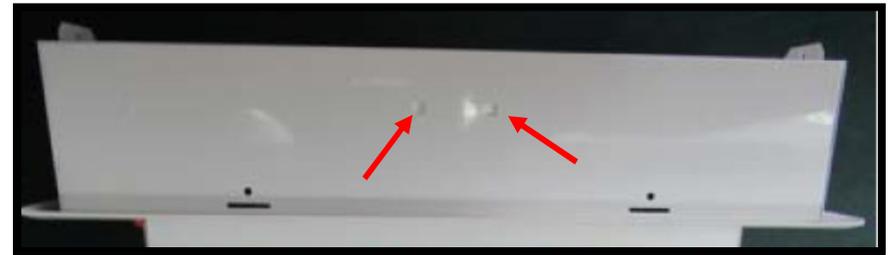

Identify the knockouts on both sides of the housing




Using a Philips screwdriver or some other sharp tool, punch out the knockouts creating holes






Place the bar hanger on the housing and align the bracket with the newly created holes

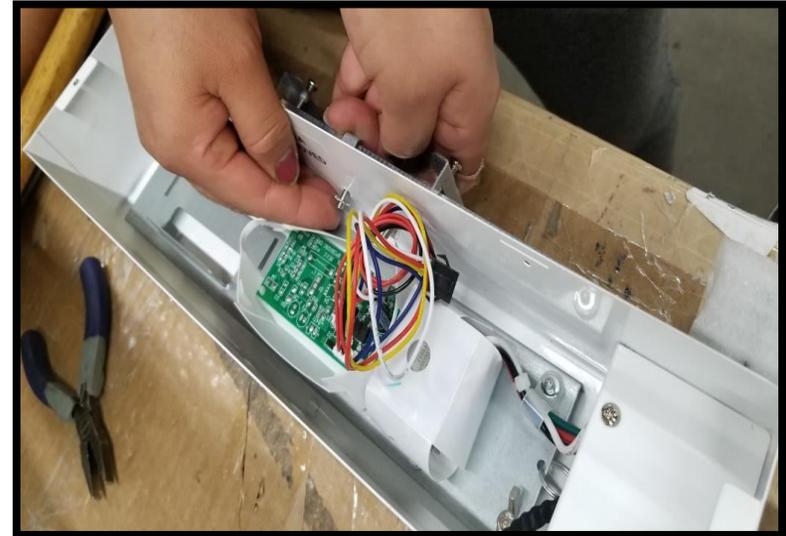

Using the screws and wingnuts secure the bar hanger to the housing



Finish installation and repeat the process with the other bar hanger

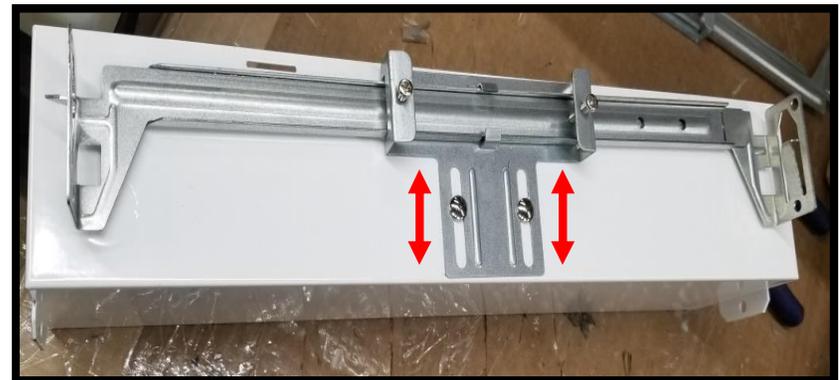

Bar hanger position can be adjusted by loosening the screws and sliding the bracket up/down