

# Albeo® PRC Series

LED IP65 Selectable Round High Bay



## Versatile Performance

- Universal 120-347V with 0-10V dimming to 10%
- Diecast aluminum with polycarbonate lens
- Suitable for -40°C to 50°C ambient temp





## 3 Lumen Outputs, 2 CCTs

- Selectable 15K/18K/21K or 24K/30K/34K Lumens
- Selectable 4000K/5000K CCT, 80 CRI



## Choose from 2 Sizes

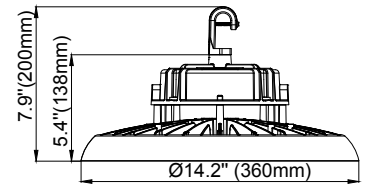

### Size 1X

5.5 lbs



Selectable	100W	15,000lm
	120W	18,000lm
	150W	21,000lm
Up to 155 LPW		

### Size 2X

6.0 lbs

Selectable	150W	24,000lm
	200W	30,000lm
	240W	34,000lm
Up to 160 LPW		

## Field Installable Sensor



## Mounting Options

- Hook (½" NPT) and 6ft cord included



See spec sheet for additional mounting options and accessories



# Ideal choice for distributors with affordable versatility, less SKUs

The Albeo® PRC Series is an NSF and IP65 rated wet location round high bay with an exceptional mixture of value and performance. Offering universal 120-347V, selectable lumens and CCT, field-installable sensors and accessories, the PRC is the ideal solution for a wide range of industrial and commercial applications including:

- Food and Beverage Processing
- Commercial Kitchens
- Cold Storage
- Manufacturing Facilities



**Size:** 11.8" Dia. or 14.2" Dia.

**Lumen Range:** Selectable 15,000-34,000 lumens

**Lumens Per Watt:** Up to 160 LPW

**Housing:** Die Cast Aluminum

**Finish:** Powder Coat, Black

**Lens:** Clear Polycarbonate

**Wattage Range:** 100 - 240W

**CCT/CRI:** Selectable 4000K / 5000K

**CRI:** 80 CRI

**Voltage:** 120 - 347V

**Dimming:** 0-10V Dimming to 10%

**Options:** Sensor, Wall Mount Bracket, Wire Guard, Polycarbonate Refractor, Drop Lens, Aluminum Reflector



## Want to learn more?

For Specific product technical questions, contact: [lightingproinfo@currentlighting.com](mailto:lightingproinfo@currentlighting.com)