# CFP

## EDGE-LIT FLAT PANEL
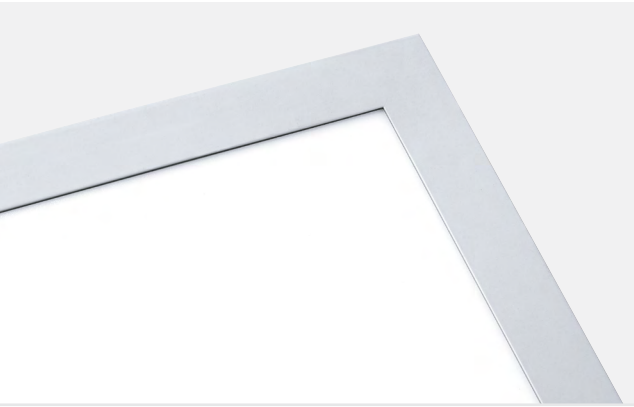
# CFP
## EDGE-LIT FLAT PANEL

## Attractive, Cost-Effective, Reliable

The CFP offers Edge-Lit LED technology in a sleek, modern, flat panel design. Light classrooms, offices, medical facilities, cleanrooms and general public spaces using edge-to-edge illumination, without pixelation or bright spots.

## Features and Benefits

- Switchable Lumen technology:
  5500/4100/3400 lumens (2x4)
  4000/3300/2800 lumens (2x2)
- Switchable CCT technology:
  3500/4000/5000K
- Suitable for ISO Class 5–9 positive pressure cleanrooms
- DLC® (DesignLights Consortium) Qualified, with some Premium Qualified configurations - see www.designlights.org

- 2x2 and 2x4 sizes
- 0–10V dimming to 10%
- Universal voltage (120–277V)
- 80 CRI
- IC rated
- Recessed, surface, or cable mount
- T-bar clips for secure mounting

**STOCK**

| CATALOG NO. | UPC | DESCRIPTION | SETTING | LUMENS | | | WATTS | LPW | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 3500K | 4000K | 5000K | | 3500K | 4000K | 5000K |
| CFP22-LSCS | 840141401874 | 2x2 Edge-Lit Panel, 4000/3300/2800 Switchable Lumens, 3500/4000/5000K Switchable CCT | LOW | 3174 | 3225 | 3137 | 24 | 131 | 133 | 129 |
| | | | MED | 3603 | 3679 | 3562 | 28 | 128 | 131 | 127 |
| | | | HIGH | 4381 | 4477 | 4291 | 35 | 124 | 127 | 122 |
| CFP24-41CS-HE | 840141421971 | 2x4 Edge-Lit Panel, 4100 Lumens, 3500/4000/5000K Switchable CCT | — | 4428 | 4507 | 4420 | 35 | 127 | 129 | 126 |

| CATALOG NO. | UPC | DESCRIPTION | LUMENS | WATTS | LPW |
|---|---|---|---|---|---|
| CFP22-40/33/2835 | 78531140977 | 2x2 Edge-Lit Flat Panel, 4000/3300/2800 Switchable Lumens, 3500K | 4281 | 40 | 108 |
| | | | 3338 | 30 | 113 |
| | | | 2876 | 25 | 115 |
| CFP24-55/41/3440 | 78531141004 | 2x4 Edge-Lit Flat Panel, 5500/4100/3400 Switchable Lumens, 4000K | 6143 | 50 | 122 |
| | | | 5030 | 40 | 125 |
| | | | 3945 | 31 | 128 |

**Made to Order (MTO) options**:
Add **ELL14**[1] (Emergency Battery Pack Installed, 1400 Lumens) or **C588** (5-wire Flex) to any stocked option.
Examples: **CFP14-55/41/3435-ELL14; CFP14-55/41/3435-C588**

1 Fixtures with Emergency Battery Pack require a remote-mounted test switch, we suggest the Dual-Lite PLRTS.

## ACCESSORIES (ORDER SEPARATELY)

| | |
|---|---|
| PLD10M | Dual-Lite® Emergency LED Battery Pack, field installed[1] |
| PLRTS | Remote Test Switch/Charge Indicator Module (fits single-gang box) |
| FK22 | 2x2 Single Flange Kit |
| FK24 | 2x4 Single Flange Kit |
| PSMK-22 | 2x2 Flat Panel Surface Mount Kit |
| PSMK-24 | 2x4 Flat Panel Surface Mount Kit |
| CFPCM36Y SC5F-KIT | 36" Cable Mount Kit for 1' or 2' wide Cable Mount fixtures, 5-wire |