


# CLT

Center Lens Troffer

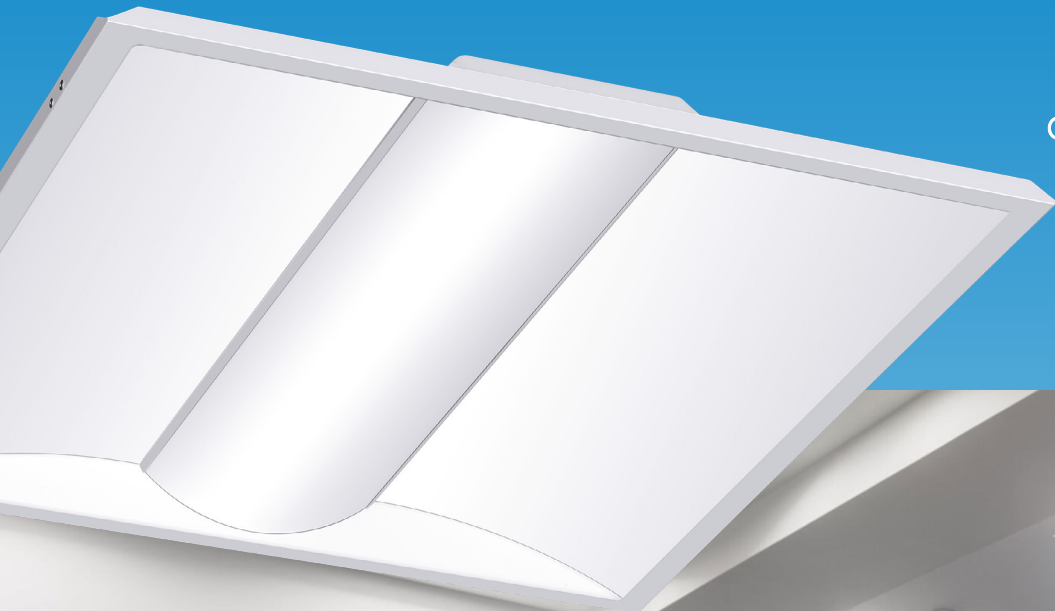


# CLT

## Center Lens Troffer

The CLT is a low-profile center lens troffer with switchable lumens and CCT designed to blend seamlessly into its environment.

### Features and Benefits


- Switchable Lumen technology:
  - 3250/3750/5000 lumens (2x2 size)
  - 3750/5000/6000 lumens (2x4 size)
- Switchable CCT technology: 3500/4000/5000K
- 80+ CRI
- 0-10V 1% Dim to Off driver (standard) provides superior dimming capabilities
- 120-347V, standard
- 5-Wire flex and EM battery pack options available
- Up to 157 lumens per watt

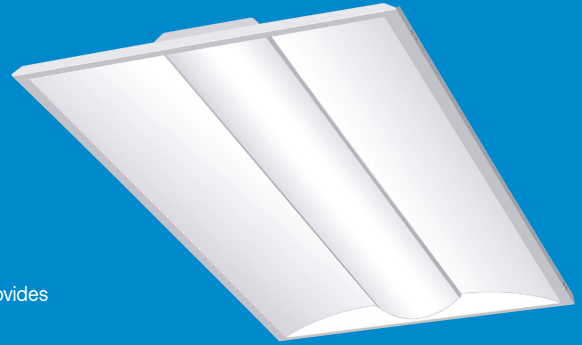

2x4



2x2



### Switchable technology:

Switchable Lumen and Switchable CCT technology allows for easy field-adjustable lighting output with switch located on back of the fixture.

STOCK



Catalog No.	UPC	Description	Setting	Lumens			Watts	LPW		
				3500K	4000K	5000K		3500K	4000K	5000K
CLT22-LSCS-EDD	840141417356	2x2 Center Lens Troffer, 3250/3750/5000 Switchable Lumens, 3500/4000/5000K Switchable CCT; 0-10V Dim-to-Off Driver; 120-347V	LOW	3279	3423	3339	23	143	149	145
			MED	3786	3980	3863	27	140	147	143
			HIGH	<b>5009</b>	5338	5083	38	132	140	134
CLT24-LSCS-EDD	840141417363	2x4 Center Lens Troffer, 3750/5000/6000 Switchable Lumens, 3500/4000/5000K Switchable CCT; 0-10V Dim-to-Off Driver; 120-347V	LOW	3820	3923	3864	25	153	157	155
			MED	5053	5228	5097	35	144	149	146
			HIGH	<b>6244</b>	6497	6276	45	139	144	139

### Ordering Guide

CLT		LSCS	EDD	Options
Model	Size	Lumen Output	Driver	
CLT Center Lens Troffer	22 2'x2' 24 2'x4'	LSCS Lumen & CCT Switchable <sup>1</sup>	EDD 0-10V Dim to Off	ELL14 10W Emergency Battery Pack (CEC Title 20 Compliant) Installed <sup>2</sup> C588 5-wire Flex

Notes:

- 1 Default settings for CLT is 3500K and the HIGH lumen setting
- 2 To determine the lumen output in emergency mode, multiply the battery wattage by the fixture lumens per watt (LPW)

### Accessories

Accessories (Order Separately)			
Catalog #	Part #	UPC	Description
FK22	FK22	078531000752	2' x 2' Single Flange Kit (Shipped separately)
FK24	FK24	078531038991	2' x 4' Single Flange Kit (Shipped separately)
PSMK-22	93302544	662055127912	2x2 Shallow Surface Mount Kit, 63mm
PSMK-24	93302545	662055127929	2x4 Shallow Surface Mount Kit, 63mm
DSMK-22	93313898	840141433219	2x2 Deep Surface Mount Kit, 110mm, for use with ELL14 option
DSMK-24	93313899	840141433226	2x4 Deep Surface Mount Kit, 110mm, for use with ELL14 option

### Dimensions

Typical Dimensions and Weights				
Sizes	(A) Length Inches (mm)	(B) Width Inches (mm)	(C) Height Inches (mm)	Weight lbs (kg)
2x2'	23.74 (603)	23.74 (603)	2.15 (54.6)	6.4 (2.9)
2x4'	47.76 (1213)			11.7 (5.3)

