


# NRL

TRANSITION®  
Narrow Recessed  
Linear

Columbia  
LIGHTING

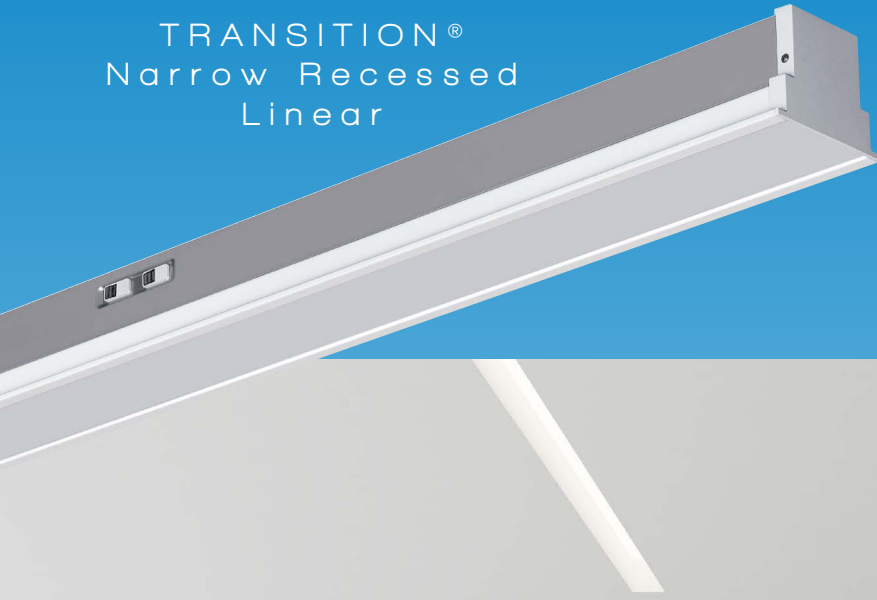

# NRL

## TRANSITION® Narrow Recessed Linear



### Architectural, Adjustable, Appealing, Linear

The NRL is an attractive recessed linear fixture designed with a 4" aperture, switchable lumens and CCT, continuous wiring, and polycarbonate lens that make it suitable for a host of applications.

### Features and Benefits


- Switchable Lumen technology:  
550/750/1000 Lumens per foot
- Switchable CCT Technology: 3500/4000/5000K
- 2', 4' and 8' lengths
- LED Modules and electrical accessible from below
- 80+ CRI
- 0–10V dimming to 10%, standard
- Universal voltage (120–277V)
- Up to 122 lumens per watt
- Continuous Wiring Standard
- Polycarbonate Lens



Catalog No.	UPC	Description	Setting	Lumens			Watts	LPW		
				3500K	4000K	5000K		3500K	4000K	5000K
<input type="checkbox"/> <b>NRL2-LSCS</b>	00840141408392	2' Narrow Recessed Linear, Switchable Lumen and Switchable CCT	LOW	1064	1078	1075	9	118	120	119
			MED	1529	1570	1545	13	118	121	119
			HIGH	1988	2048	2005	18	110	114	111
<input type="checkbox"/> <b>NRL4-LSCS</b>	00840141408408	4' Narrow Recessed Linear, Switchable Lumen and Switchable CCT	LOW	2124	2170	2161	18	118	121	120
			MED	2856	2924	2882	24	119	122	120
			HIGH	3988	4109	4002	35	114	117	114
<input type="checkbox"/> <b>NRL8-LSCS</b>	00840141408415	8' Narrow Recessed Linear, Switchable Lumen and Switchable CCT	LOW	4102	4118	4078	34	121	121	120
			MED	5978	6151	6031	52	115	118	116
			HIGH	7420	7681	7464	64	116	120	117

#### Accessories

- FKNRL2** 2' Single Flange Kit (Shipped separately)
- FKNRL4** 4' Single Flange Kit (Shipped separately)
- FKNRL8** 8' Single Flange Kit (Shipped separately)
- NRLCRK** Continuous Joiner Kit with Silicon Cover



### Ideal for the following applications:

- Classrooms and Offices
- Halls/Dorms
- Conference Rooms
- Meeting Rooms
- Common Areas

