
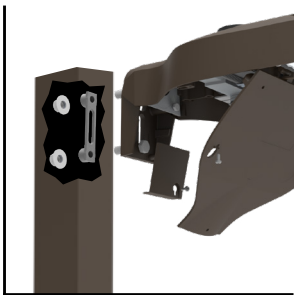



SLING tradeSELECT®

Compact sleek design with high performance LED configurations and simple installation. The Sling Trade Select offers four stock configurations which include a universal mounting block for easy pole installation.

- Capable of replacing up to 250W-400W luminaires
- Featuring Micro Strike Optics which maximizes target zone illumination with minimal losses at the house-side, reducing light trespass issues
- Visual comfort standard
- Lens distributions are field rotatable (in 90deg increments)
- Backlight Controls and House Side Shields available
- 4000K CCT
- 1.5G rated for high vibration applications including bridges and overpasses

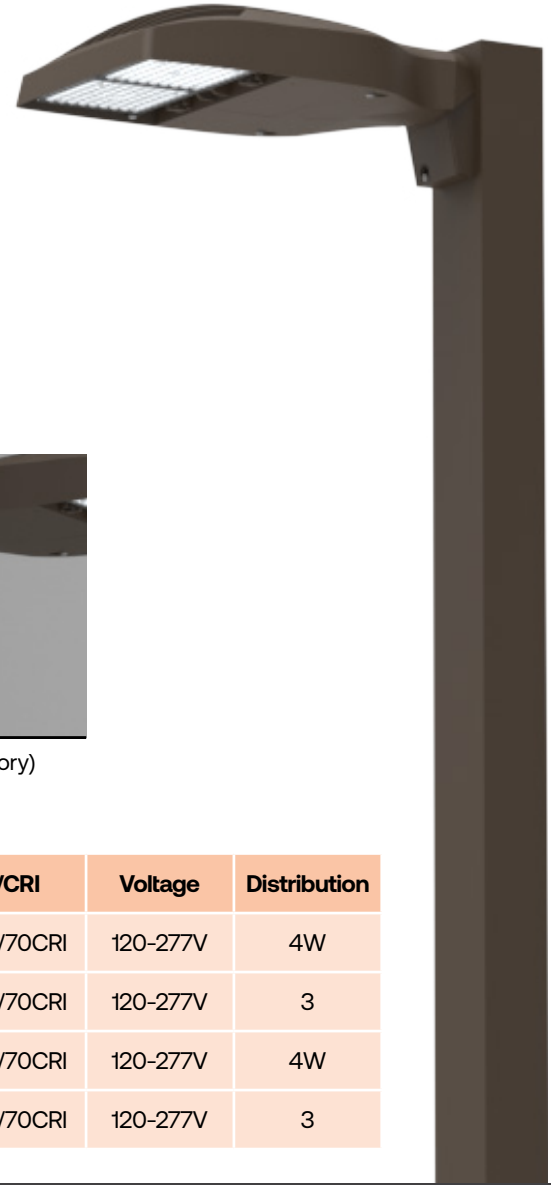

Universal Arm Mount (Standard)

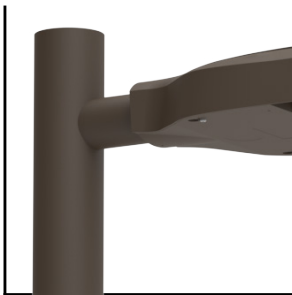

Mast Arm Fitter (Accessory)




Wall Mount (Accessory)


Performance Data

Stock Descriptions	Lumens	Wattage	HID Wattage Replacement	LED Count	CCT/CRI	Voltage	Distribution
ASL1-100-4W-ASQU	12,000	100W	250W	160L	4000K/70CRI	120-277V	4W
ASL1-100-3-ASQU	12,000	100W	250W	160L	4000K/70CRI	120-277V	3
ASL1-135-4W-ASQU	18,000	135W	400W	160L	4000K/70CRI	120-277V	4W
ASL1-135-3-ASQU	18,000	135W	400W	160L	4000K/70CRI	120-277V	3

Type 3 Distribution

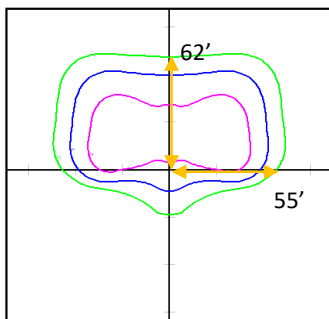


Sling: 135W at 25'




HID: 400W at 25'

Type 4 Distribution



Sling: 135W at 25'

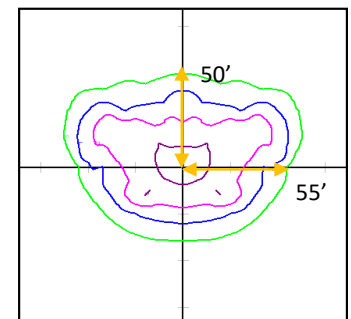

HID: 400W at 25'