

## Canless Recessed Downlight



LITEBOX<sup>®</sup>  
pro

LBRP

CANLESS RECESSED DOWNLIGHT




The LiteBox<sup>®</sup> Pro is a canless direct install downlighting family for New Construction or Remodel applications. Switchable lumen output, color temperature, and dial-in beam angle maximizes adjustability during installation.

FEATURES AND BENEFITS

- Switchable Lumen, CCT, and Beam Angle
- Integral wiring compartment (standard)
- Optional support pans for Joist or T-Grid ceilings
- Universal 120–277V with 0–10V Dim to Off
- Optional 120–347V with 0–10V to 5% dimming
- Long life L70 at >50,000 hrs (TM-21)
- Five year warranty


FIXTURE MODULE

9 Lumen Outputs in 3 Modules

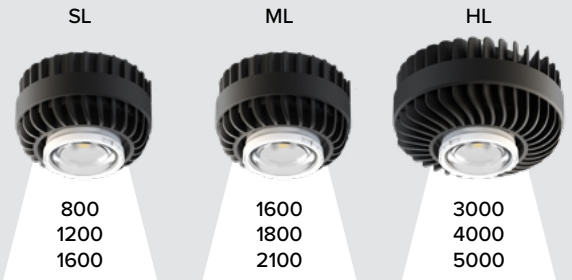

INTERCHANGEABLE TRIM

18 Aperture / Finish Combinations

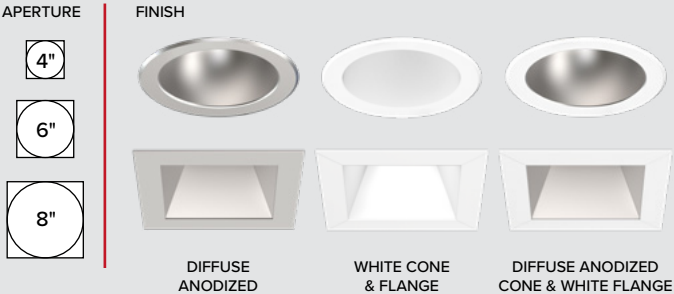

ORDERING GUIDE

EXAMPLE: LBRP-M-LSSLCS9 / LBRP-4RD-T-D

FIXTURE MODULE


Model/Type Configuration		Switchable Technology		Nominal Lumen Range		CCT/CRI		Options
LBRP-M		LS						
LBRP-M	Fixture Module, Direct Install, 0-10V Dimming	LS	Switchable Lumen	SL	800/1200/1600 Lumens	CS9	Switchable CCT (2700/3000/3500/4000/5000K), 90 CRI	Standard 120–277V, without EMR capability
				ML	1600/1800/2100 Lumens			
			HL	3000/4000/5000 Lumens <sup>1</sup>		27K9	2700K, 90 CRI	EMR Emergency Battery Backup ready <sup>2</sup>
						30K9	3000K, 90 CRI	
						35K9	3500K, 90 CRI	
						40K9	4000K, 90 CRI	
50K9	5000K, 90 CRI	34	Universal					

TRIM

Model	Aperture/Shape/Function	Trim	Reflector Finish/Color
LBRP		T	
LBRP	LiteBox Pro Trim	T	D Diffuse Clear Anodized
			WC White Cone and Flange
			DWT Diffuse Clear Anodized Cone & White Flange
	4RD	4" Round Downlight <sup>1</sup>	
	6RD	6" Round Downlight	
	8RD	8" Round Downlight	
	4SQD	4" Square Downlight <sup>1</sup>	
	6SQD	6" Square Downlight	
	8SQD	8" Square Downlight	

Notes  
1 4" Trim for use only with SL or ML Module.  
2 EMR and 120–347V options not available in combination.


FIELD ADJUSTMENTS FOR EVERY APPLICATION



Easy integral switch allows a wide range of configurations.



Reach new heights with higher lumen outputs and beam angle flexibility in one fixture.

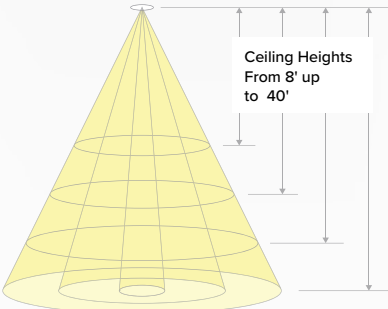

2700K 3000K 3500K 4000K 5000K



STOCK

Accessories

- Pan with Bar Hangers for T-Grid / Joist
- Pan Support for Joist
- 7W Emergency Battery Back-Up Pan with Bar Hangers for T-Grid/Joist, Remote Test Switch
- 7W Emergency Battery Back-Up Retrofit kit, Remote Switch
- Wide Lens Kit
- Lumen Switch Lock Kit





**HLI Solutions, Inc**

701 Millennium Blvd.  
Greenville, SC 29607

**[currentlighting.com/Prescolite](https://currentlighting.com/Prescolite)**

© 2023 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Rev 04/26/23

**PRE\_LBRP\_ss\_R04**

---