



To Find the Right Solutions

NEW
4" & 6"
Squares

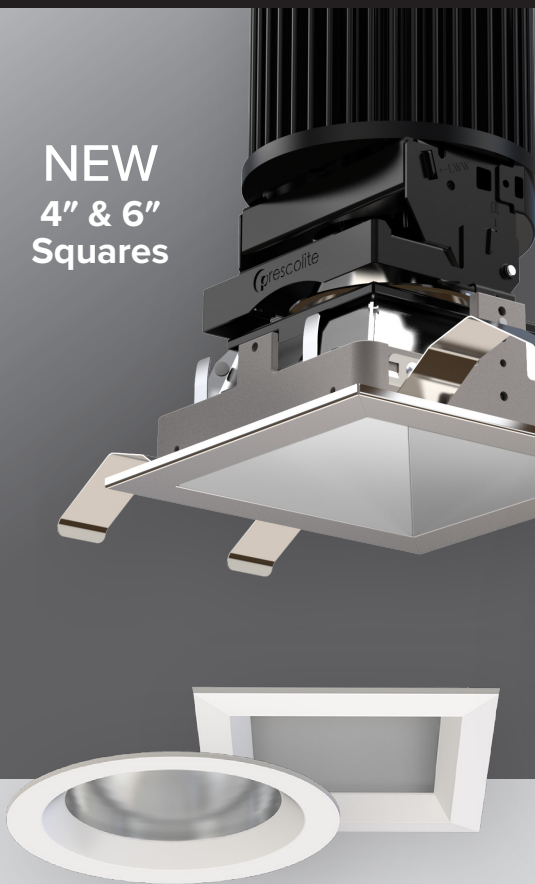

SHOWER TRIMS
Non-conductive "dead-front"

To Specify & Install

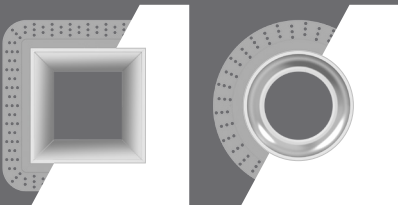

MUD-IN RINGS
for Flush Mount Flange



**SLOPED CEILING
ADAPTERS**
For ceiling slopes 5° to 35°
Available in 5° increments

OVERSIZED RINGS
Increases fixture flange diameter perfect for
concealing oversized ceiling holes

To Dial-In Performance



MEET THE NEW
NX LIGHTING
CONTROLS

NX WIRELESS

**HIGHER LUMEN
CHICAGO PLENUM CCEA**
Up to 8000 lumens (6")
Up to 6000 lumens (4")



MEETS STRINGENT REQUIREMENTS




To Have High Quality Color



DIM TO WARM
2200K – 3000K

SpectraSync[™]
Color Tuning Technology



TUNABLE WHITE
2700K – 5000K
2700K – 6500K



Making it **SIMPLER** to get it **FAST** with popular SKUs ready to ship!