

Canless Recessed Downlight



LITEBOX<sup>®</sup>

pro

# LBRP

## CANLESS RECESSED DOWNLIGHT



The LiteBox<sup>®</sup> Pro is a canless direct install downlighting family for New Construction or Remodel applications. Switchable lumen output, color temperature, and dial-in beam angle maximizes adjustability during installation.

### FEATURES AND BENEFITS

- 4", 6" and 8" apertures, 800 to 5000 lumens
- Spun aluminum anodized or white trim, 55° cutoff
- Switchable Lumen, CCT, and Beam Angle
- Integral wiring compartment (standard)
- Optional support pans for Joist or T-Grid ceilings
- Universal 120-277V with 0-10V Dim to Off
- Long life L70 at >50,000 hrs (TM-21)
- Five year warranty

#### 9 Lumen Outputs in 3 Modules

#### FIXTURE MODULE



#### 9 Aperture/Finish Combinations

#### INTERCHANGEABLE TRIM



ORDERING GUIDE **STOCK**

EXAMPLE: LBRP-M-LSSLCS9 / LBRP-4RD-T-D

#### FIXTURE MODULE

Model/Type Configuration	Switchable Technology	Nominal Lumen Range	CCT/CRI	Options
<b>LBRP-M</b>	<b>LS</b>			
<b>LBRP-M</b> Fixture Module, Round Direct Install, 120-277V with 0-10V Dim to Off	<b>LS</b> Switchable Lumen	<b>SL</b> 800/1200/1600 Lumens <b>ML</b> 1600/1800/2100 Lumens	<b>CS9</b> Switchable CCT (2700/3000/3500/4000/5000K), 90 CRI	Standard without EMR capability
		<b>HL</b> 3000/4000/5000 Lumens <sup>1</sup>	<b>27K9</b> 2700K, 90 CRI <b>30K9</b> 3000K, 90 CRI <b>35K9</b> 3500K, 90 CRI <b>40K9</b> 4000K, 90 CRI <b>50K9</b> 5000K, 90 CRI	<b>EMR</b> Emergency Battery Backup ready



#### TRIM

Model	Aperture/Shape/Function	Trim	Reflector Finish/Color
<b>LBRP</b>		<b>T</b>	
<b>LBRP</b> LiteBox Pro Trim	<b>4RD</b> 4" Round Downlight <sup>1</sup> <b>6RD</b> 6" Round Downlight <b>8RD</b> 8" Round Downlight	<b>T</b> Trim	<b>D</b> Diffuse Clear Anodized <b>WC</b> White Cone and Flange <b>DWT</b> Diffuse Clear Anodized Cone & White Flange


Notes  
<sup>1</sup> 4" Trim for use only with SL or ML Module.

## FIELD ADJUSTMENTS FOR EVERY APPLICATION

Easy integral switch allows a wide range of configurations.

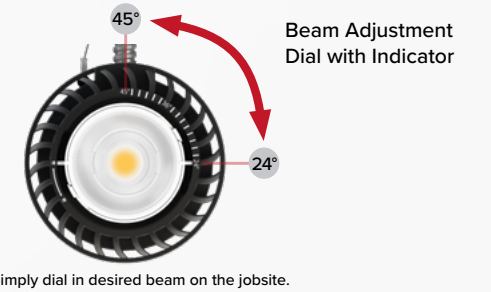

Reach new heights with higher lumen outputs and beam angle flexibility in one fixture.

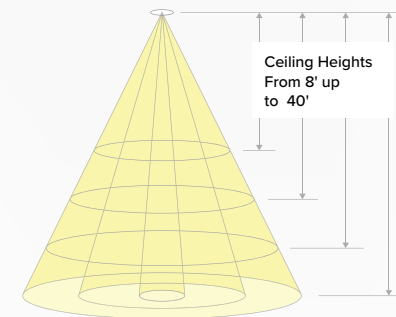

2700K 3000K 3500K 4000K 5000K



**STOCK**

Accessories	
<b>LB-4R-F-TG</b>	Accessory, Pan w/Bar Hangers for T-Grid/Joist, 4" Round
<b>LB-4R-F-J</b>	Accessory, Pan Support for Joist, 4" Round
<b>LB-6R-F-TG</b>	Accessory, Pan w/Bar Hangers for T-Grid/Joist, 6" Round
<b>LB-6R-F-J</b>	Accessory, Pan Support for Joist, 6" Round
<b>LB-8R-F-TG</b>	Accessory, Pan w/Bar Hangers for T-Grid/Joist, 8" Round
<b>LB-8R-F-J</b>	Accessory, Pan Support for Joist, 8" Round
<b>LB-4R-F-TG-EMR</b>	Accessory, 7W Emergency Battery Back-Up Pan w/Bar Hangers for T-Grid/Joist, 4" Round, Remote Test Switch
<b>LB-6R-F-TG-EMR</b>	Accessory, 7W Emergency Battery Back-Up Pan w/Bar Hangers for T-Grid/Joist, 6" Round, Remote Test Switch
<b>LB-8R-F-TG-EMR</b>	Accessory, 7W Emergency Battery Back-Up Pan w/Bar Hangers for T-Grid/Joist, 8" Round, Remote Test Switch
<b>LBRP-EMR</b>	Accessory, 7W Emergency Battery Back-Up Retrofit Kit, Remote Test Switch
<b>LBRP-WDLENS 8PK</b>	Accessory, Wide Lens for Housing, 8 Pack
<b>LBRP-LLOCK 16PK</b>	Accessory, Lumen Switch Lock for Housing, 16 Pack





**HLI Solutions, Inc**

701 Millennium Blvd.  
Greenville, SC 29607

**[currentlighting.com/Prescolite](https://currentlighting.com/Prescolite)**

© 2023 HLI Solutions, Inc. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Rev 02/02/23

**PRE\_LiteBox\_Pro\_sellsheet\_R02**

---