


Canless Recessed Downlight

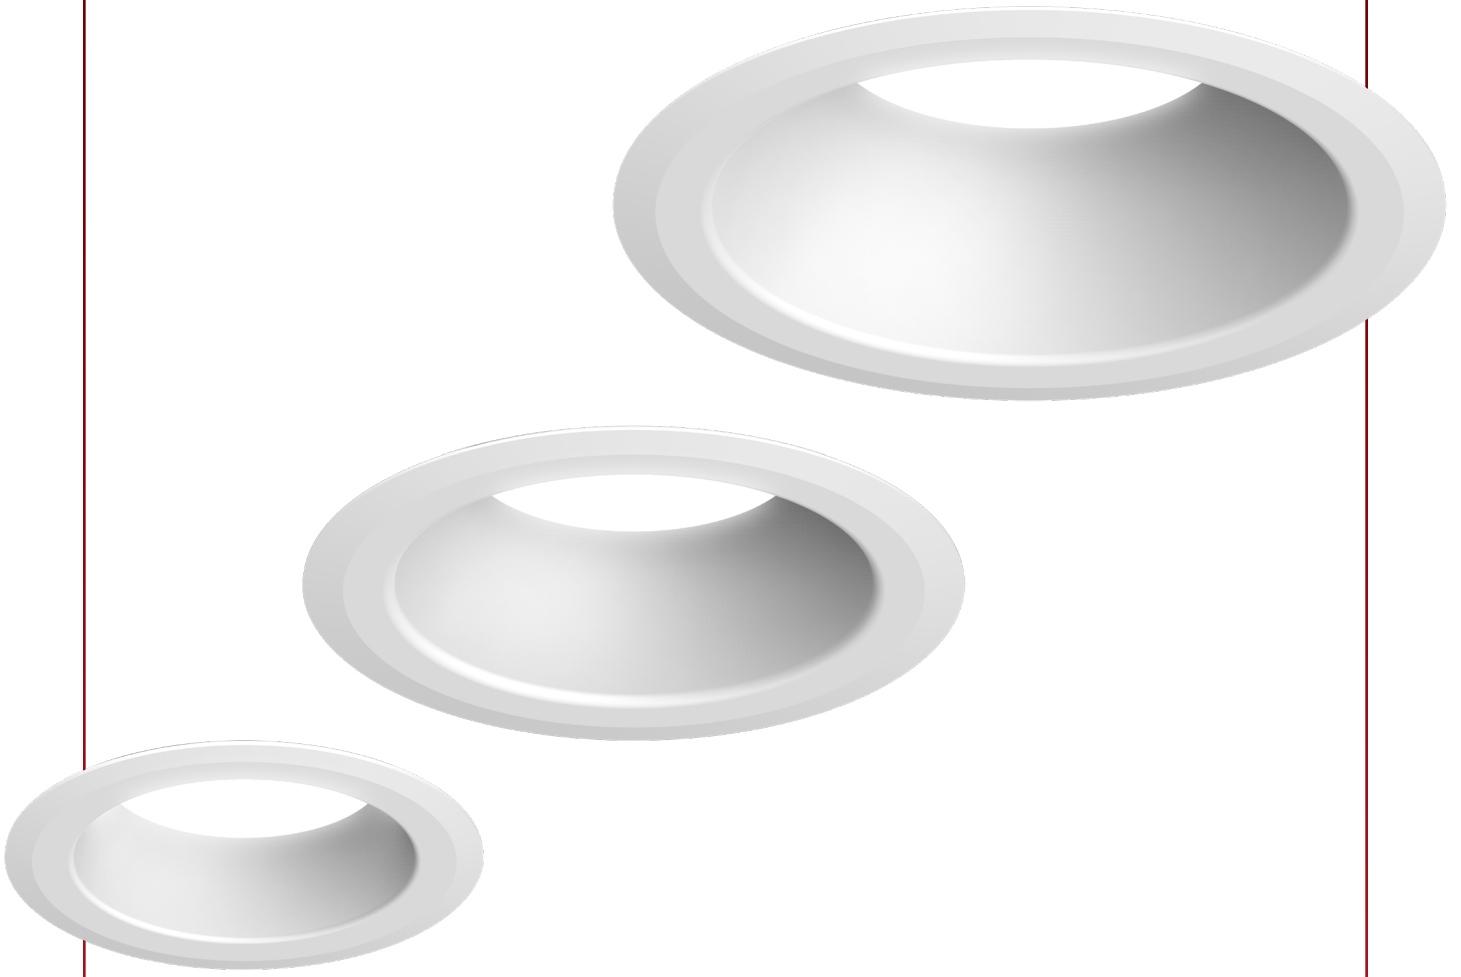

LITEBOX[®]
standard
(120–277V)


LBRST (120–277V)

CANLESS RECESSED DOWNLIGHT



FEATURES AND BENEFITS

- Designed for new construction, remodel, or retrofit
- 4", 6" and 8" apertures, 750 to 4600 lumens
- Switchable Lumen and CCT
- Universal 120-277V with Tri-Dimming (0–10V to 1%; TRIAC/ELV to 5%)
- Long life L80 at >54,000 hrs (TM-21)
- Five year warranty

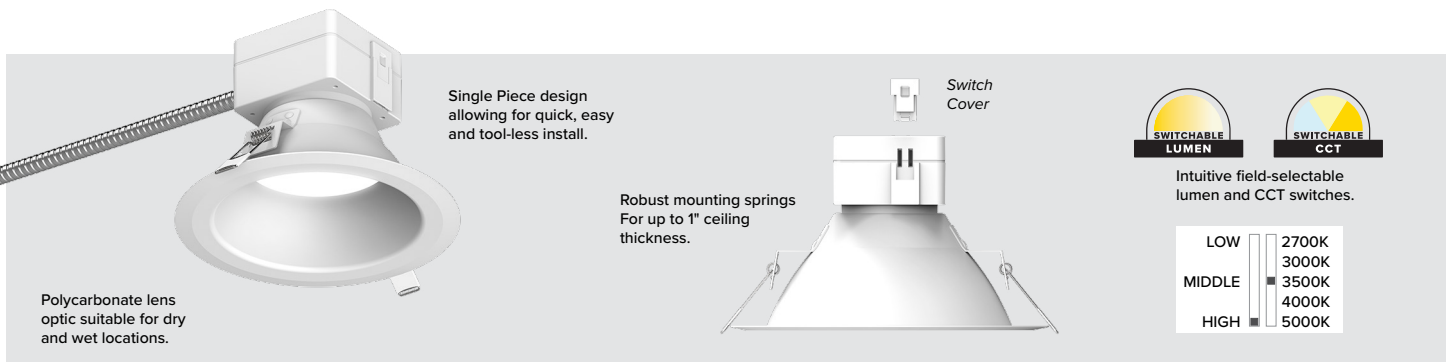


ACCESSORIES

NON-CONDUCTIVE COLOR TRIMS



MOUNTING PANS

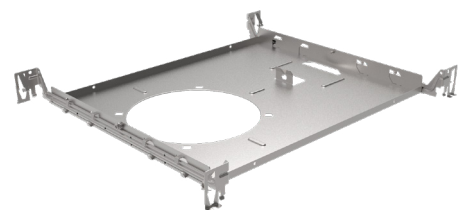

Available with or without emergency battery backup

ORDERING GUIDE **

STOCK

EXAMPLE: LBRST-6RD-M-LSML-CS9-WH

FIXTURE MODULE/TRIM

Family	Aperture/Shape/Function	Model/Type	Switchable Technology	Nominal Lumen Range
LBRST LiteBox [®] Standard	4RD 4" Round ¹ 6RD 6" Round 8RD 8" Round	M Fixture Module/Trim, Round 120–227V with Tri-Dimming (0–10V to 1%, ELV/TRIAC to 5%)	LS Switchable Lumen	SL 750/1100/1500 lumens (4" only) ML 1100/1500/2500 lumens (6" only) HL 3000/4000/4600 lumens (8" only)

CCT/CRI	Reflector Finish/Color	Options
CS9 Switchable CCT (2700/3000/3500/4000/5000K), 90CRI	WH White	Standard without EMR EMR Emergency Battery Back up Ready **

Notes

- ** Refer to spec sheet for complete ordering details
- ¹ Only 4RD SL is IC rated