







LBSD


SURFACE MOUNT DISK DOWNLIGHT



The LiteBox® Disk is a surface mount downlight that can be installed onto most standard J-boxes or retrofitted onto existing 4", 5", or 6" recessed housings with optional accessory

FEATURES AND BENEFITS


- 4" or 6" fixtures delivering 700 or 1000 lumens
- Installs directly to most 3-1/2" and 4" J-Boxes
- Retrofit into 4", 5" or 6" recessed cans with optional accessory
- CCT Switchable (2700K / 3000K / 3500K / 4000K, 90+ CRI)
- Universal 120-277V, ideal for commercial applications
- All models standard with Triac/ELV dimming to 5%
- 80 lm/W or higher
- Long life L70 at >54,000 hrs (TM-21)
- Five year warranty



Intertek



Integral CCT switch on driver

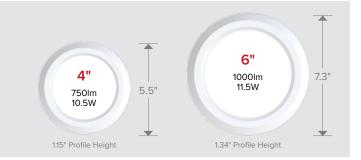

NEW CONSTRUCTION

J-BOX MOUNT (STANDARD)

LBSD is compatible with many standard 3-1/2" and 4" octagonal and round J-Boxes with a 1-1/2" minimum depth. Fire rated J-Boxes may also be used.

REMODEL

RETROFIT INTO EXISTING RECESSED CANS

For easy installation, each kit includes a Medium Base E26 socket adapter and Quick-Link connector. Friction springs are provided for 4"; the 6" accessory kit torsion springs can be installed to fit nominal 5" or 6" aperture can.

EXAMPLE: LBSD-4RD-CS9-WH



ORDERING GUIDE

STOCK	Model/CCT Configuration		Аре	Aperture/Shape/Function		CCT/CRI CS9		Trim Color - WH	
	LBSD -		_						
	LBSD	Disk Surface Mount	4RD	4" Round, 700 Lumens	CS9 Switchable CCT, 90 CRI 2700K/3000K/ 3500K/4000K	WН	White		
			6RD	6" Round, 1000 Lumens					
	Notes								

1 Phase (Triac/ELV) dimming when connected to 120V circuit only.

Copyright © 2022 Prescolite, All rights reserved.

Please refer to online specifications for most up-to-date content as specifications are subject to change without notice.