

# 4L-W-D

MOD™ 4 LED WALL DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

## FEATURES

- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- 2 SDCM color consistency
- End cap design eliminates visible diffuser seams/gaps
- TriGain® Technology provides superior color quality without compromising efficacy. The 4L-W-D series delivers 90 CRI at 122 LPW



## CONTROLS TECHNOLOGY



## SERVICE PROGRAM



## SPECIFICATIONS

### CONSTRUCTION

- Housing constructed from extruded aluminum
- End caps constructed from die cast aluminum with magnetic interface
- End caps overlap diffuser at each fixture end to eliminate gaps and LED visibility

### OPTICAL PERFORMANCE

- 2 SDCM color consistency, 90 CRI
- SOF: Soft diffuse acrylic lens
- REG: 1/2" regressed softglo lens with painted steel inserts. Output multiplier (.77)
- BWO: White blade baffle with softglo lens overlay. Output multiplier (.70)
- ASYM: Asymmetric Highly transmissive diffuse acrylic lens with linear prisms
- DRP: 1/2" protruding soft diffuse "drop" lens

### INSTALLATION

- Illuminated corners available in 90°, 120°, 135°. One piece construction, ready to install, with diffusers that match adjoining fixtures. Corner system connectors must be used to form patterns. The length of each outside or inside illuminated corner is 12"



### ELECTRICAL

- Variable Intensity (VI) technology allows precise specification of fixture output/wattage. Fixture will be programmed and labeled to specification. Indirect and direct hemispheres can be independently specified
- LED boards and drivers can be accessed and removed from fixture, while installed
- Entire LED module can be removed and replaced
- 1C (1 Circuit) Fixture wired for a single circuit
- Emergency Battery: 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting. Inverter-Compatible. Provided by others. Available in 4'+ fixtures
- Current's patented TriGain® phosphor delivers 90 CRI color quality at 80 CRI efficacy

### CONTROLS

- Sensors install between diffusers
- NX Lighting Controls provides options for standalone and networked integrated sensor with wired or wireless connectivity for NX system deployments
- SpectraSync™ Color Tuning Technology: Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants

MOD™

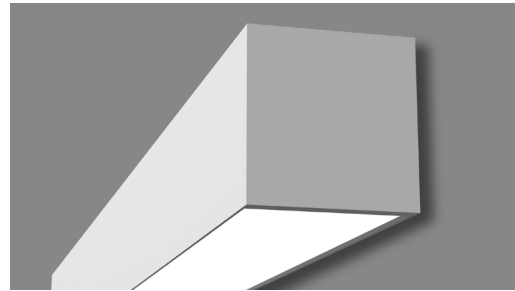

	Weight
4L-W-D	3 lbs/ft

### CERTIFICATIONS

- CSA listed for damp location
- IBEW
- AF of L
- UL924
- This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) and Trade Agreements Act (FAR 52.225-11). See [Buy America\(n\) Solutions](#).
- Emergency Battery Backup options are California Energy Commission (CEC) Title 20 Compliant.

### WARRANTY

- LED boards - 5 years
- LED drivers (standard) - 5 years
- LED drivers (Lutron) - 3 years

KEY DATA	
Lumen Range Per Foot	D: 300–1250
Wattage Range Per Foot	2.5–11.2
Efficacy Range (LPW)	112–122
Rated Life (Hours)	L90: >60,000

# 4L-W-D

MOD™ 4 LED WALL DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Gray Highlighting = 10 Day Quick Ship Program



## ORDERING GUIDE

Example: 4L-WS2-D-8.3-08-SOF-C1-27K9-D030-D01-1C-UNV

CATALOG #

4L						
Series	Mounting	Fixture Distribution	Row Length (In Feet)	Max Length in Row	Downlight Diffuser	Finish/Color <sup>4</sup>
4L MOD	W Wall	D Direct AD Asymmetric Direct	—' Enter in foot increments	02 2', 609 mm 03 3', 914 mm 04 4', 1219 mm 05 5', 1524 mm 06 6', 1829 mm 08 8', 2438 mm	SOF Soft Diffuse Lens, Lambertian REG Regressed Diffuse Lens <sup>1</sup> BWO Blade Baffle with Overlay <sup>1</sup> ASYM Asymmetric Diffuse Lens <sup>1,2</sup> DRP Drop Lens <sup>1,3</sup>	C1 Matte White (Default) C2 Textured Matte White C3 Light Silver C4 Machined Aluminum C5 Carbon Black C6 Textured Camera Black CC Custom Color

Color Temperature	Direct Output/ft <sup>6</sup>	Driver	Circuiting	Voltage
27K9 2700K, 90 CRI <sup>3</sup> 30K9 3000K, 90 CRI 35K9 3500K, 90 CRI 40K9 4000K, 90 CRI 50K9 5000K, 90 CRI <sup>3</sup> 2230TD 2200K–3000K SpectraSync™ Dim-to-Warm <sup>3,5</sup> 2765T 2700K–6500K SpectraSync™ Tunable White <sup>3,5</sup>	D030 300 (min) <sup>7</sup> to D125 1250 (max)	D01 1% Dimming, 0–10V D00 1% Dim-to-Off, 0–10V D05 SpectraSync 5% Dimming, 0–10V <sup>8</sup> DS1 1% Dimming w/ Soft Start, 0–10V DS0 1% Dim-to-Off w/ Soft Start, 0–10V LEC Hi-lume 1% Ecosystem LED Driver <sup>3</sup> DALI DALI <sup>3</sup> DALIP Powered by DALI (2.0) <sup>3</sup> NDM Non-Dimming	1C 1 Circuit	UNV Universal Voltage (120V through 277V) 347 347 Volt <sup>3,9</sup>

## OPTIONAL

Nightlight	Emergency	Thru-wiring	Patterns <sup>3,12</sup>
NL Nightlight Circuit Required. Enter quantity. 2NL = 2 nightlight circuits/row	EF 10W Emergency Battery Pack. Enter quantity. 2EF = 2 emergency batteries/row. (CEC Title 20 Compliant) <sup>10</sup>	W1 No Thru Wire W2 Provide Normal and Emergency/ Nightlight Thru Wiring <sup>11</sup> W3 Provide Normal Thru Wiring Only	C90L Illuminated 90° Corner C120L Illuminated 120° Corner C135L Illuminated 135° Corner

### Control Options<sup>3</sup>

#### NX Networked – Wired

NXE NX Wired Dual RJ45 SmartPORTS, without Sensor<sup>13,14</sup>

NXERM NX Wired Dual RJ45 SmartPORTS and Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming<sup>13,14</sup>

#### NX Networked – Wireless

NXWRM NX Networked Wireless Enabled Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming<sup>13,14</sup>

NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth® Programming, without Sensor<sup>13,14</sup>

#### Sensors

SD1 Daylight Sensor Required. Enter quantity. 2SD1 = 2 daylight sensors/row

SO1 Occupancy Sensor Required. Enter quantity. 2SO1 = 2 occupancy sensors/row

#### Notes:

- Not Available with Patterns.
- Must be ordered with AD.
- Additional lead time may be applicable. Contact factory.
- Visit [currentlighting.com/litecontrol](http://currentlighting.com/litecontrol) for details.
- Must be ordered with D05 Driver option; excludes 2' lengths and patterns.
- Specifiable in 50 lumen increments. Reference the Performance Data Table for full performance offering and exceptions.
- D030 not available in 2'
- Must be ordered with 2230TD or 2765T option
- Excludes Emergency Battery Pack 'EF' Option. Excludes DALI, DALIP and Lutron (LEC) Dimming Drivers
- EF - 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting. Inverter-Compatible. Provided by others.
- Only applicable when specified with Emergency/Nightlight.
- Contact Factory for pattern configurations. Approval drawings required.
- NX In-Fixture Control Options:**
- Not available for row mounting. Only available with 0–10V Driver options. Contact factory for Length restrictions.
- Refer to NX Integrated Controls Reference Table for Functionality of Options.

# 4L-W-D

MOD™ 4 LED WALL DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


## CONTROLS OPTIONS AND FUNCTIONALITY



	Control Option Ordering Logic & Description	Control Option Functionality										Control Option Components
		Sensor	Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth® App Programming	Sensor Height	
NX Wired	NXE NX Wired Dual RJ45 SmartPORTS, without Sensor	N/A	✓	✓	✓	-	-	✓	✓	Requires NXBTC dongle <sup>1</sup>	-	NXDSP
	NXERM NX Wired Dual RJ45 SmartPORTS and Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming	NXSMP2-LMI	✓	✓	✓	✓	✓	✓	✓	✓	Max: 12'	NXSMP2-LMI NXDSP
NX Wireless	NXWRM NX Networked Wireless Enabled Integral NXSMP2-LMI PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth® Programming	NXSMP2-LMI	✓	✓	✓	✓	✓	✓	✓	✓	Max: 12'	NXSMP2-LMI
	NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth® Programming, without Sensor	N/A	✓	✓	✓	-	-	✓	✓	✓	-	NXRM2-H

<sup>1</sup> NXBTC needs to be plugged into an available NX SmartPort™ on the fixture network

### 4L-W-D WITH NXWRM WIRELESS CONTROL OPTION

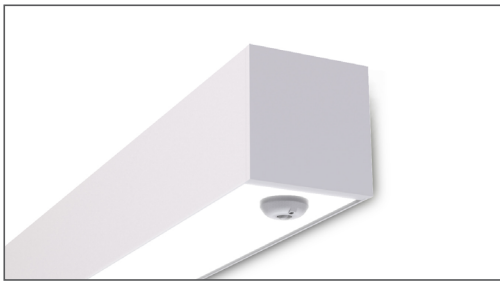

### CONTROLS TECHNICAL SUPPORT

1-800-888-8006 (7:00 am–7:00 pm est)

### APP INFORMATION

#### NX Lighting Controls App



The NX Lighting Controls App is a free to use mobile application for programming both an NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enabled luminaires and program your NX system settings.



Android



Apple iOS

#### NX Connect App



The NX Connect mobile App is a free to use mobile application for programming a NX Connect System. The mobile App allows you to discover, configure and share your NX Connect system.



Apple iOS

## CONTROLS OPTIONS AND FUNCTIONALITY (CONTINUED)

### SpectraSync™ Color Tuning Technology:


Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants with distinct SpectraSync™ Color Tuning Technologies.



SPECTRASYNCH COLOR TUNING TECHNOLOGY		
Mode	Kelvin Range	Description
Dim to Warm	2200K–3000K	Mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed
Tunable White	2700K–6500K	Offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors or the aesthetics of the space
Scheduled White	2700K–6500K	Mimics the rhythm of natural light or follows an alternative user-defined schedule throughout the day, enhancing an occupant's mood and well-being

### SpectraSync Tunable White

Available in 2765T (2700K–6500K). Requires two 0–10V controllers, one for intensity and one for CCT. Minimum 5% dimming.

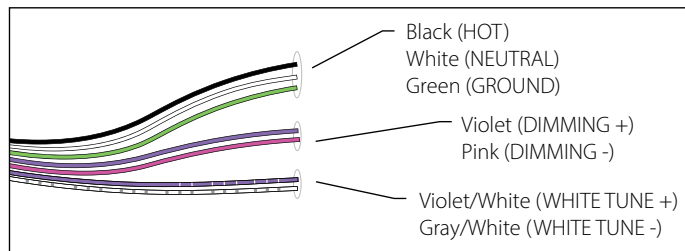


SpectraSync Tunable White luminaires are provided with two 0–10V circuits. The violet and pink circuit is for wiring to any qualified 0–10V controller for dimming. The violet/white and gray/white circuit is for wiring to any qualified 0–10V controller for Tunable White CCT control.

### Controller Manufacturer Data

SpectraSync Tunable White was designed to be used with sinking style dimmers (provided by others) and is compatible with:

- Current: NX Lighting Controls Room Controllers (NXRC) and In-fixture Controllers (NXFM)
- Lutron: DDTV, DVSTV, and NDTV dimmers
- Wattstopper: ADF120277 and CD4BL (Titan) dimmers

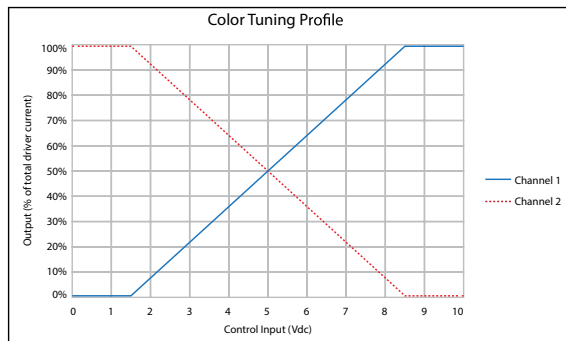

## PERFORMANCE DATA TABLE

The table below shows the delivered lumens for the various lumen outputs. Use this chart in connection with the output multiplier capability to deliver any output required.

Nomenclature	Lumens/Ft	W/Ft	Efficacy
Downlight			
D030 (min)	300	2.5	120
D050	500	4.1	122
D075	750	6.2	120
D125	1250	10.2	122

(wattage may vary up to 5% from published)

### Output Multiplier Table

Photometrics for the MOD family are published here at a nominal 3500K temperature. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

Option	2700K 90 CRI	3000K 90 CRI	3500K 90 CRI	4000K 90 CRI	5000K 90 CRI
SOF	0.89	0.96	1.00	1.00	0.99
REG	0.69	0.74	0.77	0.77	0.76
BWO	0.62	0.67	0.70	0.70	0.69
ASYM	0.89	0.96	1.00	1.00	0.99
BAT	0.89	0.96	1.00	1.00	0.99
DRP	0.89	0.96	1.00	1.00	0.99
LPAD	0.80	0.86	0.90	0.90	0.89

Technical drawings of the 1000 Series Linear LED Light Fixture, showing dimensions for the 3'-8' and 2' ONLY versions.

**3'-8' Version Dimensions:**

- Overall Length:  $3' - 8"$
- Mounting Hole Spacing:  $11 \frac{13}{16}"$
- Fixture Length:  $FIXTURE LENGTH + 1/2"$
- Mounting Hole Diameter:  $1/2" \text{ KO}$
- Mounting Hole Spacing:  $5/8" \text{ KO}$
- Mounting Hole Diameter:  $1/4"$
- Mounting Hole Spacing:  $8"$
- Mounting Hole Diameter:  $4 \frac{13}{16}"$
- Mounting Hole Diameter:  $11 \frac{13}{16}"$

**2' ONLY Version Dimensions:**

- Overall Length:  $2' \text{ ONLY}$
- Mounting Hole Spacing:  $11 \frac{13}{16}"$
- Mounting Hole Spacing:  $8 \frac{13}{16}"$
- Mounting Hole Spacing:  $12"$
- Mounting Hole Spacing:  $15 \frac{3}{16}"$

**Front View Dimensions:**

- Overall Width:  $7"$
- Mounting Hole Spacing:  $5 \frac{1}{8}"$
- Mounting Hole Diameter:  $2 \frac{3}{4}"$

The image contains two technical drawings of corner brackets. The left drawing is labeled "OUTSIDE CORNER" and shows a bracket with a vertical leg of height 12 and a horizontal leg of width 12. The corner is labeled "90°, 120°, 135°". Dimensions include a top flange width of 4 7/16", a mounting hole offset of 12 from the corner, a hole diameter of 3.5, and a bracket thickness of 1/2. The horizontal distance from the corner to the mounting hole is labeled "A". The right drawing is labeled "INSIDE CORNER" and shows a bracket with a vertical leg of height 12 and a horizontal leg of width 12. The corner is labeled "90°, 120°, 135°". Dimensions include a top flange width of 4 7/16" (4L), a mounting hole offset of 12 from the corner, a hole diameter of 3.5, and a bracket thickness of 1/2. The horizontal distance from the corner to the mounting hole is labeled "B". The horizontal leg is labeled "male end of row" and the vertical leg is labeled "female end of row".

Technical drawing of the front view of the 'Small' box. The drawing shows a square box with a handle on the left side. The dimensions are: width 4.93" (125mm), height 4.5" (114mm), and a small square detail on the left side with width 4.25" (108mm).

**END CAP VIEW**

# 4L-W-D

MOD™ 4 LED WALL DIRECT

DATE: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
CATALOG #: \_\_\_\_\_

## PHOTOMETRY

### 4L-W-D-04-SOF-X-CX-35K9-D100


#### LUMINAIRE DATA

Description	4L Wall, Soft Diffuse Lens, 3500K
Delivered Lumens	3999
Watts	
Efficacy	112
Mounting	Wall

#### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	1885.80	47.1
0-60	3214.60	80.4
0-90	4000.10	100.0
0-180	4000.10	100.0

#### POLAR GRAPH

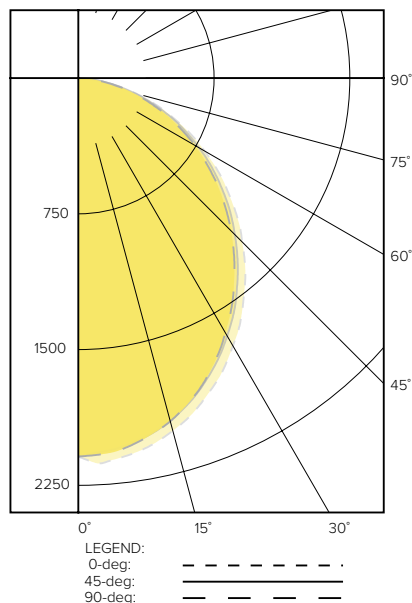

### 4L-W-AD-4-ASYM-X-CX-35K9-D050


#### LUMINAIRE DATA

Description	4L Wall, Soft Diffuse Lens, 3500K
Delivered Lumens	2000
Watts	
Efficacy	124
Mounting	Wall

#### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-40	982.00	48.7
0-60	1658.00	82.3
0-90	2016.00	100.0
0-180	2016.00	100.0

#### POLAR GRAPH

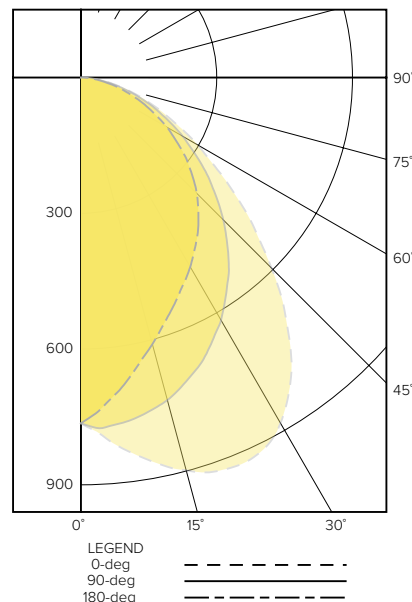

PHOTOMETRY CONTINUED

4L-X-D-04-DRP-CX-35K9-D100


LUMINAIRE DATA

Description	4L Wall, Drop Lens, 3500K
Delivered Lumens	4000
Watts	
Efficacy	110
Mounting	Wall

ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0-40	1613.26	402.60
0-60	2797.69	70.50
0-90	3677.99	92.70
0-180	3969.32	100.0

POLAR GRAPH

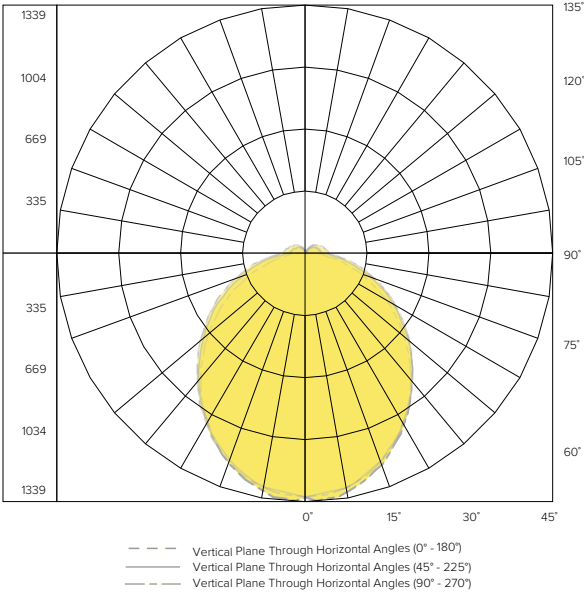

TM-30 DATA

COLOR VECTOR GRAPHIC

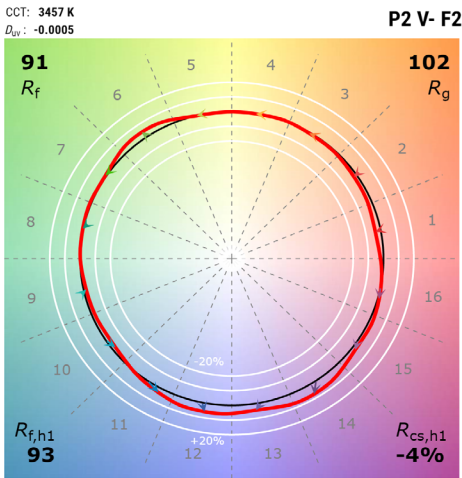

\*Graphics shown are at 35K  
— Reference Illuminant — Test Source



# 4L-W-D

MOD™ 4 LED WALL DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

## ADDITIONAL INFORMATION

### Driver

D01	100%–1% dimming range. Fixture will be wired for low voltage 0–10V dimming control.
D00	Dim-to-Off 100%–1% dimming range. Fixture will be wired for low voltage 0–10V dimming control.
D05	100%–5% dimming range. Fixture will be wired for low voltage 0–10V dimming control. Only applicable if either 2230TD, 2750T or 2765T is selected.
DS1	Soft-Start 100%–1% dimming range. Fixture will be wired for low voltage 0–10V dimming control.
DS0	Soft-Start Dim-to-Off 100%–1% dimming range. Fixture will be wired for low voltage 0–10V dimming control.
LEC	Hi-Lume 1% EcoSystem LED Driver with Soft-On, Fade-to-Black dimming technology.
DALI	DALI compatible.
DALIP	Self-Powered DALI bus (e.g. DEXAL)
NDM	Non-dimming. Fixture will be wired for fixed light output.

### Rated Life

Tested in accordance to LM79-2008 & derived from EPA TM-21 calculator

L70: 280,000 (calculated per TM-21 extrapolated curve)

L70: >61,000 (reported per TM-21/LM80 6x's limitation)

L90: 72,000 (calculated per TM-21 extrapolated curve)

L90: >61,000 (reported per TM-21/LM80 6x's limitation)

### Rated Life (Driver)

Standard = 100,000 hours

Lutron = 50,000 hours