

VIPER L

LARGE VIPER LUMINAIRE

FEATURES

- Large size companion to Viper Small
- Wide choice of different LED wattage configurations
- Ten optical distributions
- Designed to replace HID lighting up to 1000W MH or HPS
- Suitable for wet locations



See Certification Specifications

CONTROL TECHNOLOGY



SPECIFICATIONS

CONSTRUCTION

- Corrosion resistant, die-cast aluminum housing with powder coat paint finish rated for 1000 hour salt spray.
- External hardware is corrosion resistant

OPTICS

- Cartridge is held together with internal brass standoffs soldered to the board so that it can be field replaced as a one-piece optical system
- One-piece silicone gasket ensures a weatherproof seal around each individual optic
- One-piece optical cartridge system consisting of an LED engine, optics, gasket and stainless steel bezel

INSTALLATION

- Mounting options for horizontal arm, vertical tenon or traditional arm mounting available. Mounting hardware included

ELECTRICAL

- Luminaire accepts 100V through 277V, 347V or 480V input 50 Hz to 60 Hz (UNV)
- Power factor is $\geq .90$ at full load
- Dimming drivers are standard, 0-10V dimming leads available for use with control devices (provided by others)
- Component-to-component wiring within the luminaire may carry no more than 80% of rated load and is certified by UL for use at 600VAC at 90°C or higher
- Plug disconnects are certified by UL for use at 600 VAC, 13A or higher. 13A rating applies to primary (AC) side only

ELECTRICAL (CONTINUED)

- Fixture electrical compartment contains all LED driver components
- Optional 7-pin ANSI C136.41-2013 Twist-Lock® photo control receptacle available. Compatible with ANSI C136.41 external wireless control devices
- Ambient operating temperature -40°C to 25°C
- Surge protection: 20kA
- Lifeshield™ Circuit ([see Electrical Data](#))

CONTROLS

- Available with an optional passive infrared (PIR) motion sensor capable of detecting motion 360° around the luminaire. When no motion is detected for the specified time, the motion response system reduces the wattage to factory preset level, reducing the light level accordingly. When motion is detected by the PIR sensor, the luminaire returns to full wattage and full light output. Please contact Beacon Products if project requirements vary from standard configuration

CONTROLS (CONTINUED)

- In addition, Viper can be specified with [SiteSync™ wireless control system](#) for reduction in energy and maintenance costs while optimizing light quality 24/7

OPTICS STRIKE



RELATED PRODUCTS

[Viper Small](#)

CERTIFICATIONS

- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org
- Certified to UL 1598 and UL 8750
- 3G rated for ANSI C136.31 high vibration applications with MAF mounting
- This product is approved by the Florida Fish and Wildlife Conservation Commission. [Separate spec available online](#)
- This product qualifies as a “designated country construction material” per FAR 52.225-11 Buy American-Construction Materials under Trade Agreements effective 06/03/2020. See [Buy American Solutions](#).

WARRANTY

- 5 year warranty
- See [HLI Commercial and Industrial Outdoor Lighting Warranty](#) for additional information

KEY DATA	
Lumen Range	14,283–39,969
Wattage Range	64–395
Efficacy Range (LPW)	98–135
Reported Life (Hours)	L70>377,000
Input Current Range (Amps)	0.3–4.0

VIPER L

LARGE VIPER LUMINAIRE

ORDERING GUIDE

Example: VPL-96L-280-4K7-4W-UNV-A-DBT-GENI-04-BC

CATALOG #

VPL					
Series	LED Engine	CCT/CRI ⁷	Distribution	Rotation	Voltage
VPL Viper Large	64L-135 135W LED array 80L-180 180W LED array 80L-235 235W LED array 96L-220 220W LED array 96L-280 280W LED array 96L-315 315W LED array 96L-395 395W LED array	3K7 3000K, 70 CRI 4K7 4000K, 70 CRI 5K7 5000K, 70 CRI	FR Type 1/Front Row 2 Type 2 3 Type 3 4F (formerly 4) Type 4 4W Type 4 Wide 5QM Type 5QM 5QN Type 5QN 5R Type 5R (rectangular) 5W Type 5W (round wide) TC Tennis Court CR Corner Right CL Corner Left	Blank No rotation L Optic rotation left ⁵ R Optic rotation right ⁵	UNV 120-277V 347 347V 480 480V

Mounting	Color	Network Control Options	Options
A Rectangular Arm (formerly RA) for square pole A3 Arm for round pole 2.4"-4.2" OD A4 Arm for round pole 4.18" - 5.25" OD A5 Arm for round pole 5.5" - 6.5" OD MAF Mast Arm Fitter (formerly SF2) for 2 3/8" OD horizontal arm K Knuckle (formerly PK2) limit to 30° tilt or 2 3/8" OD horizontal arm or vertical tenon WB Wall Bracket AD Universal Arm for square pole AD3 Universal Arm with adapter for 2.4"-4.1" round pole AD4 Universal Arm with adapter for 4.2"-5.3" round pole AD5 Universal Arm with adapter for 5.5"-5.9" round pole AD6 Universal Arm with adapter for 6.0"-6.5" round pole	BLT Black Matte Textured BLS Black Gloss Smooth DBT Dark Bronze Matte Textured DBS Dark Brone Gloss Smooth GTT Graphite Matte Textured LGS Light Grey Gloss Smooth PSS Platinum Silver Smooth WHT White Matte Textured WHS White Gloss Smooth VG Verde Green Textured Color Option CC Custom Color	NXWE NX Wireless Enabled (module + radio) NXSPW_F Nx Wireless, PIR Occ. Sensor, Daylight Harvesting ² NXSP_F NX, PIR Occ. Sensor, Daylight Harvesting ² WIR Wireless Controls, wiSCAPE SWP SiteSync Pre-Commission ^{1,4} SWPM_F SiteSync Pre-Commission w/ Sensor ^{1,2,4} Control Options 7PR 7-Pin Receptacle only (shorting cap, photo control, or wireless control provided by others) 7PR-SC 7-Pin Receptacle w/Shorting Cap 7PR-TL 7-Pin Receptacle w/Twist-Lock® photo control GENI-XX ENERGENI ³ Sensors BTS_F Bluetooth Programmable, PIR Occupancy/Daylight Sensor, 360° lens ^{7,9,10} BTSO_F Bluetooth Programmable, PIR Occupancy/Daylight Sensor, 360° lens, up to 12' mounting height ^{8,9,10} SCP/_F Programmable Occupancy Sensor w/ daylight control ^{1,2,6}	BC Backsheid (available for FR, 2, 3, 4, 4W Optics) CD Continuous Dimming F Fusing TB Terminal Block

House Side Shield Accessories

- ☐ **HSS/EVP-L/90-FB/XXX** 90° shield front or back
- ☐ **HSS/EVP-L/90-LR/XXX** 90° shield left or right
- ☐ **HSS/EVP-L/270-FB/XXX** 270° shield front or back
- ☐ **HSS/EVP-L/270-LR/XXX** 270° shield left or right
- ☐ **HSS/EVP-L/360/XXX** Full shield

Replace XXX with notation for desired finish color. Refer to page 8 for shield images.

Mounting Accessories

- ☐ **VPL-AD-RPA3** 2.4"-4.1" Round Pole Adapter for AD arm
- ☐ **VPL-AD-RPA4** 4.2"-5.3" Round Pole Adapter for AD arm
- ☐ **VPL-AD-RPA5** 5.5"-5.9" Round Pole Adapter for AD arm
- ☐ **VPL-AD-RPA6** 6.0"-6.5" Round Pole Adapter for AD arm

Notes:

- Not available with other wireless control or sensor options
- Specify mounting height: 8 = 8' or less, 40 = 14' to 40'
- Specify routine setting code (example GENI-04). See [ENERGENI brochure](#) and [instructions](#) for setting table and options. Not available with sensor or SiteSync options
- Specify group and zone at time of order. See [www.hubbelllighting.com/sitesync](#) for further details. Order at least one SiteSync interface accessory SWUSB or SWTAB. Each option contains SiteSync License, GUI, and Bridge Node
- Only available with FR, 2, 3, 4, 4W and 5R distributions
- Order at least one SCP-REMOTE per project location to program and control the occupancy sensor
- Replace "_" with "14" for up to 14' mounting height, "40F" for 15-40' mounting height
- Replace "_" with "12" for up to 12' mounting height
- Not available with any other control or photocell receptacle
- Not available with 347V and 480V above 300W

VIPER L

LARGE VIPER LUMINAIRE

ORDERING GUIDE (CONTINUED)

Accessories and Services (Ordered Separately)

- ☐ **SCP-REMOTE** Remote Control for SCP/_F option. Order at least one per project to program and control the occupancy sensor
- ☐ **SWUSB*** SiteSync interface software loaded on USB flash drive for use with owner supplied PC (Windows based only). Includes SiteSync license, software and USB radio bridge node
- ☐ **SWTAB*** Windows tablet and SiteSync interface software. Includes tablet with preloaded software, SiteSync license and USB radio bridge node
- ☐ **SWBRG** SiteSync USB radio bridge node only. Order if a replacement is required or if an extra bridge node is requested
- ☐ **SW7PR+** SiteSync 7-Pin on fixture module On/Off/Dim, Daylight Sensor 120–480VAC
- ☐ **BIRD-SPIKE-4** Bird Spikes

* When ordering SiteSync at least one of these two interface options must be ordered per project.
+ Available as a SiteSync retrofit solution for fixtures with an existing 7-pin receptacle.

Hubbell Control Solutions — Accessories (Sold Separately)

NX Distributed Intelligence™

- ☐ **NXOFM-1R1D-UNV** On-fixture Module (7-pin), On / Off / Dim, Daylight Sensor with HubbNET Radio and Bluetooth® Radio, 120–480VAC

wiSCAPE® Lighting Control

- ☐ **WIR-RME-L** On-fixture Module (7-pin or 5-pin), On / Off / Dim, Daylight Sensor with wiSCAPE Radio, 110–480VAC

For additional information related to these accessories please visit www.hubbellcontrolsolutions.com. Options provided for use with integrated sensor, please view specification sheet ordering information table for details.

CONTROLS

SiteSync — Precommissioned Ordering Information:

When ordering a fixture with the SiteSync lighting control option, additional information will be required to complete the order. The SiteSync Commissioning Form or alternate schedule information must be completed. This form includes Project location, Group information, and Operating schedules. For more detailed information please visit the SiteSync family page on our website or contact Hubbell Lighting tech support at 800-888-8006.



SiteSync fixtures with Motion control (SWPM) require the mounting height of the fixture for selection of the lens.

Examples: VP-L/80L-235/4K7/3/UNV/A/DB/SWP/ SiteSync only
VP-L/80L-235/4K7/3/UNV/A/DB/SWPM-40F/ SiteSync with Motion Control

SiteSync 7-Pin Module:

- SiteSync features in a new form
- Available as an accessory for new construction or retrofit applications (with existing 7-Pin receptacle)
- Does not interface with occupancy sensors



SW7PR

NX Distributed Intelligence™ Lighting Controls:

Supports both indoor and outdoor applications in a variety of deployment options: wired, wireless and hybrid. Integrates with and enables a wide array of luminaires including those with SpectraSync Color Tuning Technology.



NX Integrated Controls Reference								
NX Option	Sensor	Networkable	Scheduling	Occupancy	Daylight Harvesting	0–10V Dimming	On/off Control	Bluetooth® App Programming
NX Networked – Wireless								
NXOFM-1R1D-UNV	SCLNX	Yes	Yes	Yes	Yes	Yes	Yes	Yes, Bluetooth App

wiSCAPE™:

Supports remote management, monitoring and metering of outdoor wireless lighting applications such as smart campuses, smart cities, parking lots, parking lots and roadways.



wiSCAPE Reference								
wiSCAPE Option	Sensor	Networkable	Scheduling	Occupancy	Daylight Harvesting	0–10V Dimming	On/off Control	Bluetooth® App Programming
Networked – Wireless								
WIR-RME-L	WIR-RME-L	Yes	Yes	No	Yes	Yes	Yes	wiSCAPE Gateway

VIPER L

LARGE VIPER LUMINAIRE

DELIVERED LUMENS

# of LEDs	DRIVE CURRENT (mA)	SYSTEM WATTS	DISTRIBUTION TYPE	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 70 CRI)				
				LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G
64	625 mA	135W	1A	18220	132	2	0	2	18783	137	2	0	2	16341	119	2	0	2
			2	17228	125	2	0	2	17761	129	2	0	2	15452	112	2	0	2
			3	17257	125	2	0	3	17791	129	2	0	3	15478	112	2	0	3
			4	16864	123	1	0	4	17386	126	1	0	4	15125	110	1	0	3
			4W	15106	112	2	0	4	15573	115	2	0	4	13237	98	2	0	3
			5QM	17259	125	4	0	2	17792	129	4	0	2	15479	112	4	0	2
			5QN	18023	131	4	0	0	18580	135	4	0	0	16165	117	4	0	0
			5R	17410	127	4	0	4	17948	130	4	0	4	15615	113	4	0	4
			5W	16498	120	4	0	2	17009	124	4	0	3	14797	108	4	0	2
			TC	15925	110	2	1	2	16417	113	2	1	2	14283	98	1	1	2
			CL	17350	128	3	0	3	17886	132	3	0	3	15561	114	2	0	3
			CR	17407	128	3	0	3	17945	132	3	0	3	15612	115	2	0	3
80	700 mA	180W	1A	23230	128	2	0	2	23948	132	2	0	2	20835	115	2	0	2
			2	21965	121	3	0	3	22645	125	3	0	3	19701	109	2	0	3
			3	22003	121	2	0	4	22683	125	3	0	4	19734	109	2	0	4
			4	21502	119	2	0	4	22167	122	2	0	4	19285	106	2	0	4
			4W	19260	107	2	0	4	19856	110	2	0	4	16877	94	2	0	4
			5QM	22005	121	4	0	2	22686	125	4	0	2	19736	109	4	0	2
			5QN	22979	127	4	0	1	23689	131	4	0	1	20610	114	4	0	0
			5R	22197	122	4	0	4	22884	126	4	0	4	19909	110	4	0	4
			5W	21035	116	5	0	3	21686	120	5	0	3	18867	104	4	0	3
			TC	19906	110	2	1	2	20522	113	2	1	2	17854	98	2	1	2
			CL	22121	123	3	0	4	22805	127	3	0	4	19840	110	3	0	4
			CR	22193	123	3	0	4	22879	127	3	0	4	19905	111	3	0	4
80	875 mA	235W	1A	27849	121	2	0	2	28711	125	2	0	2	24978	108	2	0	2
			2	26334	114	3	0	3	27148	118	3	0	4	23619	102	3	0	3
			3	26378	114	3	0	4	27194	118	3	0	4	23659	103	3	0	4
			4	25777	112	2	0	4	26575	115	2	0	5	23120	100	2	0	4
			4W	23090	98	2	0	5	23805	101	2	0	5	20234	86	2	0	4
			5QM	26381	114	4	0	2	27196	118	4	0	2	23661	103	4	0	2
			5QN	27548	119	5	0	1	28400	123	5	0	1	24708	107	5	0	1
			5R	26611	115	5	0	5	27434	119	5	0	5	23868	104	4	0	4
			5W	25218	109	5	0	3	25998	113	5	0	3	22619	98	5	0	3
			TC	23864	103	2	1	2	24602	107	2	1	2	21404	93	2	1	2
			CL	26520	113	3	0	4	27340	116	3	0	4	23786	101	3	0	4
			CR	26606	113	3	0	4	27429	117	3	0	4	23864	102	3	0	4
96	700 mA	220W	1A	27876	128	2	0	2	28738	132	2	0	2	25002	115	2	0	2
			2	26359	121	3	0	3	27174	125	3	0	4	23641	109	3	0	3
			3	26403	121	3	0	4	27220	125	3	0	4	23681	109	3	0	4
			4	25802	119	2	0	4	26600	122	2	0	5	23142	106	2	0	4
			4W	23111	105	2	0	5	23826	108	2	0	5	20252	92	2	0	4
			5QM	26406	121	4	0	2	27222	125	4	0	2	23684	109	4	0	2
			5QN	27575	127	5	0	1	28427	131	5	0	1	24732	114	5	0	1
			5R	26637	122	5	0	5	27460	126	5	0	5	23891	110	4	0	4
			5W	25242	116	5	0	3	26023	120	5	0	3	22640	104	5	0	3
			TC	23887	110	2	1	2	24626	113	2	1	2	21424	98	2	1	2
			CL	26545	121	3	0	4	27366	124	3	0	4	23809	108	3	0	4
			CR	26632	121	3	0	4	27456	125	3	0	4	23886	109	3	0	4
96	875 mA	280W	1A	33419	121	3	0	2	34453	125	3	0	2	29974	108	2	0	2
			2	31600	114	3	0	4	32577	118	3	0	4	28342	102	3	0	4
			3	31654	114	3	0	5	32633	118	3	0	5	28390	103	3	0	4
			4	30933	112	2	0	5	31889	115	2	0	5	27744	100	2	0	5
			4W	27708	99	3	0	5	28564	102	3	0	5	24280	87	2	0	5
			5QM	31657	114	5	0	3	32636	118	5	0	3	28393	103	4	0	2
			5QN	33058	119	5	0	1	34080	123	5	0	1	29650	101	5	0	1
			5R	31933	115	5	0	5	32921	119	5	0	5	28641	104	5	0	5
			5W	30262	109	5	0	4	31198	113	5	0	4	27142	98	5	0	3
			TC	28642	104	2	1	3	29528	107	2	1	3	25690	93	2	1	2
			CL	31824	106	3	0	5	32808	110	3	0	5	28543	95	3	0	4
			CR	31928	107	3	0	5	32915	110	3	0	5	28636	96	3	0	4
96	1000mA	315W ²	1A	35666	113	3	0	2	36769	117	3	0	2	31989	101	2	0	2
			2	33725	107	3	0	4	34768	110	3	0	4	30248	96	3	0	4
			3	33782	107	3	0	5	34827	110	3	0	5	30299	96	3	0	4
			4	33012	105	2	0	5	34033	108	2	0	5	29609	94	2	0	5
			4W	29571	94	3	0	5	30485	97	3	0	5	25913	82	2	0	5
			5QM	33785	107	5	0	3	34830	110	5	0	3	30302	96	5	0	2
			5QN	35280	112	5	0	1	36371	115	5	0	1	31643	100	5	0	1
			5R	34080	108	5	0	5	35134	111	5	0	5	30567	97	5	0	5
			5W	32302	102	5	0	4	33301	106	5	0	4	28972	92	5	0	4
			TC	30568	97	2	1	3	31513	100	3	1	3	27416	87	2	1	3
			CL	33964	107	3	0	5	35014	111	3	0	5	30462	96	3	0	5
			CR	34074	108	3	0	5	35128	111	3	0	5	30561	97	3	0	5

96 LED continues on page 4

1 Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment and application.

2 315W and 395W 3000K versions are not DLC QPL listed. Reference dark gray highlighted cells in table.

VIPER L



LARGE VIPER LUMINAIRE

DELIVERED LUMENS

# of LEDs	DRIVE CURRENT (mA)	SYSTEM WATTS	DISTRIBUTION TYPE	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 70 CRI)				
				LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G
96	1225mA	395W ²	1A	39569	101	3	0	4	43125	110	3	0	3	37518	96	3	0	2
			2	39569	101	3	0	4	40793	104	3	0	4	35490	91	3	0	4
			3	39619	101	3	0	5	40845	104	3	0	5	35535	91	3	0	5
			4	38723	98	3	0	5	39921	101	3	0	5	34731	88	2	0	5
			4W	34691	86	3	0	5	35764	89	3	0	5	30400	76	3	0	5
			5QM	39623	101	5	0	3	40848	104	5	0	3	35538	90	5	0	3
			5QN	41394	105	5	0	1	42675	109	5	0	1	37127	95	5	0	1
			5R	39969	102	5	0	5	41205	105	5	0	5	35848	91	5	0	5
			5W	37877	97	5	0	4	39048	100	5	0	4	33986	87	5	0	4
			TC	35850	90	3	1	3	36959	93	3	1	3	32154	81	3	1	3
			CL	39834	100	3	0	5	41066	103	4	0	5	35727	90	3	0	5
			CR	39964	101	3	0	5	41200	104	4	0	5	35844	90	3	0	5

- 1 Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment and application.
- 2 315W and 395W 3000K versions are not DLC QPL listed. Reference dark gray highlighted cells in table.

DIMENSIONS

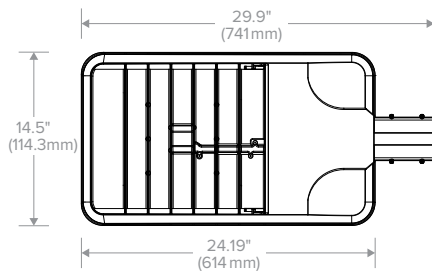


Weight	25.0 lbs (11.3 kg)
EPA	1.2 ft ²

A Arm (formerly RA)



Side View




Back View

MAF (formerly SF2)




Side View



Back View



Accepts 2 3/8" OD tenon, min 5" long.

2 3/8" Adjustable Knuckle (K) (formerly PK2)


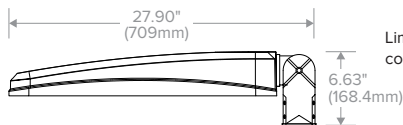


Limit to 30° tilt. Sensor, photocells and wireless controls should not be tilted above horizontal.

Wall Bracket (WB)

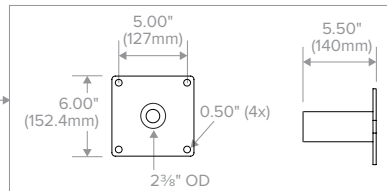

AD Decorative Arm

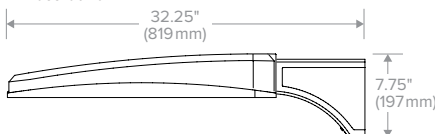

See page 9 for mounting details.


VIPER L

LARGE VIPER LUMINAIRE


PHOTOMETRY

The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see [website photometric test reports](#).


Type FR – Front Row/Auto Optic




Type 2




Type 3




Type 4




Type 4 Wide




Type 5QM




Type 5QN




Type 5R (rectangular)



Type 5W (round wide)



Type TC



VIPER L

LARGE VIPER LUMINAIRE

ELECTRICAL DATA

# OF LEDS	NUMBER OF DRIVERS	DRIVE CURRENT (mA)	INPUT VOLTAGE (V)	SYSTEM POWER (w)	CURRENT (Amps)
64	1	625 mA	120	135	1.4
			277		0.6
			347		0.5
			480		0.3
80	2	700 mA	120	180	1.8
			277		0.8
			347		0.6
			480		0.5
80	2	875 mA	120	235	2.4
			277		1
			347		0.8
			480		0.6
96	2	700 mA	120	220	2.2
			277		1
			347		0.8
			480		0.6
96	2	875 mA	120	280	2.8
			277		1.2
			347		1
			480		0.7
96	2	1000 mA	120	315	3.2
			277		1.4
			347		1.1
			480		0.8
96	2	1225 mA	120	395	4
			277		1.7
			347		1.4
			480		1

PROJECTED LUMEN MAINTENANCE						
Ambient Temp.	0	25,000	50,000	TM-21-11 60,000 ¹	100,000	Calculated L70 (HOURS)
25°C / 77°C	1	0.98	0.97	0.97	0.96	>377,000


¹ Projected per IESNA TM-21-11.
 Data references the extrapolated performance projections for the 700mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.

LIFESHIELD™ CIRCUIT

Protects luminaire from excessive temperature. The device activates at a specific, factory-preset temperature and progressively reduces power over a finite temperature range. Operation is smooth and undetectable to the eye. Thermal circuit is designed to “fail on”, allowing the luminaire to revert to full power in the event of an interruption of its power supply or faulty wiring connection to the drivers. The device can co-exist with other 0–10V control devices (occupancy sensors, external dimmers, etc.)

ADDITIONAL INFORMATION

ROTATION OPTIONS

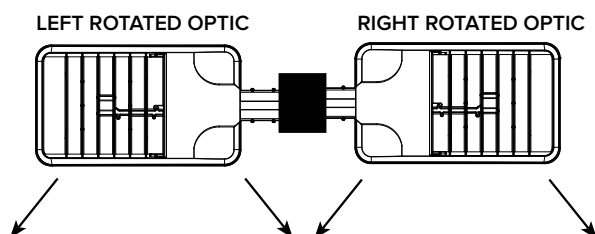

VIPER L

LARGE VIPER LUMINAIRE


DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ADDITIONAL INFORMATION (CONTINUED)

DRILL PATTERN


RECTANGULAR ARM (A)

Compatible with Pole drill pattern B3

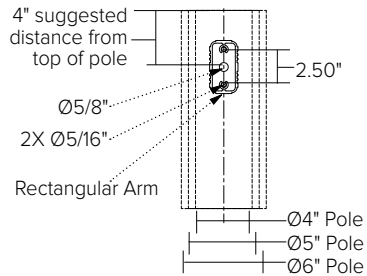


EPA

Config.	EPA
1	1.2
2 @ 90°	1.9
2 @ 180°	2.4



Config.	EPA
3 @ 120°	3.0
3 @ 90°	3.1
4 @ 90°	3.8




TENON TOP POLE BRACKET ACCESSORIES (ORDER SEPARATELY)

(2 3/8" OD tenon)


TENON TOP POLE BRACKET ACCESSORIES (Order Separately)

- ☐ **SETAVP-XX** Square tenon adapter (4 at 90°) for A - Rectangular Arm mounting option only
- ☐ **RETAVP-XX** Round tenon adapter (4 at 90°) for A - Rectangular Arm mounting option only
- ☐ **SETA2XX** Square tenon adapter (4 at 90°) for AD - Universal Arm mounting option only
- ☐ **RETA2XX** Round tenon adapter (4 at 90°) for AD3 - Universal Arm mounting option only


HOUSE SIDE SHIELD FIELD INSTALL ACCESSORIES




HSS/VP-L/90-FB/XXX
90° shield front or back
(2 shields shown)




HSS/VP-L/90-LR/XXX
90° shield left or right
(1 shield shown in left orientation)



HSS/VP-L/270-FB/XXX
270° shield front or back
(1 shield shown in back orientation)



HSS/VP-L/270-LR/XXX
270° shield left or right
(1 shield shown in right orientation)



HSS/VP-L/360/XXX
Full shield
(1 shield shown)


VIPER L

LARGE VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


ADDITIONAL INFORMATION (CONTINUED)

AD ARM MOUNTING INSTRUCTIONS

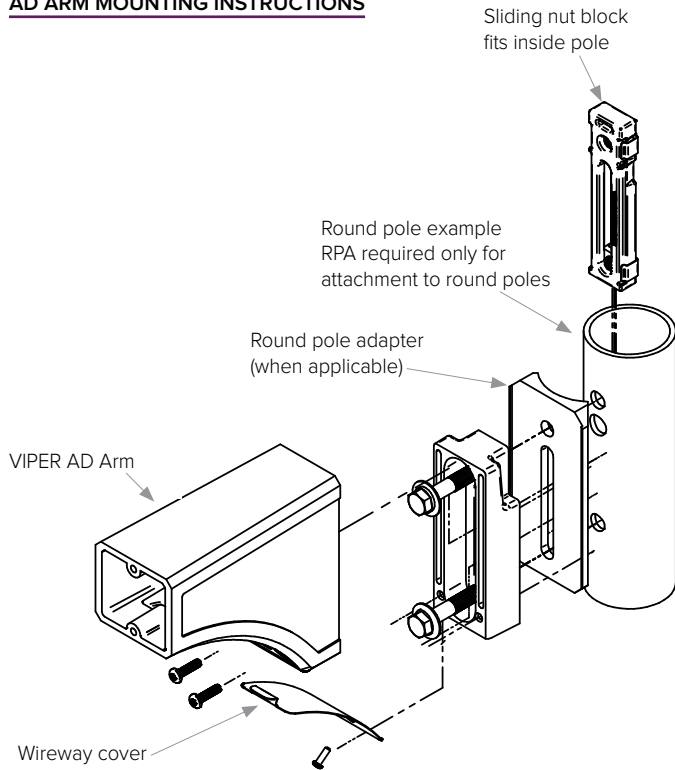

DECORATIVE ARM (AD)

Compatible with pole drill pattern S2



USE OF TRADEMARKS AND TRADE NAMES

All product and company names, logos and product identifies are trademarks ™ or registered trademarks ® of Hubbell Lighting, Inc. or their respective owners. Use of them does not necessarily imply any affiliation with or endorsement by such respective owners.