

## FEATURES


- Switchable Lumen technology:  
5000/6000/7000 (4' size)  
8500/10,000/12,000 (8' size)
- Switchable CCT: 3500K/4000K/5000K
- 0–10V dimming to 10%
- IP65 rated
- Up to 132 lm/w
- 80 CRI
- -40°C to 40°C ambient
- Universal voltage (120–347V)



tradeSELECT®



Typical Dimensions and Weights				
Size	Length (in)	Width (in)	Height (in)	Approx Weight (lbs)
4-ft	47.2	3.5	3.1	4.6
8-ft	94.5	3.5	3.1	9.9



## SPECIFICATIONS

### CONSTRUCTION

- Durable, UL 5VA Polycarbonate housing. Suitable for through-wiring applications
- Stainless steel latches provide a strong, corrosive resistant closing mechanism that meets NSF criteria
- Includes sealed conduit adapter for ½" conduit on one end with a knockout on the other end should access be required

### OPTICS

- Frosted polycarbonate lens design for optimal illumination and high impact durability

### INSTALLATION

- Installation hardware included for both surface mounting (pair of surface mount brackets) and suspended mounting (pair of V brackets). Cables or chains are not included
- Conduit entry with internal wiring access. Refer to installation instructions for details

### ELECTRICAL

- Long-life LEDs with a lifetime of L70 at > 100,000 hrs
- 0–10V dimming to 10%
- Operates at 120–347V input
- Switchable Lumen and switchable CCT technology allow for easy field adjustment with three level switches located on gear tray
- Switchable fixture ships at the highest lumen and most popular CCT setting, 5000K

### CERTIFICATIONS

- All luminaires are built to UL 1598 wet location standards, have IP65 rating, and bear appropriate labels
- Adheres to LM79, LM80, and TM21 industry standards for photometrics and lifetime calculations
- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at [www.designlights.org](http://www.designlights.org)
- Meets NSF 2 Food Equipment standards for non- food zone and splash zone
- NEMA 250 Type 4X rated

### WARRANTY

- 5 year warranty

## STOCKED OPTIONS

Catalog Number	Individual Unit Part Number & UPC	Description	Setting	Lumens			Watts	Lumens Per Watt (LPW)			Master Carton Qty & UPC	DLC Listing
				3500K	4000K	5000K		3500K	4000K	5000K		
CVT4-LSCS-MV	SKU: 93310090 UPC: 840141431420	4' Linear Vapor Tight; Switchable Lumens (5500/6500/7500); Switchable CCT (3500/4000/5000K); 120-347V; 0-10v Dimming to 10%	LOW	5206	5586	5282	38	137	147	139	4 Each 10840141431427	S-DGRP21
			MED	6072	6532	6164	46	132	142	134		
			HIGH	6912	7452	7020	54	128	138	130		
CVT8-LSCS-MV	SKU: 93310091 UPC: 840141431437	8' Linear Vapor Tight; Switchable Lumens (9600/10800/12700); Switchable CCT (3500/4000/5000K); 120-347V; 0-10v Dimming to 10%	LOW	8970	9620	9100	65	138	148	140	4 Each 10840141431434	S-SAJ91X
			MED	10125	10875	10275	75	135	145	137		
			HIGH	11880	12780	12060	90	132	142	134		

DATE:


LOCATION:

TYPE:

PROJECT:

CATALOG #:

DIMENSIONS

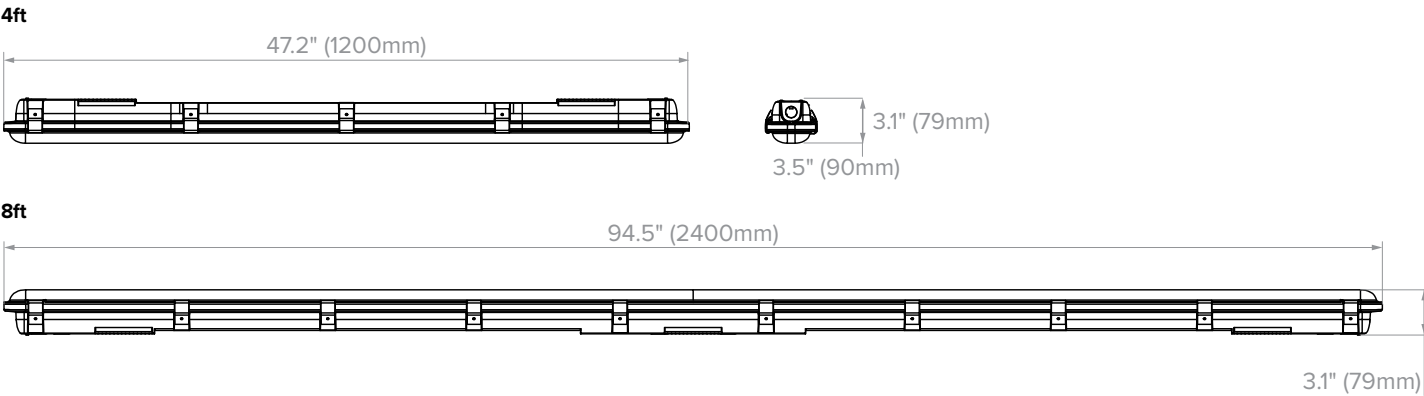

Length	Fixtures per Pallet
4-ft	33
8-ft	33



Conduit Hub Shown  
\*two conduit hubs are provided with each fixture for use during fixture installation