

DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____

FEATURES

- Switchable Lumen technology:
5000/6000/7000 (4' size)
8500/10,000/12,000 (8' size)
- Switchable CCT: 3500K/4000K/5000K
- 0–10V dimming to 10%
- IP65 rated
- Up to 132 lm/w
- 80 CRI
- -40°C to 40°C ambient
- Universal voltage (120–277V)



tradeSELECT®



Typical Dimensions and Weights				
Size	Length (in)	Width (in)	Height (in)	Approx Weight (lbs)
4-ft	47.2	3.5	3.1	4.6
8-ft	94.5	3.5	3.1	9.9



SPECIFICATIONS

CONSTRUCTION

- Durable, UL 5VA Polycarbonate housing. Suitable for through-wiring applications
- Stainless steel latches provide a strong, corrosive resistant closing mechanism that meets NSF criteria
- Includes sealed conduit adapter for ½" conduit on one end with a knockout on the other end should access be required

OPTICS

- Frosted polycarbonate lens design for optimal illumination and high impact durability

INSTALLATION

- Installation hardware included for both surface mounting (pair of surface mount brackets) and suspended mounting (pair of V brackets). Cables or chains are not included
- Conduit entry with internal wiring access. Refer to installation instructions for details

ELECTRICAL

- Long-life LEDs with a lifetime of L70 at > 100,000 hrs
- 0–10V dimming to 10%
- Operates at 120–277V input
- Switchable Lumen and switchable CCT technology allow for easy field adjustment with three level switches located on gear tray
- Switchable fixture ships at the highest lumen and most popular CCT setting, 5000K

CERTIFICATIONS

- All luminaires are built to UL 1598 wet location standards, have IP65 rating, and bear appropriate labels
- Adheres to LM79, LM80, and TM21 industry standards for photometrics and lifetime calculations
- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

WARRANTY

- 5 year warranty

ORDERING GUIDE

CVT	Model	Size	LSCS
CVT Linear Vaportite	4	4ft	LSCS Lumen Switchable 4ft 5000/6000/7000 lm 8ft 8500/10,000/12,000 lm Color Switchable 3500/4000/5000K
	8	8ft	

STOCKED OPTIONS

Catalog Number	SKU	UPC	Description	Setting	Lumens	Watts	Voltage
CVT4-LSCS	93161654	840141423722	4' Linear Vaportite	Low	4940	38	120-277V
				Med	5980	45	
				High	7020	53	
CVT8-LSCS	93161655	840141423739	8' Linear Vaportite	Low	8450	64	120-277V
				Med	9750	74	
				High	11,700	89	

KEY DATA	
Lumen Range	5000–12,000
Wattage Range	38-89
Efficacy Range (LPW)	Up to 132
Life (Hours)	L70 @>100K Hours


DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____


CATALOG #: _____

DIMENSIONS

4ft

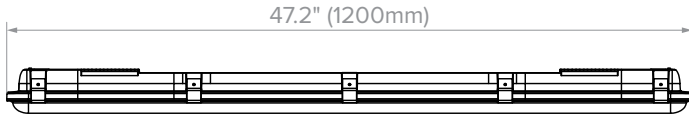

8ft

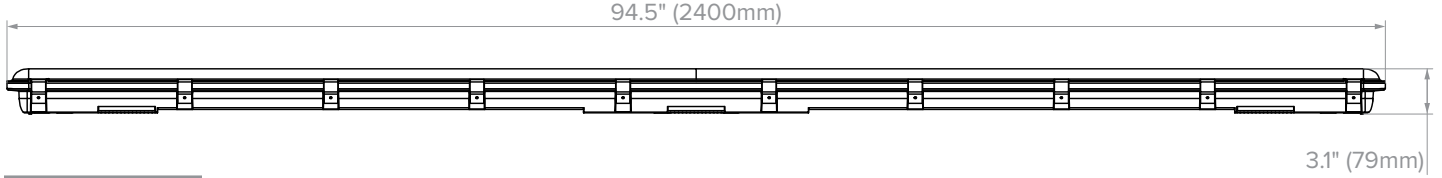

Length	Fixtures per Pallet
4-ft	33
8-ft	33