

tradeSELECT



**FEATURES**

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Damp Location Listed 20°C to 30°C (68°F to 86°F)
- Provided with test switch and AC-On indicator
- Lamp-heads are fully adjustable
- Canopy included



**SPECIFICATIONS**

**DESCRIPTION**

- The CC SQ Series offers quality and value with a compact and attractive LED based combination emergency light and exit sign
- The white Exit housing and lamp-heads are made of high impact UL flame rated thermoplastic
- The square LED lamp-heads are fully adjustable and glare-free

- Snap together design for quick and easy installation with option of wall or ceiling mount
- The CC SQ Series includes a high lumen output lamp-head run at 1.7 watts per lamp

**APPLICATION**

- The CC SQ series can be applied in stairwells, hallways, offices and commercial applications

**COMPLIANCES**

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA

**WARRANTY**

- 2 year full unit warranty


**ORDERING GUIDE**

Catalog Number	Description	Accessories (Order Separately)
CCRHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Red Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp	<b>WGEL</b> 8"H x <b>Wireguard</b> 20"W x 8" D
CCGHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Green Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp	

**ENERGY CONSUMPTION**


	120 VAC	277 VAC
CCRHOSQ	3.9W	3.91W
CCGHOSQ	5.0W	4.85W

**DIMENSIONS**

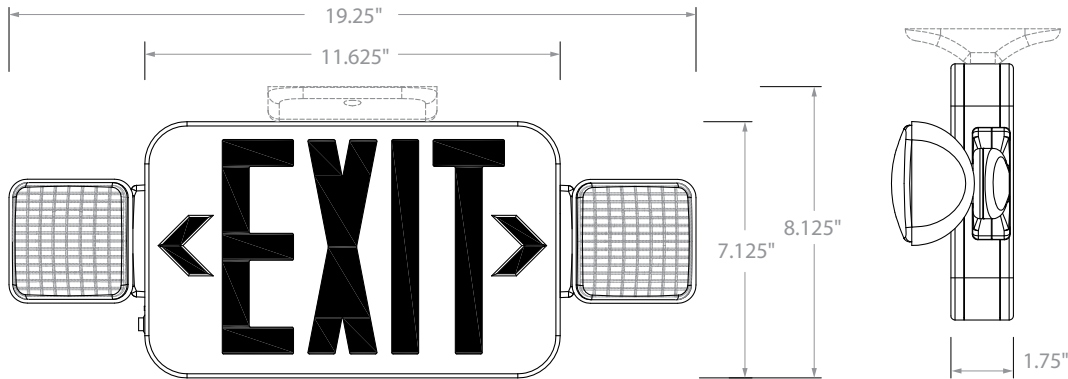

Single Carton Weight	2.5lbs.
Master Carton Quantity	6 each

**APPLICATION INFORMATION**

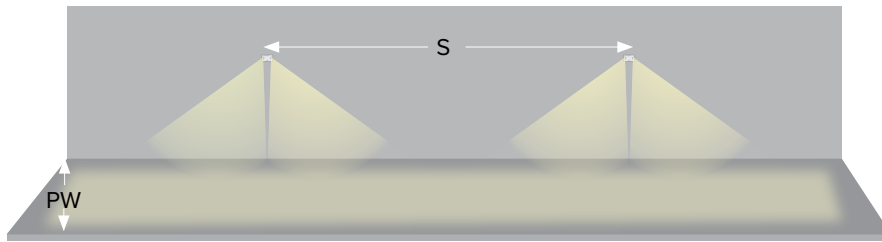

1 fc Average		
Cat #	Path Width (PW)	Spacing (S)
CCSQ	6'	17'

Note: Meets Life Safety Code minimum illuminance of 0.1 fc and average illuminance of 1.0 fc. Assumes open space with no obstructions, ceiling height of 9' and reflectances of 80/50/20. Photometry files available on the website.