

## tradeSELECT®

### FEATURES

- The CWR remote lamps are driven exclusively by the Compass CU2W with remote capacity
- Quick installation
- UL924 listed for 10°C to 40°C (50°F to 104°F)



### SPECIFICATIONS

#### DESCRIPTION

- The CWR single and double remote heads offer quality and value with a compact and attractive LED based outdoor remote emergency light
- Includes mounting base and lampheads in durable die-cast construction. Lampheads are fully gasketed, fully adjustable and glare-free for operation in outdoor and wet environments

- The CWR remote lamps are driven exclusively by the Compass CU2W with remote capacity.

#### APPLICATION

- The CWR remote heads can be applied over path of egress doors in areas affected by rain, moisture and condensation

#### APPLICATION

- UL924

#### WARRANTY

- 2 year full unit warranty

### ORDERING GUIDE




Catalog Number	Description	Voltage	Lamp Watts (Each)
CWRS	Single-head LED Remote CU2W Only, Grey Finish	9.6Vdc	1.0W
CWRD	Double-head LED Remote for CU2W Only, Grey Finish	9.6Vdc	1.0W



CU2W Emergency Light

### DIMENSIONS

CWRS

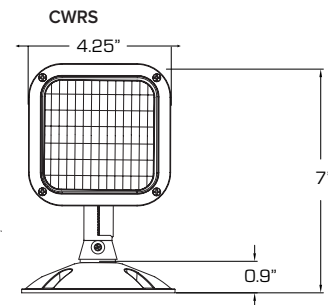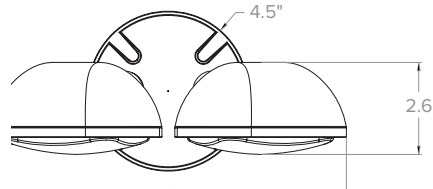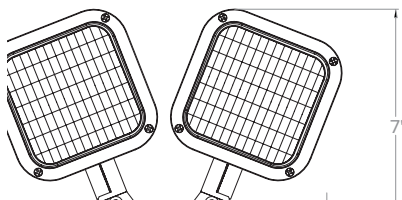

Single Carton Weight (single)	2 lbs.
Single Carton Weight (double)	2 lbs.
Master Carton Quantity	12 each

Note:  
Photometric files available for download on the Compass website  
Outlet box must have a minimum depth of 3" (Not Included)